MILITARY SPECIFICATION

# BATTERY, DRY, BA-382/U

This specification has been approved by the
Bureau of Naval Weapons, Department of the Navy.

## 1. SCOPE

1.1 Scope. - This specification covers the detail requirements for the Battery, Dry, BA-382/U, a Category I battery.

## 2. APPLICABLE DOCUMENTS

2.1 The following standard and specification of the issue in effect on date of invitation for bids, form a part of this specification, to the extent specified herein.

SPECIFICATION

MILITARY

MIL-B-18 Batteries, Dry.

STANDARD

MILITARY

MIL-STD-8 Dimensioning and tolerancing.

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

## 3. REQUIREMENTS

3.1 Requirements shall be in accordance with Military Specification MIL-B-18, and as specified herein.

3.1.1 General.

Nominal voltage - - - - - - 67.5 volts
Usual number and type of cells - - - - - 45 "N" cells in series.
Terminals - - - - - - - - - Snap-on (See Figure 1)
Maximum weight- - - - - - 14 ounces
Dimensions and Wiring - - See figures 1 & 2

3.1.2 Electrical.

Open-circuit voltage - - 75 volts max.
Closed-circuit voltage - 63.4 volts min. through 5400 ohms for 5 seconds
Insulation resistance test II - - - - - - - - - - 50 megohms min.

3.1.3 Magnetic effect. - This battery shall meet all magnetic effect requirements of specification MIL-B-18. Resistance for the magnetic effect under load shall be 16,900 ohms.

3.1.4 Environmental.

Vibration test I
Mechanical shock test I

3.1.5 Capacity. - The battery shall be discharged through 2000 ohms for 2 minutes and then through 5200 ohms for 4 minutes. This cycle shall be repeated continuously. Minimum capacity values shall be as indicated below:

| Test | Minimum Capacity Values (hours) | Test End Voltage (Volts) |
|---|---|---|
| D | 8.8 | 42.0 |
| T | 8.0 | 42.0 |
| DD | 8.8 | 42.0 |

3.1.6 Labeling. - Labeling shall be in accordance with Military Specification MIL-B-18 and Figure 1.

## 4. QUALITY ASSURANCE PROVISIONS

4.1 Preproduction tests. - Five additional sample batteries shall be submitted to the activity designated in the contract. (See 6.1)

4.2 Test equipment. - Test Set TS 183( )/U shall not be used in testing this battery.

FSC 6135

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:56Z
Check the source to verify that this is the current version before use.

4.3 Examinations and tests.

(a) Open-circuit voltage (See 4.3.1)
(b) Closed-circuit voltage (See 4.3.1 and 4.3.3)
(c) Insulation resistance test II (See 4.3.1)
(d) Visual and mechanical examination
(e) Vibration test I
(f) Mechanical shock test I
(g) Magnetic effects tests
(h) Storage (See 4.3.2)
(i) Capacity tests D, T and DD

4.3.1 *Prior to sampling for Group A inspection*, each battery manufactured shall be tested to determine that the requirements for Open-circuit voltage, Closed-circuit voltage and Insulation resistance have been met.

4.3.1.1 Closed-circuit voltage shall be read at end of five second test interval.

4.3.2 Storage for capacity tests.

| | |
|---|---|
| For D Test | 9 months at 70°F, 50% RH |
| For T Test | 3 months at 113°F, 50% RH, and 48 hours at 70°F, 50% RH |
| For DD Test | 18 months at 70°F, 50% RH |

4.3.3 After storage and just prior to D and T capacity discharge, the batteries shall be subjected to the closed-circuit voltage test, at 70°F.

4.4 Inspection of preparation for delivery shall be made to ascertain conformance to Section 5.

5. PREPARATION FOR DELIVERY

5.1 Packaging and packing shall be in accordance with Group I requirements of MIL-B-18, and as follows:

| | |
|---|---|
| Unit package | 10 batteries |
| Approx. inside dimensions | 5-5/8 x 6-7/8 x 3-3/4 inches. |
| Arrangement | 2-5-1 |
| Shipping container | 6 unit packages |
| Approx. inside dimensions | 11-1/2 x 7-1/2 x 11-1/2 inches |
| Arrangement | 2-1-3 |

5.2 Special marking. - The following special marking shall be prominently displayed on each shipping container:

WARNING

FRAGILE, HANDLE WITH CARE. Maintain temperature below 45°F while handling for shipment, during transit, or during storage. INJURIOUS TO CONTENTS if temperature rises above 45°F.

6. NOTES

6.1 Ordering data. - Procurement documents should also specify:

(a) Activity to which additional sample batteries shall be submitted.

(b) The following statements:

(1) When shipping batteries, carrier shall maintain temperature below 45°F.


(2) Batteries shall not be kept in an unrefrigerated condition for more than seven days prior to shipment.

Notice. - When government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may be related thereto.

Preparing activity:
Navy-Bureau of Naval Weapons



Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:56Z
Check the source to verify that this is the current version before use.

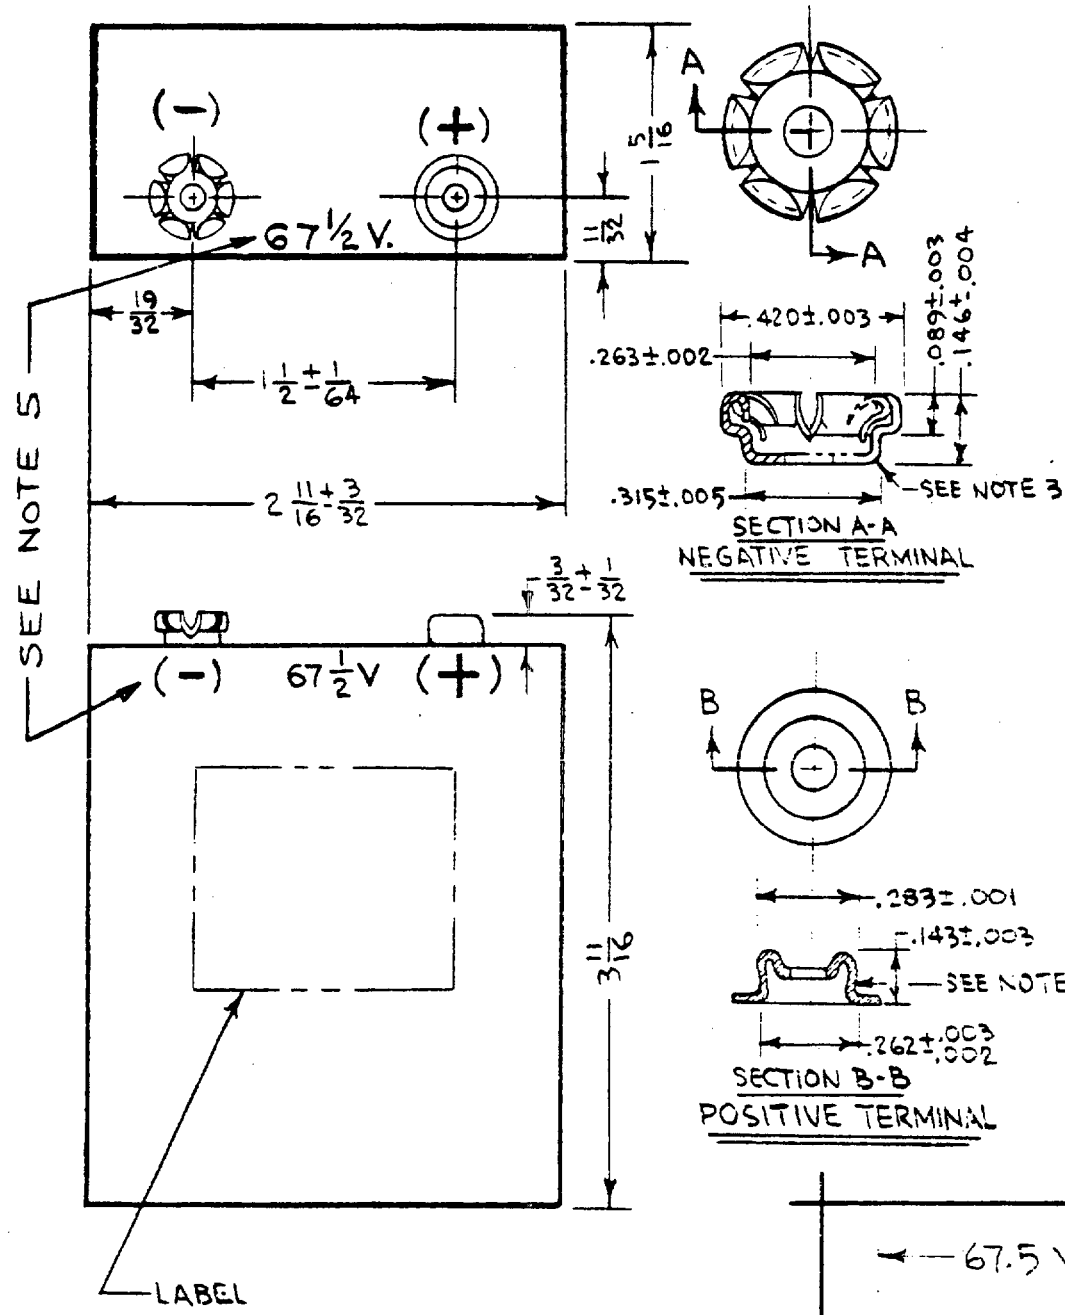


NOTES

1. ALL DIMENSIONS ARE IN INCHES.
2. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ± 1/16.
3. NEGATIVE TERMINAL: PLATED SPRING BRASS, .015 THICK MIN.
4. POSITIVE TERMINAL: PLATED SOFT BRASS, .015 THICK MIN.
5. VOLTAGE AND POLARITY MAY BE SHOWN EITHER ON TOP OR FRONT FACE.

FIGURE 1





FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:56Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

*(See Instructions – Reverse Side)*

| 1. DOCUMENT NUMBER | 2. DOCUMENT TITLE |
|---|---|

| 3a. NAME OF SUBMITTING ORGANIZATION | 4. TYPE OF ORGANIZATION *(Mark one)* |
|---|---|
| b. ADDRESS *(Street, City, State, ZIP Code)* | ☐ VENDOR<br>☐ USER<br>☐ MANUFACTURER<br>☐ OTHER *(Specify)*: _____ |

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

| 7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional | b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional |
|---|---|
| c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional | 8. DATE OF SUBMISSION *(YYMMDD)* |

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:56Z
Check the source to verify that this is the current version before use.