MIL-B-18/244C(ER)
28 May 1985
SUPERSEDING
MIL-B-18/244B(EL)
7 October 1968


MILITARY SPECIFICATION SHEET


BATTERY, DRY, BA-386/PRC-25


This specification is approved for use by all Departments and Agencies of the Department of Defense.


The complete requirements for procuring the dry battery described herein shall consist of this document and the latest issue of Specification MIL-B-18.

INCHES	MM
.005	.13
1/64	.40
1/32	.79
.054	1.37
1/16	1.59
3/32	2.38
1/8	3.18
.150	3.81
.187	4.75
.234	5.94
.312	7.92
7/16	11.11
1/2	12.70
.552	14.02
.562	14.27
.684	17.37
15/16	23.81
1.286	32.66
21/16	52.39
39/16	90.49
97/16	239.71

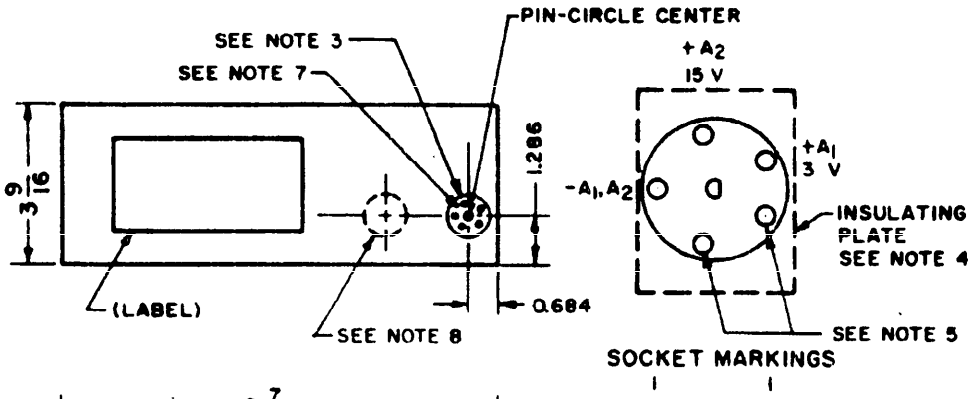

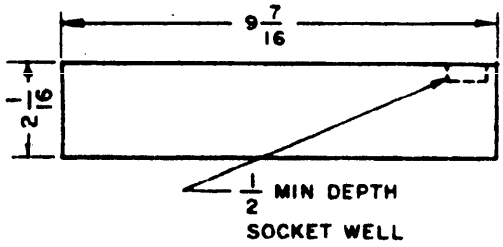

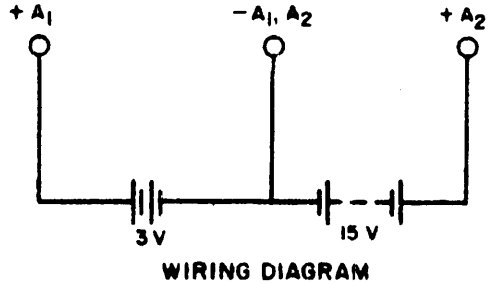

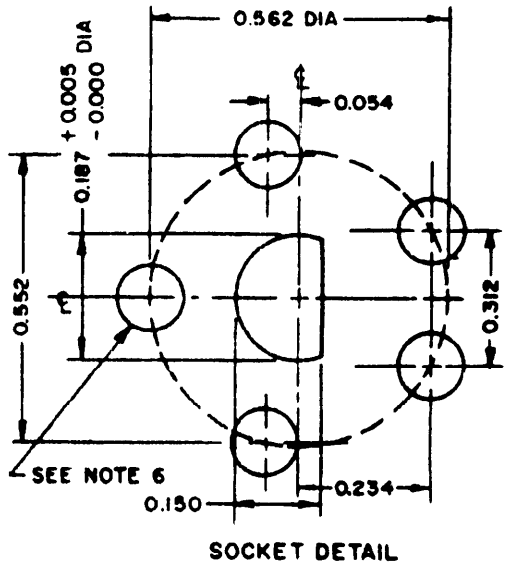

Source: https://assist.dla.mil -- Downloaded: 202610-15T16:56Z
Check the source to verify that this is the current version before use.
© denotes changes

NOTES:

1. All dimensions shown on figure are in inches. Unless otherwise specified tolerances are ± 1/16 inch for fractions and ± .005 for decimals.
2. Metric equivalents specified in table are for general information only and are based upon 1 inch = 25.4 millimeters.
3. The socket opening in the jacket shall be 15/16 ± 1/32 inch and shall be positioned so that its center is within a 1/16 diameter circle whose center coincides with pin circle center.
4. The length and width of the top and bottom socket insulating plates are optional.
5. Socket insert contacts not required.
6. Five holes to fit 1/8 pins, 7/16 in length.
7. Socket shall float a distance of $3/32 \begin{smallmatrix} + 1/32 \\ - 1/16 \end{smallmatrix}$ in all directions from the specified pin circle center location in the plane of the socket from the reference dimension.
8. In lieu of terminal markings shown (see socket-placement-voltage detail), a printed socket facsimile including terminal markings may be placed in this location at the option of the supplier.

REQUIREMENTS:

Dimensions and configuration: See figure.

Nominal voltage:	A_1 unit 3 volts	A_2 unit 15 volts
Usual number and usual type of cells:	8 AA	80 AA
Cell connection:	Series - parallel	Series - parallel

Terminals: 5-hole socket.

Weight: (maximum): 4.5 pounds.

(C) Capacity tests: When the battery is tested in accordance with the methods of examination and test of this Specification, the minimum capacity-test requirements shall be not less than the minimum time specified for SLD or SLT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:56Z
Check the source to verify that this is the current version before use.

Ⓒ Preproduction inspection:

Vibration test I.
Mechanical-shock test I.
Insulation-resistance test I.
Visual and mechanical (external and internal).
Battery voltage.
Waterproofing-of-jacket test.
Capacity, D.

Ⓒ Quality conformance inspection:

Visual and mechanical (external).
Battery voltage.
Waterproofing-of-jacket test.
Vibration test I.
Mechanical-shock test I.
Capacity, D & T.

Methods of examination and test

Capacity tests: See requirements for capacity specified herein.

Storage -	Test	Period
	D	12 months
	T	90 days

Discharge: All units shall be discharged concurrently through the resistances listed in load 1, below, for 2 minutes, and then through resistances in load 2, below, for 18 months. This cycle shall be repeated continuously to the applicable test- end voltages listed below:

	A_1 unit	A_2 unit
Resistance:		
Load 1	6.76 ohms	14.2 ohms
Load 2	open circuit	291
Test-end voltage	2.12 volts	10.0 volts

Special marking on each unit package:

TO TEST THIS BATTERY WITH TS-183( )/U:

UNIT	USE JACK NO.	MINIMUM PERMISSIBLE VOLTAGE
A_1	6	2.70
A_2	12	14.0

Unless expressly authorized, this test information shall apply to Army and Air Force applications only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:56Z
Check the source to verify that this is the current version before use.

Custodian:

Army - ER

Preparing activity:

Army - ER

Review activities:

User activities:

Army - ME
DLA - ES

Project Number: (6135-A171)

Source: https://assist.dla.mil -- Downloaded: 202610-15T16:56Z
Check the source to verify that this is the current version before use.