
MILITARY SPECIFICATION SHEET

BATTERY, DRY, BA-1264/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.


The complete requirements for procuring the dry battery described herein shall consist of this document and the latest issue of Specification MIL-B-18.

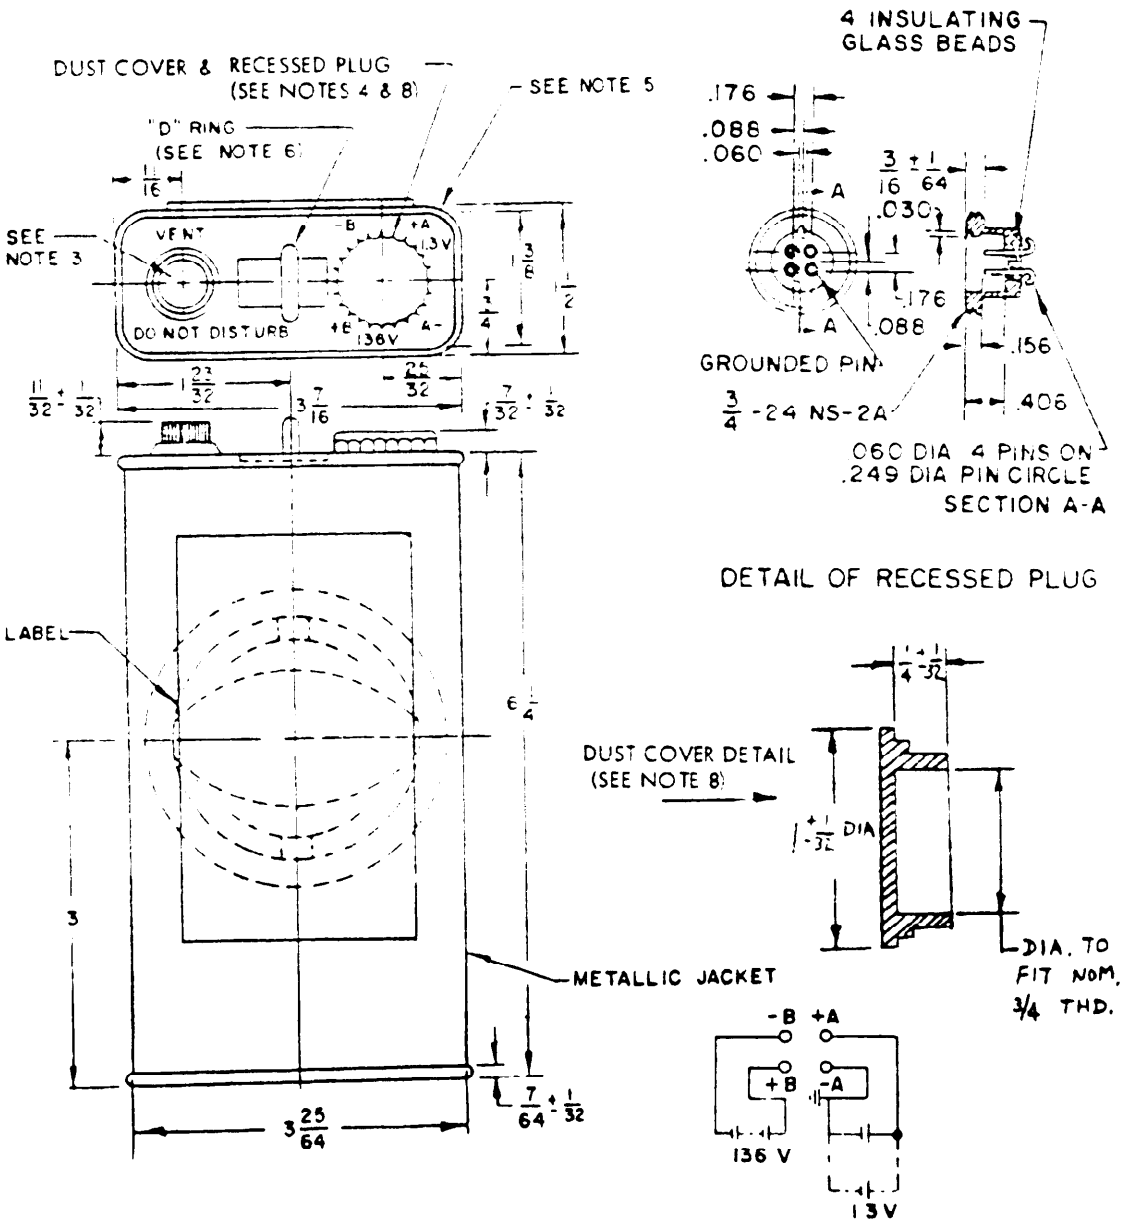

© denotes changes

Source: https://assist.dla.mil - Downloaded: 2026-10-15T16:56Z
Check the source to verify that this is the current version before use.

FSC-6135

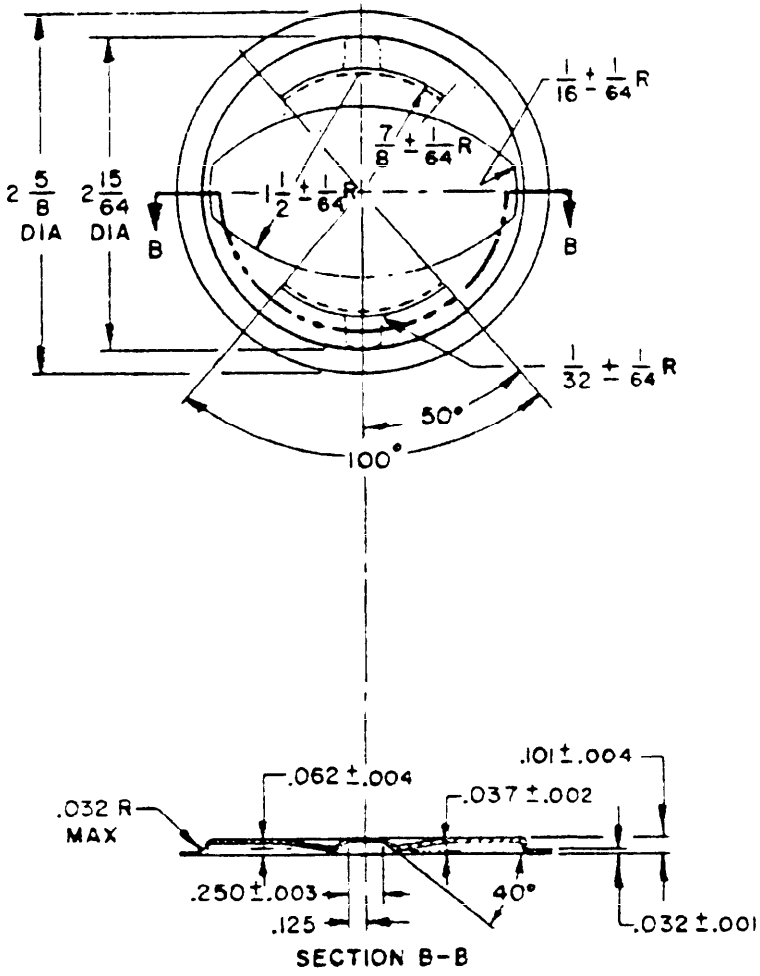

DETAIL OF CLIP

INCHES	MM
.001	.03
.002	.05
.003	.08
.004	.10
.005	.13
1/64	.40
.030	.76
1/32	.79
.032	.81
.037	.94
.060	1.52
.062	1.57
1/16	1.59
.078	1.98
.088	2.24
.101	2.57
7/64	2.78
.125	3.18
.156	3.96
1.76	4.47
3/16	4.76
7/32	5.56
.249	6.32
.250	6.35
11/32	8.73
.406	10.31
17/32	13.49
11/16	17.46
3/4	19.05
25/32	19.84
7/8	22.23
1.00	25.40
1 3/8	34.93
1 1/2	38.10
1 23/32	43.66
2 15/64	56.75
2 5/8	66.68
3 25/64	86.12
3 7/16	87.31
6 1/4	158.75

NOTES:

1. All dimensions shown on figure are in inches. Unless otherwise specified, tolerances are ± 1/16 inch on fractions, ± 0.005 inch on decimals, and ± 2° on angles.
2. Metric equivalents specified in table are for general information only and are based upon 1 inch = 25.4 millimeters.
3. The vent shall release at 18 ± 4 pounds per-square-inch gage pressure.

Source: https://assist.dla.mil -- Downloaded: 202610-15T16:56Z
Check the source to verify that this is the current version before use.

4. Solder recessed plug to jacket to exclude moisture.
5. Square, round, or diagonal corners are optional.
6. "D" ring .080 ± .005 CRS with opening of 1/2 X 5/8 min.
7. "The cells shall be made either with a poly-vinyl - cloride or dialysis or equivalent and sealed with a nylon or polyethylene grommet or equivalent."
8. Dust cover shall be according to MIL-C-5501 and NSA Standard NSA 813.

REQUIREMENTS:

Dimensions and configuration: See figure.	A unit	B unit
Nominal voltage:	1.3 volts	136 volts
Usual Number and type of cells:	4 "R-12R"	102 "R-640R"
Usual cell connection:	Parallel	Series

Terminals: Socket.

Jacket material: Metallic.

Jacket color: Color 34087 in accordance with FED-STD-595.

Weight (maximum): 3 pounds.

(C) Capacity tests: When the battery is tested in accordance with the methods of examination and test of this Specification, the minimum capacity-test requirements shall be not less than the minimum time specified for SLD or SLT.

(C) First Article inspection:

Vibration test I.
Mechanical-shock test I.
Insulation-resistance test I.
Visual and mechanical (external and internal).
Battery voltage
Voltage breakdown
Barometric pressure
Waterproofing-of-jacket test.
Capacity, D (without storage)

(C) Quality conformance inspection:

Visual and mechanical (external).
Battery voltage.
Voltage breakdown.
Barometric pressure.
Waterproofing-of-jacket test.
Vibration test I.
Mechanical-shock test I.
Capacity, D & T.

Source: https://assist.dla.mil -- Downloaded: 20261O-15T16:56Z
Check the source to verify that this is the current version before use.

Methods of examination and test:

Capacity tests: See requirements for capacity specified herein.

Storage -	Test	Period
	D	12 months
	T	90 days

Discharge - The A unit shall be discharged through 4.5 ohms for 5 minutes, then through 2.1 ohms for the next 5 minutes. The B unit shall be discharged through 10,400 ohms for 5 minutes, then through 2,980 ohms for the next 5 minutes. Both units shall be discharged simultaneously and this cycle shall be repeated continuously to a test-end voltage of 1.05 volts for the "A" unit and 85.0 volts for the "B" unit.

Closed circuit voltage - Use TS-183 ( )/U test per special marking or, with minimum permissible voltage specified for TS-183 ( )/U, use load resistance values noted below:

A unit	1,998 ohms
B unit	1,980 ohms

Special marking on each unit package:

TO TEST THIS BATTERY WITH TS-183 ( )/U:

USE JACK NO.	MINIMUM PERMISSIBLE VOLTAGE
24	1.00 102

Unless expressly authorized, this test information shall apply to Army and Air Force applications only.

Custodian:
Army - ER
Navy - SH
Air Force - 99

Preparing activity:
Army - ER

Review activities:

Project Number: (6135-0155-89)

User activities:
Army - ME
Navy - MC, YD

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:56Z
Check the source to verify that this is the current version before use.