
MILITARY SPECIFICATION SHEET

BATTERY, DRY, BA-1387/URC-10

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the dry battery described herein shall consist of this document and the latest issue of Specification MIL-B-18.

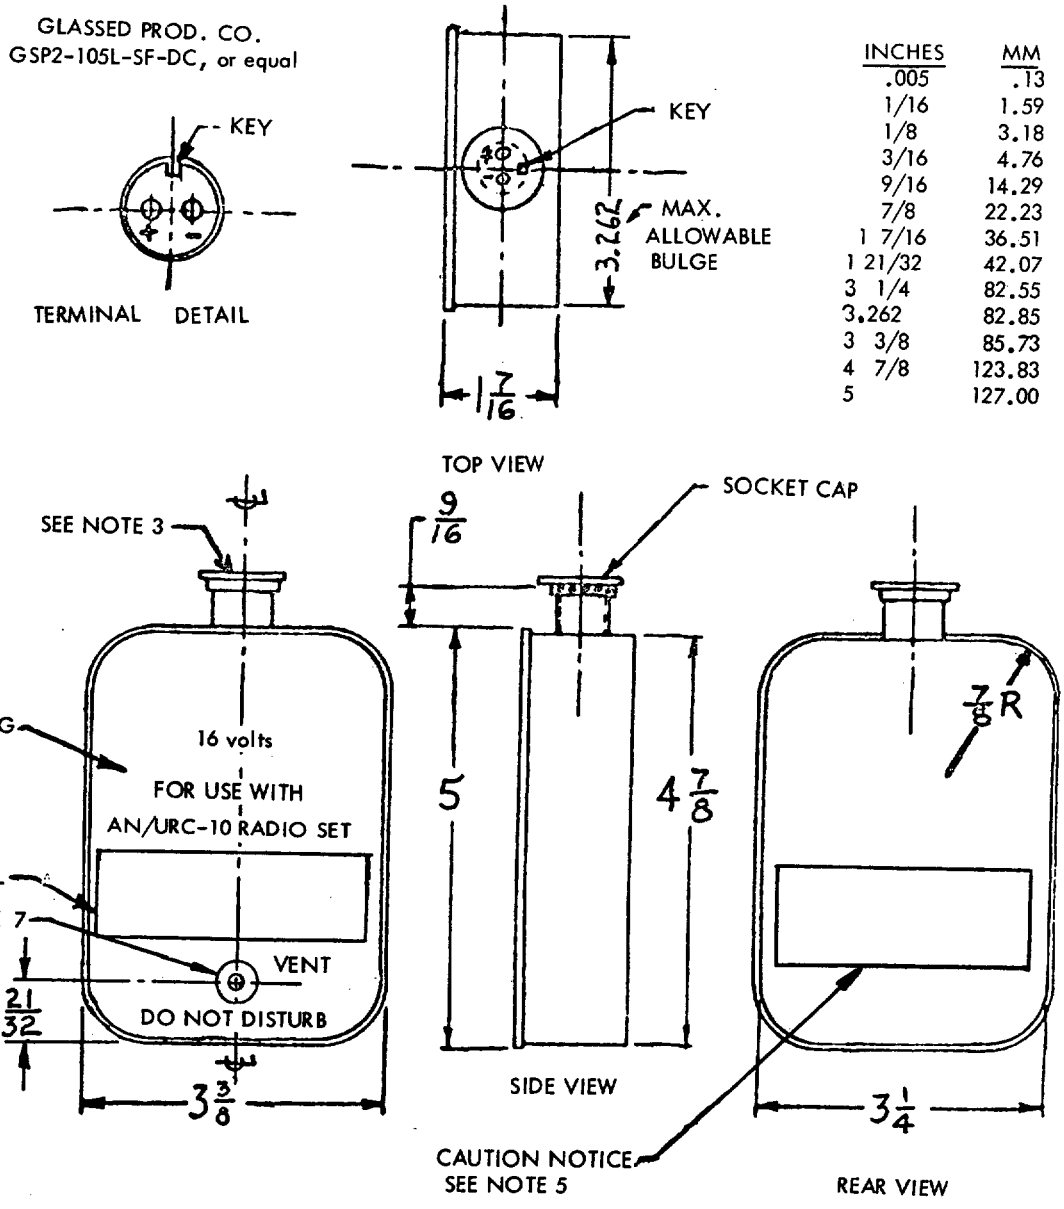

INCHES	MM
.005	.13
1/16	1.59
1/8	3.18
3/16	4.76
9/16	14.29
7/8	22.23
1 7/16	36.51
1 21/32	42.07
3 1/4	82.55
3.262	82.85
3 3/8	85.73
4 7/8	123.83
5	127.00

Ⓑ denotes changes

FSC-6135

Source: https://assist.dla.mil - Downloaded: 2026-10-15T16:56Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches. Unless otherwise specified, all tolerances are ±0.005 inch on decimals and ± 1/16 inch on fractions.
2. Metric equivalents specified in table are for general information only and are based upon 1 inch = 25.4 millimeters.
3. Battery shall be complete with rubber or plastic battery socket cap to prevent moisture from entering battery.
4. The cells shall be made with poly-vinyl-chloride barrier material, or equal, and shall be sealed with polyethylene grommet, or equal. Cells shall have wound anode type construction.
5. A caution note shall be placed on the back of the battery. All words shall be in capitals at least 1/16 inch high except the words "CAUTION NOTICE" shall be 3/16 inch high. It shall be as follows:

   "CAUTION NOTICE"

   Maintain battery between 40°F (4°C) and 125°F (52°) for 8 hours before flight, during flight and operation. Use body heat if necessary."
6. All lettering on the battery to be 1/8 inch bold lusterless black gothic except "CAUTION NOTICE" (see Note 5).
7. The vent shall release at 18± 4 pounds per-square-inch gage pressure.

REQUIREMENTS:

Dimensions and configuration: See figure.

Nominal voltage: 16 volts.

Usual number and type of cells: 12 "RM-1450R".

Usual cell connection: Series.

Terminals: 2-hole socket.

Jacket material: Metallic.

Color of jacket: Color 34087 in accordance with FED-STD-595.

Weight (maximum): 2.2 pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:56Z
Check the source to verify that this is the current version before use.

(B) Capacity tests: When the battery is tested in accordance with the methods of examination and test of this Specification, the minimum capacity-test requirements shall be not less than the minimum time specified for SLD or SLT.

(B) First Article inspection:

Visual and mechanical (External).
Battery voltage.
Vibration test.
Mechanical-shock test per MIL-STD-202, method 213, test condition I.
Insulation resistance test per MIL-STD-202, method 302, test condition.
Letter B, tolerance ± 20 volts.
Capacity, D (without storage).
Jacket integrity test.

(B) Quality conformance inspection:

Visual and mechanical (External).
Battery voltage.
Insulation-resistance test per MIL-STD-202, method 302, test condition.
Letter B, tolerance + 20 volts.
Vibration test.
Mechanical-shock test per MIL-STD-202, method 213, test condition I.
Jacket integrity test.
Electrode leakage.
Capacity, D & T.

Methods of examination and test:

Capacity tests - See requirements for capacity specified herein.

Storage	Test	Period
	D	12 months
	T	90 days

Discharge - The battery shall be discharged continuously through the resistances covered below until voltage reaches the following test-end voltage or until the applicable minimum performance period has been reached. The discharge shall consist of 5 minutes at Load 1 immediately followed by Load 2 of 5 minute duration, followed by Load 1 and so on until test-end voltage of 10.8 volts.

Load 1	200 ohms
Load 2	1,500 ohms

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:56Z
Check the source to verify that this is the current version before use.

Closed circuit voltage - Use TS-183 ( )/U test per special marking or, with minimum permissible voltage specified for TS-183 ( )/U, use a load resistance value of 99.80 ohms.

Special marking on each unit package:

*TO TEST THIS BATTERY WITH TS-183 ( )/U:

USE JACK NO.	MINIMUM PERMISSIBLE VOLTAGE
11	12.0

Unless expressly authorized, this test information shall apply to Army and Air Force applications only.

*Battery temperature shall be from 65° to 85° F when loaded voltage is performed with TS-183 ( )/U.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:

Army - ER
Navy - SH

Reviewers:

Users:

Army - ER
Mavy - YD, MC

Preparing Activity:

Army - ER

Project Number: (6135-0155-90)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:56Z
Check the source to verify that this is the current version before use.