
MIL-B-18/252A(ER)
28 May 1985
SUPERSEDING
MIL-B-18/252(EL)
26 February 1968

MILITARY SPECIFICATION SHEET

BATTERY, DRY, BA-801/PRC


This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the dry battery described herein shall consist of this document and the latest issue of Specification MIL-B-18.

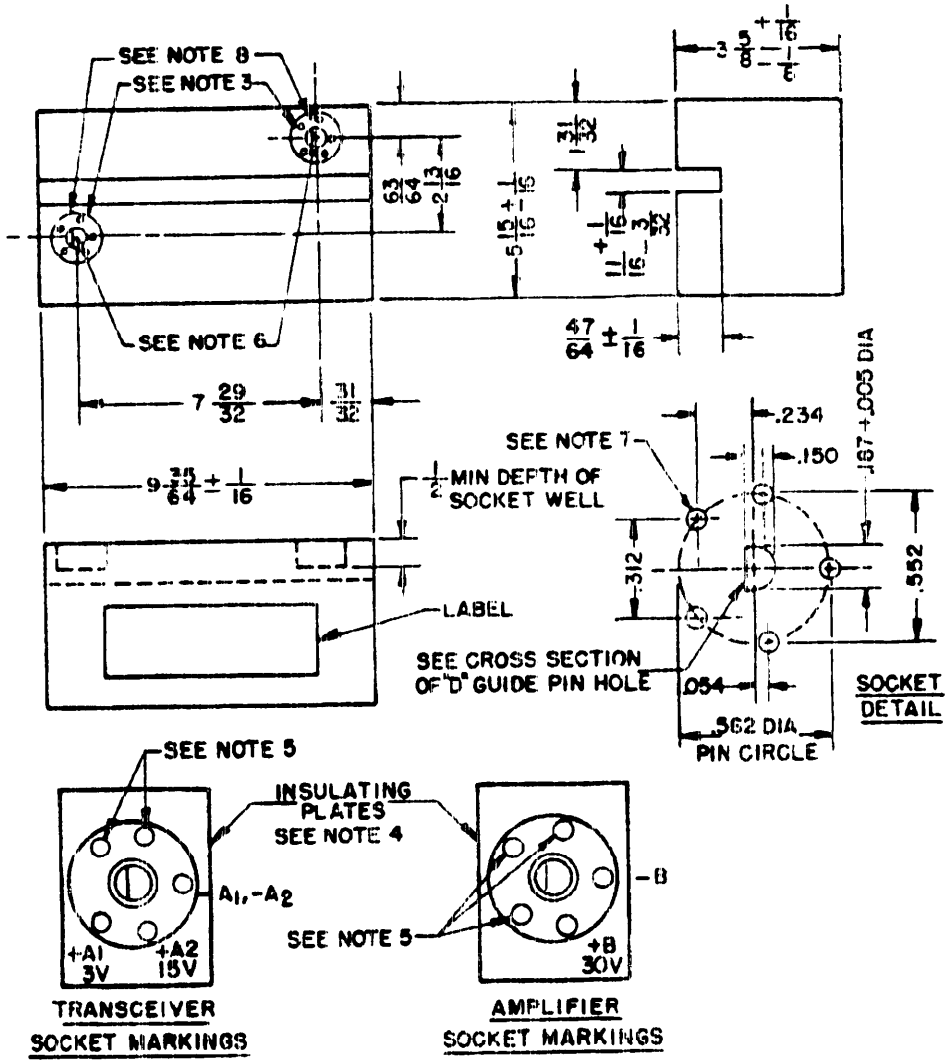


(2) denotes changes

Source: https://assist.dla.mil - Downloaded: 2026-10-15T16:57Z
Check the source to verify that this is the current version before use.

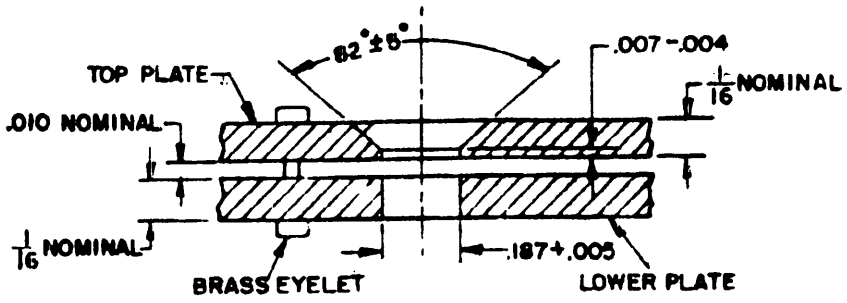

CROSS SECTION VIEW OF "D" GUIDE PIN HOLE IN SOCKET INSULATING PLATES

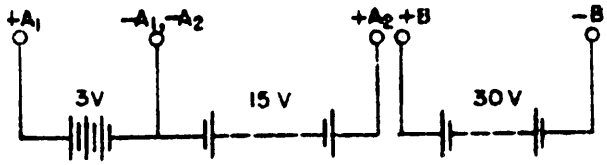

WIRING DIAGRAM

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.004	.10	1/16	1.59	7/16	11.11	31/32	24.61
.005	.13	3/32	2.38	1/2	12.70	63/64	25.00
.007	.18	1/8	3.18	.552	14.02	1 31/32	50.01
.010	.25	.150	3.81	.562	14.27	2 13/16	71.44
1/64	.40	.187	4.75	11/16	17.46	3 5/8	92.08
1/32	.79	.234	5.94	47/64	18.65	5 5/16	150.81
.054	1.37	.312	7.92	15/16	23.81	7 29/32	200.82
						9 35/64	242.49

NOTES:

1. All dimensions shown on figure are in inches. Unless otherwise specified, tolerances are ± 1/32 inch for fractions and ±0.005 for decimals.

2. Metric equivalents specified in table are for general information only and based upon 1 inch = 25.4 millimeters.

3. The socket opening in the jacket shall be 15/16 ± 1/32 inch and shall be positioned so that its center is within a 1/16 diameter circle whose center coincides with pin circle center.

Source: https://assist.dla.mil -- Downloaded: 20260-15T16:57Z
Check the source to verify that this is the current version before use.

NOTES: contd

4. The length and width of the top and bottom socket insulating plates are optional.

5. Socket insert contact not required.

6. Pin-circle center.

7. Five holes to fit 1/8 pins, 7/16 in length.

8. Both sockets shall float a distance of 3/32 ± 1/64 in all directions from the specified pin circle center location in the plane of the socket from the reference dimensions.

REQUIREMENTS:

Dimensions and configuration: See figure

	A_1 unit	A_2 unit	B unit
Nominal voltage:	3 volts	15 volts	30 volts
Usual number and type of cells:	2 "D"	40 "FL-7"	60 "FL-10"
Usual cell connection:	Series	Series-parallel	Series-parallel
Terminals:	Two (2) 5-hole sockets		
Weight (Maximum)	9 pounds, 1 oz.		

(A) Capacity tests: When the battery is tested in accordance with the methods of examination and test of this Specification, the minimum capacity-test requirements shall be not less than the minimum time specified for SLD or SLT.

(A) First Article inspection:

Visual and mechanical (External).
Battery voltage.
Vibration test.
Mechanical-shock test per MIL-STD-202, method 213, test condition I.
Insulation resistance test per MIL-STD-202, method 302, test condition Letter B, tolerance ±20 volts.
Capacity, D (without storage).
Jacket integrity test.

(A) Quality conformance inspection:

Visual and mechanical (External).
Battery voltage.
Insulation-resistance test per MIL-STD-202, method 302, test condition Letter B, tolerance ±20 volts.
Vibration test.
Mechanical-shock test per MIL-STD-202, method 213, test condition I.
Jacket integrity test.
Electrode leakage.
Capacity, D & T.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:57Z
Check the source to verify that this is the current version before use.

Methods of examination and test:

Capacity tests: See requirements for capacity specified herein.

Storage -	Test	Period
	D	12 months
	T	90 days

Discharge: All units shall be discharged concurrently through the resistances listed in load 1, below, for 2 minutes, then through resistances in load 2, below, for 18 minutes. This cycle shall be repeated continuously to the applicable test-end voltage listed below:

	A_1 unit	A_2 unit	B unit
Resistance:			
Load 1	6.76 ohms	14.2 ohms	12 ohms
Load 2	open circuit	291 ohms	open circuit
Test-end voltage	2.12 volts	10.0 volts	19.0 volts

Special marking on each unit package:

TO TEST THIS BATTERY WITH TS-183L( )/U:

UNIT	USE JACK NO	MINIMUM PERMISSIBLE VOLTAGE
A_1	6	2.70 Volts
B_2	12	14.00 Volts
B	12	28.00 Volts

Unless expressly authorized, this test information shall apply to Army and Air Force applications only

Custodian:
Army - ER

Review Activities:

User activities:
Army - ME

Preparing activity:
Army - ER

Project Number: 6135-A171-4

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:57Z
Check the source to verify that this is the current version before use.