
MILITARY SPECIFICATION SHEET

BATTERY, DRY, BA-1110/U

The complete requirements for procuring the dry batteries described herein shall consist of this document and the issue in effect of Specification MIL-B-18.

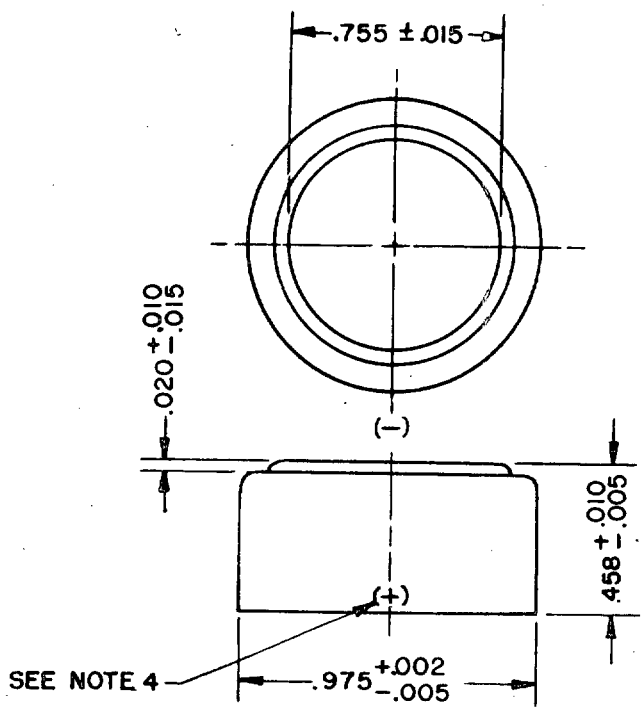

INCHES	MM
.002	.05
.005	.13
.010	.25
.015	.38
.020	.51
.458	11.63
.755	19.18
.975	24.77

NOTES:
1. All dimensions shown on figure are in inches.
2. Metric equivalents specified in table are for general information only and are based upon 1 inch = 25.4 millimeters.
3. The cell shall be made with a poly-vinyl-chloride barrier material or equal, and shall be sealed with a polyethylene seal, or equal.
4. Only the positive (+) marking is required to be shown at the bottom of the cell.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:57Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensional and configuration: See figure.

Nominal voltage: 1.3 volts.

Usual number and usual type of cells: 1 "R-3WA" cell.

Terminals: Flat surface.

Weight, (maximum): 0.8 ounces.

Capacity tests: When the battery is tested in accordance with the methods of examination and test of this Specification, the minimum capacity-test requirements shall be as specified.

SLD	24 Hours	SLT	24 Hours	1/ MLT	20 Hours

Preproduction inspection: 2/

Visual and mechanical (external and internal).
Battery voltage.
Electrolyte leakage.
Capacity, D and MLT 1/.

Quality conformance inspection:

Visual and mechanical (external).
Battery voltage.
Electrolyte leakage.
Capacity, D and T.

Methods of examination and tests:

Capacity tests: See requirements for capacity specified herein.

Storage -

Test	Period
D	12 months
T	90 days
MLT	1/

Discharge - The battery shall be discharged through 37 ohms continuously to a test-end voltage of 0.9 volts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:57Z
Check the source to verify that this is the current version before use.

Electrolyte leakage - The battery shall be discharged through 25 ohms for 24 hours.

Notes:

1/ Moderate low temperature (MLT) test shall be performed at 40° ± 3° F. on the ten (10) Group I preproduction samples. The MLT samples shall be stored under normal conditions of 40° ± 5° F. for a minimum of ten (10) hours prior to discharge. Extreme conditions consisting of 40° ± 10° F., will be allowed provided that they do not exist for more than 5% (cumulative) of the specified storage and discharge periods.
2/ Twenty-five (25) samples in lieu of fifteen (15) samples shall be subjected to Group I preproduction inspection.

Special marking on each unit package:

TO TEST THIS BATTERY WITH TS-183( )/U:

USE JACK NO.	MINIMUM PERMISSIBLE VOLTAGE
4	1.00 Volt

Unless expressly authorized, this test information shall apply to Army and Air Force applications only.

Custodian:
ARMY-EL

Review activities:
ARMY-EL

User activities:
ARMY-ME

Preparing activity:
Army - EL

(Project 6135-A079)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:57Z
Check the source to verify that this is the current version before use.