
MILITARY SPECIFICATION SHEET

BATTERY, DRY, BA-1509/PRC-64

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the dry battery described herein shall consist of this document and the latest issue of Specification MIL-B-18.

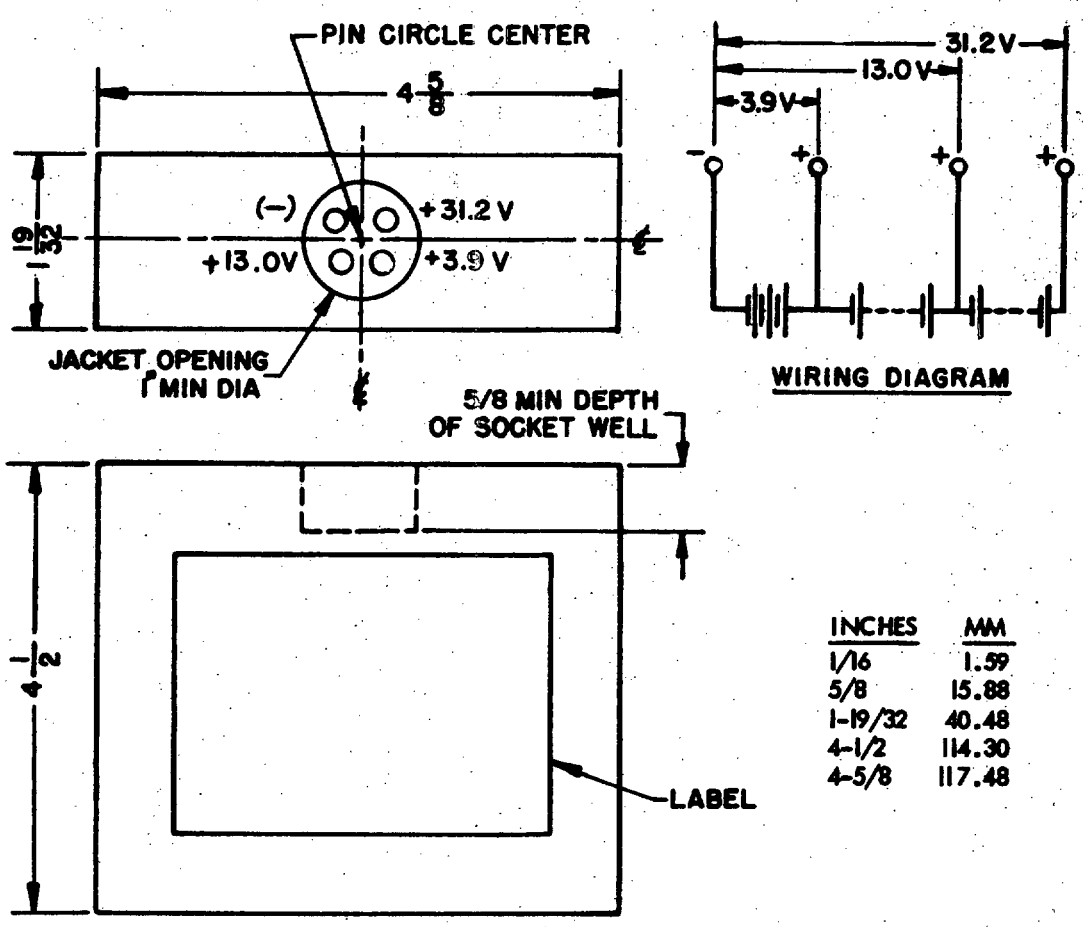

INCHES	MM
1/16	1.59
5/8	15.88
1-19/32	40.48
4-1/2	114.30
4-5/8	117.48

Ⓐ denotes changes

Source: https://assist.dla.mil - Downloaded: 2025-10-15T16:57Z
Check the source to verify that this is the current version before use.

FSC 6135

NOTES:

1. All dimensions shown on figure are in inches, with tolerance of ±1/16 inch.
2. Metric equivalents specified in table are for general information only and are based upon 1 inch = 25.4 millimeters.
3. The cells shall be made with a poly-vinyl-chloride barrier material, or equal, and shall be sealed with a polyethylene seal, or equal.
4. Socket type XIII. (See general specification for details.)

REQUIREMENTS:

Dimensions and configuration: See figure.

Nominal voltage: 31.2 volts.

Tapped at: 3.9 volts
Tapped at: 13.0 volts

Usual number and type of cells: 24 "R-1438R" cells.

Usual cell connection: Series.

Terminals: 4 hole socket

Weight (Maximum): 2.8 pounds.

(A) Capacity tests: When the battery is tested in accordance with the methods of examination and test of this Specification, the minimum capacity-test requirements shall be not less than the minimum time specified for SLD or SLT.

(A) First Article inspection:

Visual and mechanical (External).
Battery voltage.
Vibration test.
Mechanical-shock test per MIL-STD-202, method 213, test condition I.
Insulation resistance test per MIL-STD-202, method 302, test condition Letter B, tolerance ±20 volts.
Capacity, D (without storage).
Jacket integrity test.

(A) Quality conformance inspection:

Visual and mechanical (External).
Battery voltage.
Insulation-resistance test per MIL-STD-202, method 302, test condition Letter B, tolerance ±20 volts.
Vibration test.
Mechanical-shock test per MIL-STD-202, method 213, test condition I.
Jacket integrity test.
Electrode leakage.
Capacity, D & T.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:57Z
Check the source to verify that this is the current version before use.

Methods of examination and test:

Capacity tests: See requirements for capacity specified herein.

Storage -	Test	Period
	D	12 months
	T	90 days

Discharge - The battery shall be discharged through 288 ohms continuously to a test-end voltage of 21.6 volts.

Closed circuit voltage -

Special marking on each unit package:

TO TEST THIS BATTERY WITH TS-183 ( )/U:

USE JACK NO.	MINIMUM PERMISSIBLE VOLTAGE
12	24.0

Unless expressly authorized, this test information shall apply to Army and Air Force applications only.

Custodian:
Army - ER

Preparing activity:
Army - ER

Review activities:

Project Number: (6135-A171-6)

User activities:
Army - ME

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:57Z
Check the source to verify that this is the current version before use.