INCH-POUND

MIL-B-18/260A(ER)
31 March 1992
SUPERSEDING
MIL-B-18/260(ER)
7 October 1968

MILITARY SPECIFICATION SHEET

BATTERY, NON-RECHARGEABLE, BA-1391/U

This specification sheet is approved for use by the Laboratory Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODSIS) specified in the solicitation: MIL-B-18.

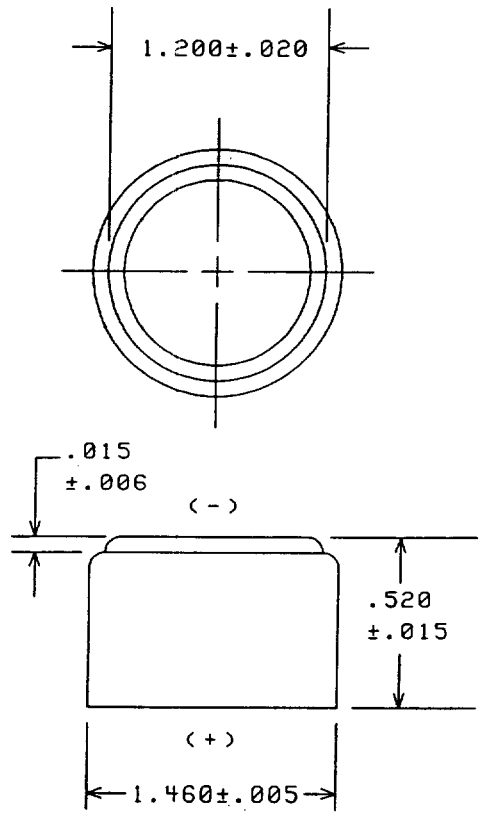


FIGURE 1. DIMENSIONS AND CONFIGURATION.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:58Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches.

2. The cells shall be made with polyethylene separator material or equal and shall be sealed with a polyphenylene sulfide seal or equal.

3. Only the positive (+) marking is required to be shown at the bottom of the cell.

REQUIREMENTS:

Dimensions and configuration: See Figure 1.

Nominal voltage: 1.3 volts.

Usual number and usual type of cells: 2 A401P cells.

Terminals: Flat surface.

Weight (maximum): 2 ounces.

Capacity tests: When the battery is tested in accordance with the methods of examination and test of this specification, the minimum capacity test requirements shall be as specified.

SLD - 24 hours.

SLT - 24 hours

MLT - 18 hours.

First article inspection: 2/

Visual and mechanical (external and internal).
Battery voltage.
Electrolyte leakage.
Capacity, D and MLT 1/.

Quality conformance inspection:

Visual and mechanical (external).
Battery voltage.
Electrolyte leakage.
Capacity, D and T.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:58Z
Check the source to verify that this is the current version before use.

Methods of examination and tests:

Capacity tests - See requirements for capacity specified herein.

Storage -	Test	Period
	D	12 months
	T	90 days
	MLT	1/

Discharge - The battery shall be discharged through 12.0 ohms continuously t a test-end voltage of 0.9 volt.

Electrolyte leakage - The cell shall be discharged through 8.0±0.6 ohms for 48 hours.

Special marking on each unit package:

TO TEST THIS BATTERY WITH TS-183 ( )/U:

USE JACK NO.	MINIMUM PERMISSILBE VOLTAGE
3	1.00 VOLT

Unless expressly authorized, this test information shall apply to Army and Air Force applications only.

NOTES:

1/ Moderate low temperture (MLT) test shall be performed at 40±3°F on the ten (10) group 1 first article samples. The MLT samples shall be stored at 40±5°F for a minimum of ten (10) hours prior to discharge. Extreme conditions consisting of 40±10°F shall be allowed provided that it does not exist for more than 5% (cumulative) of the specified storage and discharge periods.

2/ Twenty five (25) samples in lieu of fifteen (15) samples shall be subjected to Group 1 of first article inspection.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodian:
Army-ER

Preparing activity:
Army-ER

(Project 6135-A246)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:58Z
Check the source to verify that this is the current version before use.