

MILITARY SPECIFICATION
BATTERY, DRY, BA-1010/U

The complete requirements for procuring the dry batteries described herein shall consist of this document and the issue in effect of Specification MIL-B-16.

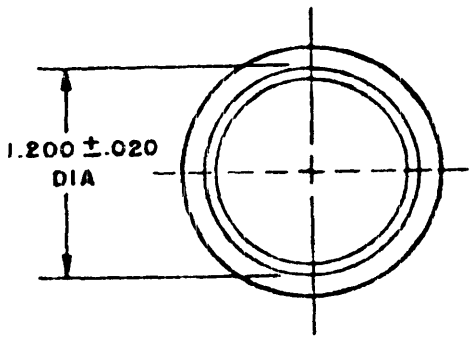

INCHES	MM
.005	.13
.006	.15
.010	.25
.015	.38
.020	.51
.395	10.03
1.200	30.48
1.458	37.03

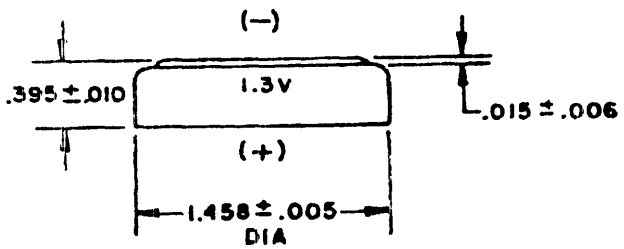

NOTES:

1. All dimensions shown on figure are in inches.
2. Metric equivalents specified in table for general information only and are based upon 1 inch = 25.4 millimeters.
3. The cell shall be made with a poly-vinyl-chloride barrier material or equal, and shall be sealed with a polyethylene seal or equal.
4. Only the positive (+) marking is required to be shown at the bottom of the cell.

FSC 6135

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:58Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure.

Nominal voltage: 1.3 volts.

Usual number and usual type of cells: 1 "R-1438R"

Terminals: Flat surface.

Weight, (maximum): 1.40 ounces.

Capacity tests: When the battery is tested in accordance with the methods of examination and test of this Specification, the minimum capacity-test requirements shall be as specified.

SLD	20 Hours	SLT	20 Hours	1/ MLT	16 Hours

Preproduction inspection: 2/

Visual and mechanical (external and internal).
Battery voltage.
Electrolyte leakage.
Capacity, D and MLT 1/

Quality conformance inspection:

Visual and mechanical (external).
Battery voltage.
Electrolyte leakage.
Capacity, D and T.

Methods of examination and tests:

Capacity tests: See requirements for capacity specified herein.

Storage -

Test	Period
D	12 months
T	90 days
MLT	1/

Discharge - The battery shall be discharged through 12.0 ohms continuously to a test-end voltage of 0.9 volt.

Source: https://assist.dla.mil -- Downloaded: 202610-15T16:58Z
Check the source to verify that this is the current version before use.

Electrolyte leakage - The cell shall be discharged through 12.0 ohms for 48 hours.

Special marking on each unit package:

TO TEST THIS BATTERY WITH TS-183( )/U:

USE JACK NO.	MINIMUM PERMISSIBLE VOLTAGE
3	1.00 Volt

Unless expressly authorized, this test information shall apply to Army and Air Force applications only.

NOTES:

1/ Moderate low temperature (MLT) test shall be performed at 40° ± 3°F. on the ten (10) Group I preproduction samples. The MLT samples shall be stored at 40° ± 5°F., for a minimum of ten (10) hours prior to discharge. Extreme conditions consisting of 40° ± 10°F., will be allowed provided that they do not exist for more than 5% (cumulative) of the specified storage and discharge periods.

2/ Twenty-five (25) samples in lieu of fifteen (15) samples shall be subjected to Group I preproduction inspection.

Custodians:
Army-EL

User activities:
AV, ME

Preparing activity:

ARMY - EL

(Project 6135-A095)

Source: https://assist.dla.mil -- Downloaded: 202610-15T16:58Z
Check the source to verify that this is the currentversion before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:58Z
Check the source to verify that this is the current version before use.

To detach this form, cut along this line

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION
MIL-B-18/264(EL) BATTERY, DRY, BA-1010/U

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?
   ☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 58 WHICH MAY BE USED.

ESC-PM 1068-68

Source: https://assist.dla.mil -- Downloaded: 202610-15T16:58Z
Check the source to verify that this is the current version before use.

FOLD

Department of the Army
Headquarters
U.S.Army Electronics Command
Fort Monmouth, New Jersey 07703

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding General
U.S.Army Electronics Command
ATTN: AMSEL- TD-SS
Fort Monmouth, New Jersey 07703

To detach this form, cut along this line

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T16:58Z
Check the source to verify that this is the current version before use.