INCH-POUND

MIL-DTL-52618/7E
26 January 2012
SUPERSEDING
MIL-DTL-52618/7D
25 November 2002

DETAIL SPECIFICATION SHEET

FITTINGS, PIPE, ALUMINUM-ALLOY THREADED, 150-POUND, SQUARE HEAD AND SQUARE SOCKET PLUGS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-52618.



A – SOLID PATTERN
SIZES 1/8" – 3 1/2" INCLUSIVE



B – CORED PATTERN
SIZES 1/8" – 3-1/2" INCLUSIVE

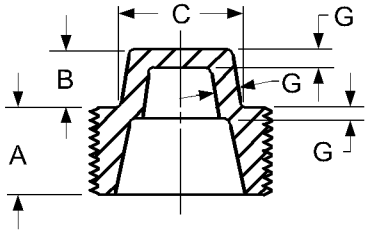

C – CORED PATTERN
SIZES 1/8" – 3-1/2" INCLUSIVE



D – COUNTER-SUNK PATTERN
SIZES 1/8" – 4" INCLUSIVE

FIGURE 1. Square head and square socket plugs (not to scale).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:27Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

The fittings shall be as specified on figure 1.

The design, dimensions, and tolerances of couplings and street elbows shall be in accordance with ASME B16.14.

Intended use is with water, oil, or air 150 psi max. at 72°F.

Aluminum shall be in accordance with MIL-DTL-52618.

Configuration designators shall be in accordance with table I.

TABLE I. Configuration code letter for fittings.

Configuration code	Description
P	Solid pattern
Q	Cored pattern
R	Hollow cored pattern
S	Countersunk pattern

Size code numbers shall be in accordance with table II.

TABLE II. Size code numbers for fittings.

Size code numbers	Nominal pipe size (inch)
01	1/8
02	1/4
03	3/8
04	1/2
05	3/4
06	1
07	1 - 1/4
08	1 - 1/2
09	2
10	2 - 1/2
11	3
12	3 - 1/2
13	4

Pipe threads shall be in accordance with MIL-DTL-52618.

Pipe thread direction code shall be in accordance with table III.

TABLE III. Thread direction code letter.

Thread direction code letter	Thread direction
X	Right-hand
Y	Left-hand
Z	Right- and left-hand

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:27Z
Check the source to verify that this is the current version before use.

Finish shall be in accordance with MIL-DTL-52618.

Finish code letter shall be in accordance with table IV.

TABLE IV. Finish code letter.

Finish code letter	Finish
A	As cast
B	As extruded
C	Anodized

Part or Identifying Number (PIN). The PIN consists of the letter M, specification sheet number, a dash, configuration code letter, size code number, thread direction code letter and finish code. PIN's are assigned as follows:

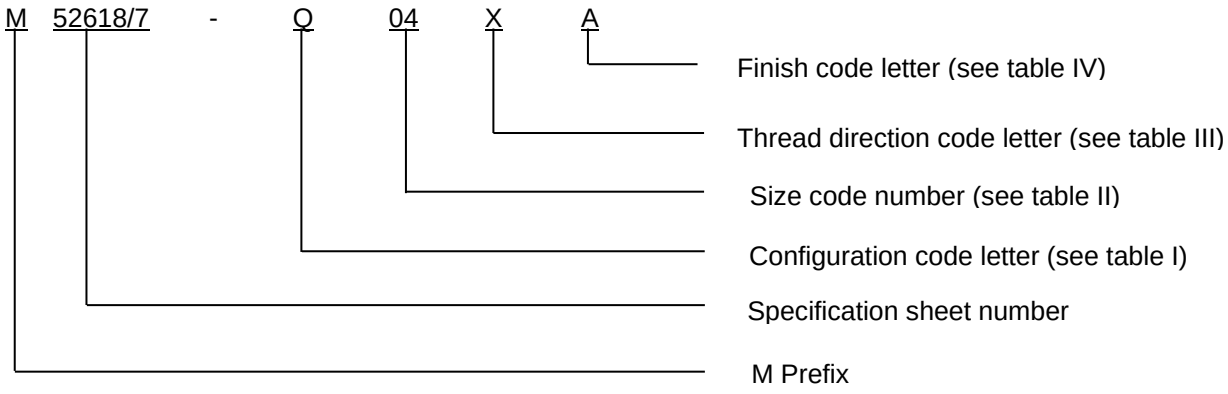

PIN example: M52618/7-Q04XA indicates a cored pattern plug for a 1/2 inch pipe, right hand threads, and finish is "as cast".

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-52618, this document references ASME B16.14.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:27Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - AT
Navy - AS
DLA - CC

Preparing activity:
DLA - CC

Review activities:
Army - CE
Navy - MC, SA

(Project 4730-2012-016)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:27Z
Check the source to verify that this is the current version before use.