NOT MEASUREMENT SENSITIVE


MIL-DTL-3628/134C
19 August 2022
SUPERSEDING
MIL-DTL-3628/134B
17 June 2019

DETAIL SPECIFICATION SHEET

BADGE, IDENTIFICATION, COMMANDANT'S STAFF, U.S. COAST GUARD

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

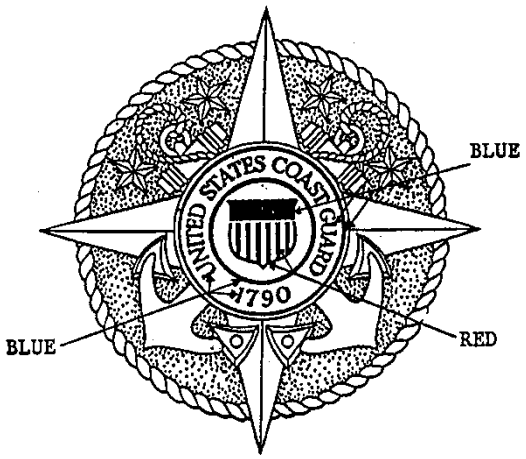

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL:
BASE: (-1 and -2) Red Brass 85/15 (UNS Alloy No. C-230)
DEVICE: (-1 and -2) Red Brass 85/15 (UNS Alloy No. C-230)

FINISH
BASE: (-1 and -2) 24K Gold Plated, Matte Finish, Polish Highlights and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 8.
DEVICE: (-1 and -2) Epoxy resin (Stoning epoxy) Nickel Plate Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:44Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
WIDTH (Point to point):
BASE:
-1: 2-1/4 inches (REF)
-2: 1-1/2 inches (REF)
DEVICE:
-1: 7/8 inch (REF)
-2: 9/16 inch (REF)
THICKNESS (Rope edge):
BASE:
-1: 0.085 inch ± 0.010 inch
-2: 0.070 inch ± 0.010 inch
DEVICE:
-1: 0.060 inch ± 0.010 inch
-2: 0.050 inch ± 0.010 inch
OVERALL THICKNESS (At thickest point)
-1: 0.150 inch ± 0.010 inch
-2: 0.120 inch ± 0.010 inch

ATTACHING DEVICE:

1. The attaching device shall be prong and wing type clutch.

2. Three prongs shall be located on a 1-3/4 inch ± 1/64 inch diameter circle for -1 and 1-1/8 inch ± 1/64 inch diameter circle for -2.

3. Each prong shall be spaced 120 degrees apart with the top prong located on the vertical center line at the top of the badge.

4. The device shall be superimposed and secured to the base by rivets or soft solder as shown. When hard enamel is used on the device, the device shall be soft soldered or riveted to the center platform of the base. When epoxy resin is used on the device, the device shall be attached by using rivets. Two rivets shall be soldered or electronically fused on the vertical center line and 5/16 inch ± 1/64 inch on centers for -1 and one rivet shall be soldered or electronically fused in the center of the device for -2.

EPOXY: Epoxy resin shall be applied to the Badge Qualification as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below.

TIOH HARD ENAMEL COLOR CHIPS	
COLOR	**CHIP NUMBER**
RED	#1
BLUE	#18

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:44Z
Check the source to verify that this is the current version before use.

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. If hard enamel is used then the material for the device will be Gilding Metal 95/5 (UNS Alloy C-210)

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Navy - CG1

Preparing activity:
Navy - CG1

Review activity:
DLA - CT

(Project No. 8455-2022-173)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:44Z
Check the source to verify that this is the current version before use.