NOT MEASUREMENT SENSITIVE


MIL-DTL-3628/136D
15 July 2021
SUPERSEDING
MIL-DTL-3628/136C
13 September 2016

DETAIL SPECIFICATION SHEET

BADGE, IDENTIFICATION, U. S. STRATEGIC COMMAND

This specification is approved for use by all
Departments and Agencies of the Department of Defense


The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.




BASE




DISK WITH LETTERS



CENTER INSERT
(with stars, land & orbits)



DEVICE (Gauntlet)

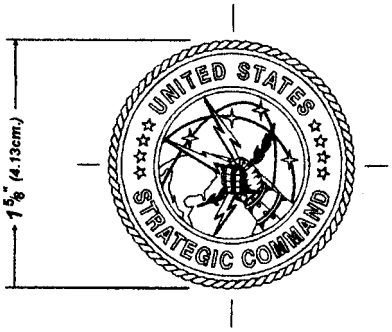

ASSEMBLED

MATERIAL:
BASE:
Red Brass 85/15 (UNS Alloy No. C-230) base with rope design, center insert (disc with stars, land mass, orbits), and gauntlet device
DISC
Gilding Metal 95/5 (UNS Alloy No. C-210) disc with lettering

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:44Z
Check the source to verify that this is the current version before use.

FINISH:
BASE AND ROPE: Gold Plated, Mirror-like Polished, and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 6
DISK WITH LETTERING: Hard Enameled or Epoxied, Nickel Plated, Gold Plated, Mirror-like Polished, and shall match TIOH Metal Finish Chip Number 6 except for STARS which shall be Nickel Plated, Mirror-like Polished, and match TIOH Metal Finish Chip Number 16
CENTER INSERT (disc with stars, land mass, orbits): Nickel Plated, Silver Plated, Oxidized, Buffed Relieved, and shall match TIOH Metal Finish Chip Number 14.
GAUNTLET DEVICE: Nickel Plated, Mirror-like Polished, and shall match TIOH Metal Finish Chip Number 16.

DIMENSIONS:
BASE AND ROPE:
BASE PLATE (without rope):
DIAMETER: 1-5/8 inches REF
THICKNESS: 0.040 inch ± 0.005 inch
ROPE, UNASSEMBLED (without base plate thickness):
THICKNESS: 0.080 inch ± 0.005 inch
DISC WITH LETTERING:
DIAMETER: Outside - 1-1/2 inch (REF)
Recessed Center - 15/16 inch (REF)
THICKNESS: Outer Circle - 0.085 inch ± 0.005 inch
Recessed Center - 0.050 inch ± 0.005 inch
CENTER INSERT:
DIAMETER: 15/16 inch (REF)
THICKNESS (at thickest point): 0.065 ± 0.005 inch
GAUNTLET DEVICE:
HEIGHT (overall): 7/8 inch (REF)
WIDTH (overall): 3/4 inch (REF)
THICKNESS (at thickest point): 0.060 ± 0.005 inch

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The rope shall be fabricated from three pieces of brass wire 0.035 inch + 0.005 inch - 0, twisted approximately 14 turns per inch. The rope shall be hard soldered to the base as shown.

3. Enameled/epoxied areas shall be as shown. Epoxy resin (stoning epoxy) may be at the option of the manufacturer. When hard enamel is used, the material requirement shall be gilding metal. When epoxy is used, the material requirement shall be either red brass or gilding material. The area surrounding the gold lettering and nickel-plated stars shall be filled with blue hard enamel or epoxy conforming to TIOH Hard Enamel Color Chip Number 20

4. The base plate with rope, disc with lettering, center insert, and gauntlet device shall be assembled as shown:

- The gauntlet shall have a screw post made from any type brass attached to the reverse side. The back screw plate shall be made from any type 1/4 inch hard brass. The

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:44Z
Check the source to verify that this is the current version before use.

screw post shall be 3/16 inch ± 1/64 inch long and shall be hard soldered or fused to the reverse of the gauntlet device. The screw post shall be located to correctly position the device atop the center insert with the screw post protruding through the insert, the disc with lettering, and the base plate.

- The base plate and disc with lettering shall have a 1/8 inch ± 1/64 inch hole as shown through each piece. The four pieces comprising the badge shall be secured by a Type A back plate without the post as shown on TIOH Drawing 4-4-89.

- When fully assembled, the top lightning bolt of the gauntlet device shall be pointing to the letter "T" in the word "UNITED."

5. The center insert with stars, land mass, and orbits shall be lacquered prior to assembly.

6. Attaching device shall be prong and flat ball clutch type. Three prongs shall be located on a 1-1/4 inch ± 1/64 inch diameter circle. Each prong shall be spaced 120° apart with the bottom prong located on the vertical center line at the bottom of the badge. Prong length shall be 9/32 inch ± 1/64 inch.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH
Navy - MC
Air Force – 11

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2021-585)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:44Z
Check the source to verify that this is the current version before use.