NOT MEASUREMENT SENSITIVE

MIL-DTL-3628/137
15 November 1996
SUPERSEDING
MIL-B-41809/42B
21 September 1994

DETAIL SPECIFICATION SHEET

BADGE, IDENTIFICATION, POLICE, DEFENSE PROTECTIVE SERVICE, DEPARTMENT OF DEFENSE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3628 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

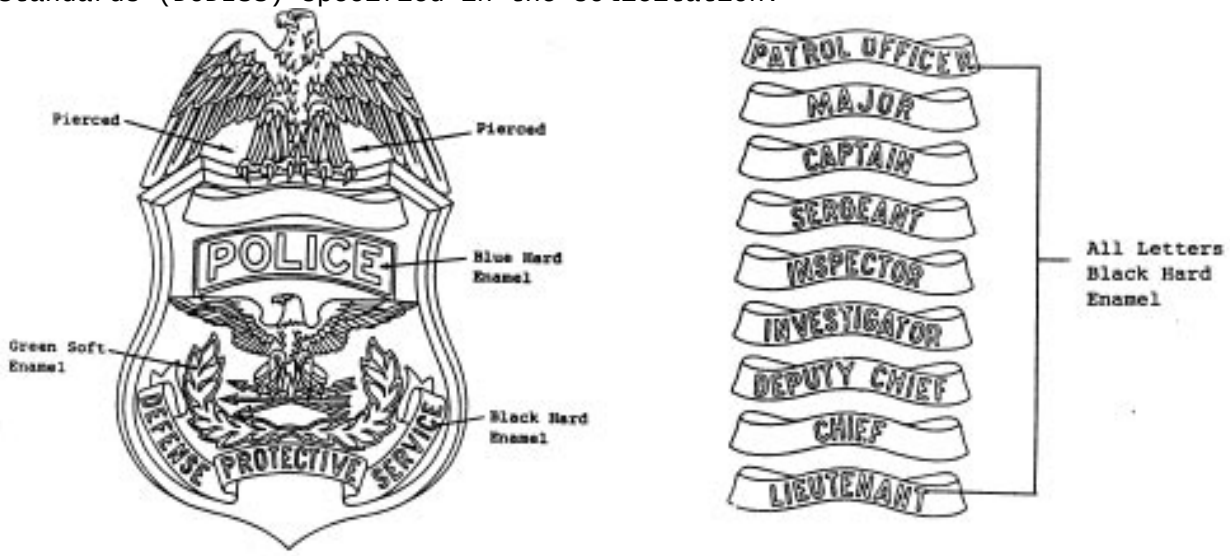

MATERIAL: Gilding Metal

DIMENSIONS:
HEIGHT (Overall): 3-1/2 inches (8.89 cm) (REF)
WIDTH (Overall): 2-1/4 inches (5.72 cm) (REF)
THICKNESS (At "POLICE" Lettering): 0.085 inch ± 0.010 inch (0.215 cm ± 0.025 cm)

FINISH: Hard Enameled, Soft Baked Enameled, Gold Plated, Matte Finish, Highlights Polished and shall match TIOH Metal Finish Chip Number 8.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:45Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. A full forcer shall be used to bring up the details of the design.

3. Piercing shall be as indicated.

4. The badge shall be dapped to a radius of 3-3/8 inch ± 1/4 inch (8.57 cm ± 0.64 cm) along the horizontal plane.

5. The attaching device shall be a coil pin type with heavy duty side opening catch. The pin stem shall be 2 inches ± 1/64 inch (5.08 cm ± 0.16 cm) long. The pin and catch shall be hard soldered or fused on the vertical center line with the joint located 3/4 inch ± 1/64 inch (1.91 cm ± 0.04 cm) down from the top of the badge. The joint and catch shall be positioned on the same level plane to each other (platform areas on the reverse side may be used for leveling the joint and catch).

6. Enamel color shall be as indicated. The enamel color shall conform to the TIOH chip numbers listed below or the standard sample.

COLOR	CHIP NUMBER
Green	12
Black	26
Blue	33

7. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel and soft baked enamel at the option of the manufacturer. When epoxy resin is used in lieu of soft baked enamel, the epoxy resin shall not be stoned.

8. Scroll lettering shall be as specified in the procurement document and may be cut into the working die or the badge. Letters shall be 1/8 inch (0.32 cm) in height, block style and filled with black enamel. The color shall conform to TIOH Chip No. 26.

9. The badge shall be numbered consecutively with the numbers specified in the procurement document. Numbers shall be 1/8 inch (0.32 cm) high, equally spaced above the vertical center line and aligned in an arc within the unembossed area provided on the lower obverse side. Numbers shall be filled with black soft baked enamel. The color shall conform to TIOH Chip No. 26.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Air Force - 45
Navy - NU

Review activities:
Air Force - 32, 82, 99
Navy - MC
Coast Guard - CG
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0866)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:45Z
Check the source to verify that this is the current version before use.