INCH-POUND

MIL-DTL-3628/137A
21 September 2000
SUPERSEDING
MIL-DTL-3628/137
15 November 1996

DETAIL SPECIFICATION SHEET

BADGE, IDENTIFICATION, POLICE, DEFENSE PROTECTIVE SERVICE, OFFICE OF THE SECRETARY OF DEFENSE

Inactive for new design after 13 January 1999.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3628 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

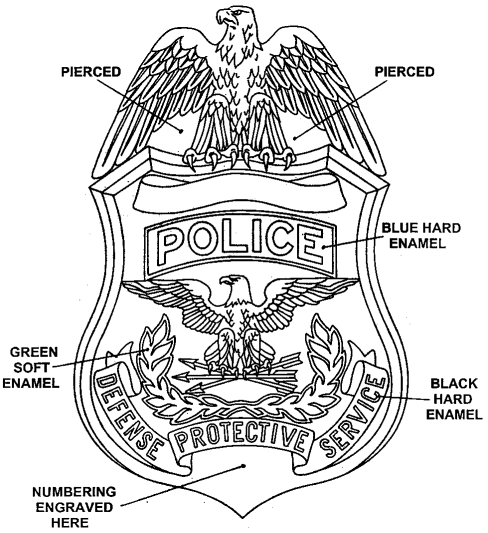

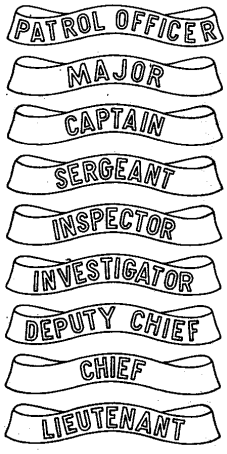

LETTERS
BLACK SOFT ENAMEL

MATERIAL: Gilding Metal

FINISH: Hard Enameled, Soft Baked Enameled, Gold Plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 6.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:45Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

HEIGHT (overall): 3-1/2 inches (REF)
WIDTH (overall): 2-1/4 inches (REF)
THICKNESS (at "POLICE" lettering): 0.085 inch ± 0.010 inch

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die. TIOH Drawing Numbers B-16-9 and B-16-9A may be used as additional reference.

2. A full forcer shall be used to bring up the details of the design.

3. Piercing shall be as indicated.

4. The badge shall be dapped to a radius of 3-3/8 inch ± 1/4 inch along the horizontal plane.

5. Epoxy resin (stoning epoxy) may be used in lieu of both hard enamel and soft baked enamel at the option of the manufacturer. When epoxy resin is used in lieu of soft baked enamel, the epoxy resin shall not be stoned. Enamel and epoxy colors shall conform to TIOH Hard Enamel Chip Numbers listed below:

COLOR	CHIP NUMBER
Green	12
Black	26
Blue	33

6. Scroll lettering shall be as specified in the procurement document and may be cut into the working die or the badge. Letters shall be 1/8 inch in height, block style, and filled with black soft baked enamel or unstoned epoxy.

7. The attaching device shall be a coil pin type with heavy-duty side opening catch. The pin stem shall be 2 inches ± 1/64 inch long. The pin and catch shall be hard soldered or fused on the vertical center line with the joint located 3/4 inch ± 1/64 inch down from the top of the badge. The joint and catch shall be positioned on the same level plane to each other. (Platform areas on the reverse side may be used for leveling the joint and catch.)

8. Each badge shall be numbered consecutively with the number specified in the procurement document. Numbers shall be 1/8 inch high, engraved, equally spaced, and aligned in an arc within the unembossed area provided on the lower obverse side. Numbers shall be filled with black soft baked enamel or unstoned epoxy.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:45Z
Check the source to verify that this is the current version before use.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-0027)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:45Z
Check the source to verify that this is the current version before use.