NOT MEASUREMENT SENSITIVE


MIL-DTL-3628/137D(IH)
21 March 2024
SUPERSEDING
MIL-DTL-3628/137C(IH)
20 May 2019

DETAIL SPECIFICATION SHEET

BADGE, IDENTIFICATION, POLICE, DEFENSE PROTECTIVE SERVICE, OFFICE OF THE SECRETARY OF DEFENSE

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3628.

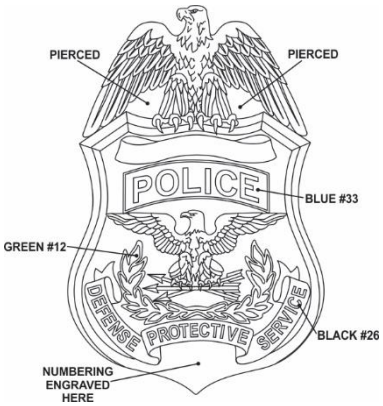



MATERIAL: Red Brass 85/15 (UNS Alloy C-230)

FINISH: Epoxy resin (Stoning epoxy), Gold Plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Standard Metal Finish Chip Number 6.

DIMENSIONS:
HEIGHT (overall): 3-1/2 inches (REF)
WIDTH (overall): 2-1/4 inches (REF)
THICKNESS (at "POLICE" lettering): 0.085 inch ± 0.010 inch

ATTCHING DEVICE:
1. The attaching device shall be a coil pin type with heavy-duty side opening catch.

2. The pin stem shall be 2 inches ± 1/64 inch long.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:45Z
Check the source to verify that this is the current version before use.

3. The pin and catch shall be hard soldered or fused on the vertical center line with the joint located 3/4 inch ± 1/64 inch down from the top of the badge.

4. The joint and catch shall be positioned on the same level plane to each other. (Platform areas on the reverse side may be used for leveling the joint and catch.)

EPOXY: Epoxy resin shall not be stoned. Both hard enamel and soft baked enamel may be used at the option of the manufacturer in lieu of epoxy resin. If hard enamel and soft baked enamel are used then the material will be Gilding Metal 95/5 (UNS Alloy C-210). Epoxy and enamel colors shall conform to TIOH Hard Enamel Chip Numbers listed below:

COLOR	CHIP NUMBER
Green	12
Black	26
Blue	33

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die. TIOH Drawing Numbers B-16-9 and B-16-9A may be used as additional reference.

2. A full forcer shall be used to bring up the details of the design.

3. Piercing shall be as indicated.

4. The badge shall be dapped to a radius of 3-3/8 inch ± 1/4 inch along the horizontal plane.

5. If hard enamel and soft baked enamel are used then the material will be Gilding Metal 95/5 (UNS Alloy C-210). Epoxy and enamel colors shall conform to TIOH Hard Enamel Chip Numbers listed below:

6. Scroll lettering shall be as specified in the procurement document and may be cut into the working die or the badge. Letters shall be 1/8 inch in height, block style, and filled with black unstoned epoxy or soft baked enamel.

7. Each badge shall be numbered consecutively with the number specified in the procurement document. Numbers shall be 1/8 inch high, engraved, equally spaced, and aligned in an arc within the unembossed area provided on the lower obverse side. Numbers shall be filled with black unstoned epoxy or soft baked enamel.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:45Z
Check the source to verify that this is the current version before use.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2024-089)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:45Z
Check the source to verify that this is the current version before use.