INCH-POUND

MIL-DTL-3628/138A
21 September 2000
SUPERSEDING
MIL-DTL-3628/138
15 November 1996

DETAIL SPECIFICATION SHEET

BADGE, IDENTIFICATION, POLICE, CAP, DEFENSE PROTECTIVE SERVICE, OFFICE OF THE SECRETARY OF DEFENSE

Inactive for new design after 13 January 1999.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3628 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

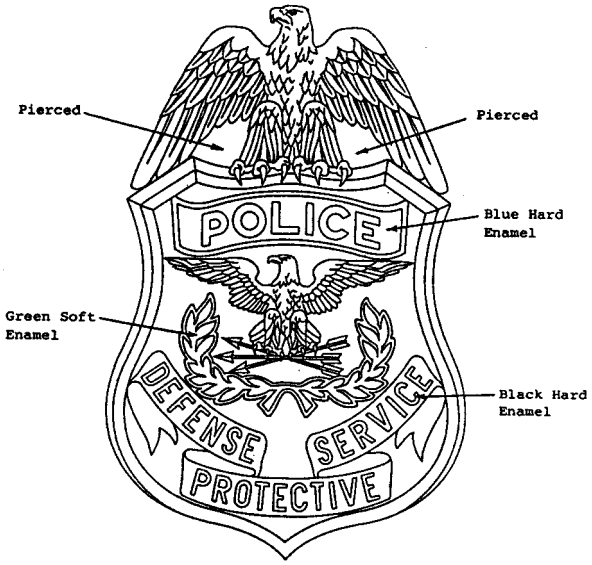

MATERIAL: Gilding Metal

FINISH: Hard Enameled, Soft Baked Enameled, Gold Plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 6.

DIMENSIONS:

HEIGHT (overall) 3 inches (REF)
WIDTH (overall): 2 inches (REF)
THICKNESS (at "POLICE" lettering): 0.085 inch ± 0.010 inch

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:45Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die. TIOH Drawing Number B-16-10 may be used as additional reference.

2. A full forcer shall be used to bring up the details of the design.

3. Piercing shall be as indicated.

4. Epoxy resin (stoning epoxy) may be used in lieu of both hard enamel and soft baked enamel at the option of the manufacturer. When epoxy resin is used in lieu of soft baked enamel, the epoxy resin shall not be stoned. Enamel and epoxy colors shall conform to TIOH Hard Enamel Chip Numbers listed below:

COLOR	CHIP NUMBER
Green	12
Black	26
Blue	33

5. The attaching device shall be a screw post and thumb nut with two registering prongs.

a. The screw post shall be located on the vertical center line of the badge 1-3/4 inch ± 1/64 inch from the bottom of the badge.

b. The registration prongs shall be located on a horizontal line 1/8 inch ± 1/64 inch in from the widest portion of the top of the shield on each side.

c. The screw post shall be 9/16 inch ± 1/32 inch long and 0.125 inch ± 0.10 inch in diameter and shall have a NO. 5-4 OUNC-2A thread.

d. The thumb nut shall be 0.625 inch ± 0.010 inch in diameter and shall have a NO. 5-4 OUNC-2B thread.

e. The registration prongs shall be 1/4 inch ± 1/64 inch in length and 0.045 inch ± 0.002 inch in diameter.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0027)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:45Z
Check the source to verify that this is the current version before use.