NOT MEASUREMENT SENSITIVE

MIL-DTL-3628/139A
15 December 1997
SUPERSEDING
MIL-DTL-3628/139
15 November 1996

DETAIL SPECIFICATION SHEET

BADGE, IDENTIFICATION, OFFICE OF THE SECRETARY OF DEFENSE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3628 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

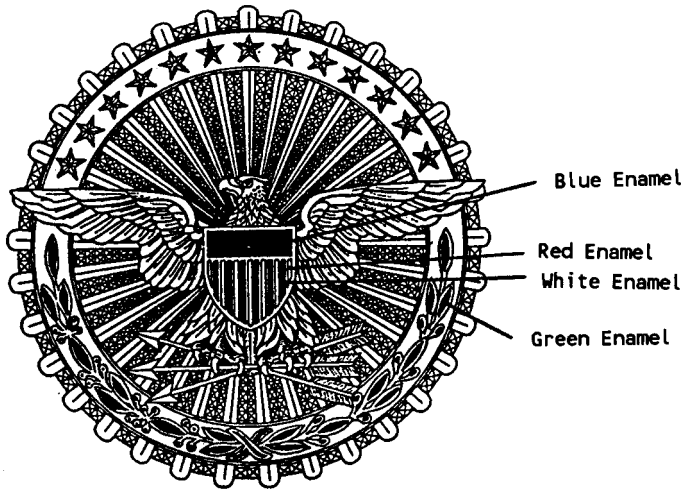

MATERIAL:
BASE: Red Brass
DEVICE: Gilding Metal

FINISH:
BASE: Nickel Plated, Silver Plated, Oxidized, Relieved, Matte Finish and shall match TIOH Metal Finish Chip Number 14.
DEVICE: Hard Enameled, Gold Plated, Matte Finish with Stars and Highlights Polished and shall match TIOH Metal Finish Chip Number 8.

DASH NO.
-1: Regular Size
-2: Miniature Size

DIMENSIONS:
DIAMETER:
-1: 2 inches (5.08 cm)(REF)
-2: 1-1/2 inches (3.81 cm)(REF)

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:46Z
Check the source to verify that this is the current version before use.

THICKNESS:	BASE (Edge):	DEVICE (Wing Tips):
-1:	0.065 inch ± 0.010 inch (0.165 cm ± 0.025 cm)	0.060 inch ± 0.010 inch (0.152 cm ± 0.025 cm)
-2:	0.055 inch ± 0.010 inch (0.139 cm ± 0.025 cm)	0.055 inch ± 0.010 inch (0.139 cm ± (0.025 cm)

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. A mock forcer may be used to bring up the shield and ridge line of wings.

3. Attaching device shall be prong and clutch type. For Dash No. -1, three prongs shall be located on a 1-5/8 inch ± 1/64 inch (4.13 cm ± 0.04 cm) diameter circle. For Dash No. -2, three prongs shall be located on a 1-1/8 inch ± 1/64 inch (2.86 cm ± 0.04 cm) diameter circle. For both Dash No. -1 and -2, the prongs shall be spaced 120 degrees apart with the top prong located on the vertical center line at the top of the badge.

4. The device shall be attached to the base by means of a screw post and Type A back plate shown on TIOH Drawing 4-4-89. The screw post shall be made from any type brass. The back plate shall be made from any type of 1/4 inch (0.64 cm) hard brass. The screw post shall be 0.140 inch ± 0.005 inch (0.355 cm ± 0.012 cm) long and shall be hard soldered or fused to the device in a location to correctly position the device on the base. The base shall have a 0.130 inch ± 0.003 inch (0.330 ± 0.007 cm) square hole cut through and centered on the base.

5. Enameled areas shall be as indicated. The color shall conform to the TIOH chip numbers listed below or the standard sample.

COLOR	CHIP NUMBER
Red	1
Green	12
Blue	18
White	28

6. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

7. The base shall be lacquered prior to assembly. The device may be lacquered at the option of the manufacturer.

8. The area around the eagle's head and the arrow heads shall be pierced for Dash -1 and -2.

9. The shield for Dash No. -1 has 13 stripes and the shield for Dash No. -2 has 9 stripes. The stripes for both shields shall be enameled with alternating white and red; beginning with white and ending with white.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Air Force - 45
Navy - NU

Preparing activity:
Army - IH

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:46Z
Check the source to verify that this is the current version before use.

Review activities: (Project No. 8455-0919)
  Air Force - 32, 82, 99
  Navy - MC
  Coast Guard - CG
  DLA - CT

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:46Z
Check the source to verify that this is the current version before use.