NOT MEASUREMENT SENSITIVE

MIL-DTL-3628/139B
15 December 1999
SUPERSEDING
MIL-DTL-3628/139A
15 December 1997

DETAIL SPECIFICATION SHEET

BADGE, IDENTIFICATION, OFFICE OF THE SECRETARY OF DEFENSE

Inactive for new design after 13 January 1999.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3628 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

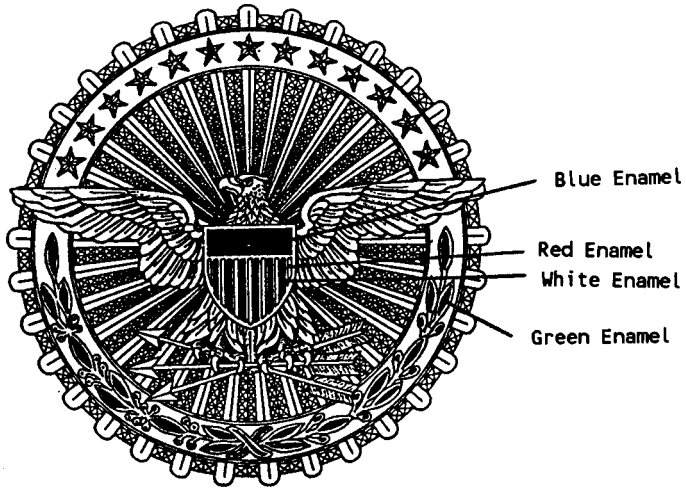

MATERIAL:

BASE: Red Brass
DEVICE: Gilding Metal

DASH NO.
-1: Regular Size
-2: Miniature Size

FINISH:

BASE: Nickel Plated, Mirror-like Polished and shall match TIOH Metal Finish Number 16.
DEVICE: Hard Enameled, Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:46Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

DIAMETER:
-1: 2 inches (REF)
-2: 1-1/2 inches (REF)

THICKNESS:	BASE (at edge):	DEVICE (at wing tips):
-1:	0.065 inch ± 0.010 inch	0.060 inch ± 0.010 inch
-2:	0.055 inch ± 0.010 inch	0.055 inch ± 0.010 inch

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. A mock forcer may be used to bring up the shield and ridge line of the wings.

3. Attaching device shall be prong and flat ball type clutch. For Dash -1, three prongs shall be located on a 1-5/8 inch ± 1/64 inch diameter circle. For Dash -2, three prongs shall be located on a 1-1/8 inch ± 1/64 inch diameter circle. For both Dash -1 and -2 badges, the prongs shall be spaced 120 degrees apart with the top prong located on the vertical center line at the top of the badge.

4. The device shall be attached to the base by means of a screw post and Type A back plate as shown on TIOH drawing number 4-4-89. The screw post shall be made from any type brass. The back plate shall be made from any type of 1/4 inch hard brass. The screw post shall be 0.140 inch ± 0.005 inch long and shall be hard soldered or fused to the device in a location to correctly position the device on the base. The base shall have a 0.130 inch ± 0.003 inch square hole cut through and centered on the base.

5. Enameled areas shall be as indicated. The color shall conform to the TIOH chip numbers listed below.

COLOR	CHIP NUMBER
Red	1
Green	12
Blue	18
White	28

6. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

7. The area around the eagle's head and the arrow heads shall be pierced for Dash -1 and -2 badges.

8. The shield for Dash -1 has 13 stripes; the shield for Dash -2 has 9 stripes. The stripes for both shields shall be enameled alternating white and red, beginning with white and ending with white.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:46Z
Check the source to verify that this is the current version before use.

9. At the option of the manufacturer for commercial sale only, the device for Dash -1 and Dash -2 badges may be manufactured using 22 Karat Gold Plate with a Mirror-like Polish and Nickel Underplating which shall match TIOH Metal Finish Chip Number 9.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Air Force - 45
Navy - NU

Preparing activity:
Army - IH

Review activities:
Air Force - 32, 82, 99
Navy - MC
Coast Guard - CG
DLA - CT

(Project No. 8455-1002)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:46Z
Check the source to verify that this is the current version before use.