NOT MEASUREMENT SENSITIVE


MIL-DTL-3628/139E
08 June 2022
SUPERSEDING
MIL-DTL-3628/139D
01 July 2019

DETAIL SPECIFICATION SHEET

BADGE, IDENTIFICATION, OFFICE OF THE SECRETARY OF DEFENSE

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3628.

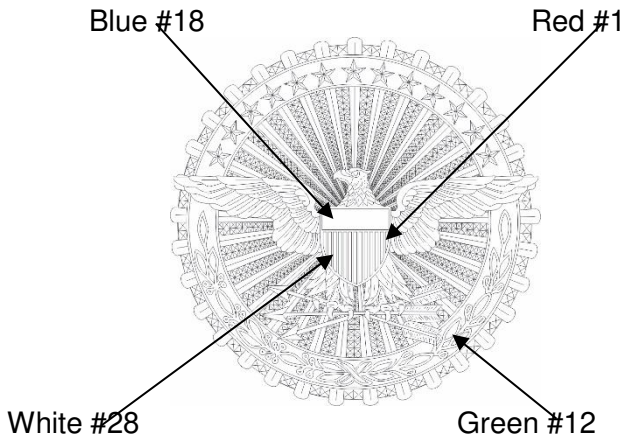

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL:
BASE: Red Brass 85/15 (UNS Alloy No. C-230)
DEVICE: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH:
BASE: Nickel Plated, Mirror-like Polished and shall match The Institute of Heraldry (TIOH) Metal Chip Number 16.
DEVICE: Epoxy resin (Stoning epoxy) 24K Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:46Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
DIAMETER:
-1: 2 inches (REF)
-2: 1-1/2 inches (REF)
THICKNESS:
BASE (At edge):
-1: 0.065 inch ± 0.010 inch
-2: 0.055 inch ± 0.010 inch
DEVICE (At wing tips):
-1: 0.060 inch ± 0.010 inch
-2: 0.055 inch ± 0.010 inch

ATTACHING DEVICE:

1. The attaching device shall be prong and flat ball type clutch.

2. -1, three prongs shall be located on a 1-5/8 inch ± 1/64 inch diameter circle. -2, three prongs shall be located on a 1-1/8 inch ± 1/64 inch diameter circle.

3. For both -1 and -2 badges, the prongs shall be spaced 120 degrees apart with the top prong located on the vertical center line at the top of the badge.

4. The device shall be attached to the base by means of a screw post and Type A back plate as shown on TIOH drawing number 4-4-89 specified in MIL-DTL-15665.

5. The screw post shall be made from any type brass. The back plate shall be made from any type of 1/4 inch hard brass. The screw post shall be 0.140 inch ± 0.005 inch long and shall be hard soldered or fused to the device in a location to correctly position the device on the base. The base shall have a 0.130 inch ± 0.003 inch square hole cut through and centered on the base.

EPOXY: Epoxy resin shall be applied to the Badge as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below. If hard enamel is used then the material will be Gilding Metal 95/5 (UNS Alloy C-210).

TIOH HARD ENAMEL COLOR CHIPS	
COLOR	**CHIP NUMBER**
Red	#1
Blue	#18
White	#28
Green	#12

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. A mock forcer may be used to bring up the shield and ridge line of the wings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:46Z
Check the source to verify that this is the current version before use.

3. The area around the eagle's head and the arrow heads shall be pierced for -1 and -2 badges.

4. Hard enamel may be used in lieu of epoxy resin (Stoning epoxy) at the option of the manufacturer.

5. The shield for -1 has 13 stripes; the shield for -2 has 9 stripes. The stripes for both shields shall be epoxies alternating white and red, beginning with white and ending with white.

6. At the option of the manufacturer for commercial sale only, the device for -1 and for -2 badges may be manufactured using 22 Karat Gold Plate with a Mirror-like Polish and Nickel Underplating which shall match TIOH Metal Finish Chip Number 9.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - IH
Air Force - 11
Navy - NU

Preparing activity:
Army - IH

Review activities:
Navy - MC, CG1
DLA - CT

(Project No. 8455-2022-120)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:46Z
Check the source to verify that this is the current version before use.