NOT MEASUREMENT SENSITIVE

MIL-DTL-3628/140
15 November 1996
SUPERSEDING
MIL-B-41809/4H
21 September 1994

DETAIL SPECIFICATION SHEET

BADGE, IDENTIFICATION AND INSIGNIA, SERVICE CAP, CIVILIAN POLICE AND CIVILIAN GUARD, DEPARTMENT OF DEFENSE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3628 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

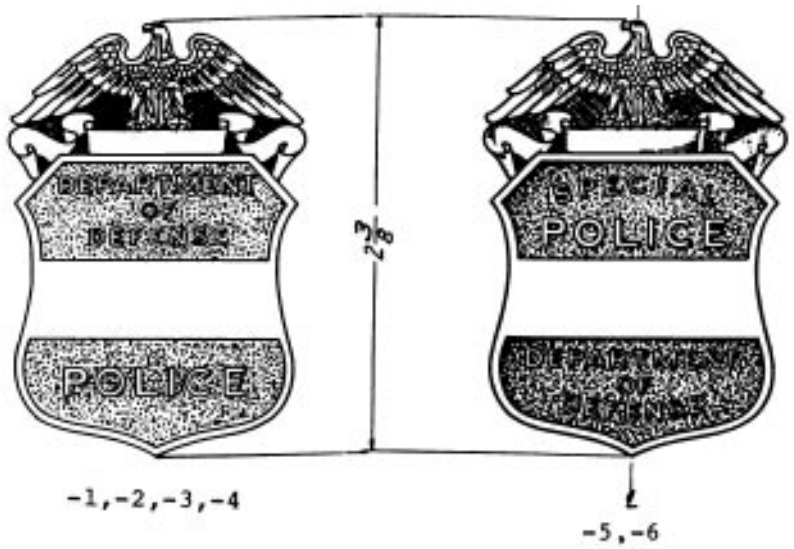

DASH NO.
-1: Identification (Non-Supervisory)
-2: Service Cap (Non-Supervisory)
-3: Identification (Supervisory)
-4: Service Cap (Supervisory)
-5: Identification (Civilian Guard)
-6: Service Cap (Civilian Guard)

MATERIAL:
-1, -2, -5, -6: Red Brass or Nickel Silver
-3, -4: Red Brass

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:46Z
Check the source to verify that this is the current version before use.

FINISH:
-1, -2, -5, -6:
LETTERING, RIM, BAND OF SHIELD AND SCROLL - Nickel Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16.
EAGLE - Nickel Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 18.
PEBBLED BACKGROUND OF SHIELD AND PEBBLED AREA BEHIND EAGLE AND SCROLL - Nickel Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 17.
-3, -4:
LETTERING, RIM, BAND OF SHIELD AND SCROLL - Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.
EAGLE - Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.
PEBBLED BACKGROUND OF SHIELD AND PEBBLED AREA BEHIND EAGLE AND SCROLL - Gold Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 7.

DIMENSIONS:
HEIGHT (Overall) 2-7/16 inches (6.19 cm) (REF)
WIDTH (Overall): 1-5/8 inches (4.13 cm) (REF)
THICKNESS (At Lowest Edge): 0.065 inch ± 0.010 inch (0.165 cm ± 0.025 cm)

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. A mock forcer may be used to bring up the areas of the shield and eagle.

3. The attaching device for Dash No. -1, -3 and -5 shall be a coil pin type with heavy duty side opening catch. The pin stem shall be 1-3/4 inches ± 1/64 inch (4.45 cm ± 0.04 cm) long. The pin and catch shall be hard soldered or fused on the vertical center line with the joint located 11/16 inch ± 1/64 inch (1.75 cm ± 0.04 cm) down from the top of the badge.

4. The attaching device for Dash No. -2, -4 and -6 shall be a screw post and thumb nut with one registering prong. The screw post shall be hard soldered or fused on the vertical center line 1 inch ± 1/32 inch (2.54 cm ± 0.08 cm) from the top of the badge. The registration prong shall be located on the vertical center line 1/4 inch ± 1/32 inch (0.64 cm ± 0.08 cm) down from the top of the badge.

a. The screw post shall be 1/2 inch ± 1/32 inch (1.27 cm ± 0.08 cm) long and 0.125 inch ± 0.10 inch (0.32 cm ± 0.025 cm) in diameter and shall have a NO 5-4 OUNC-2A thread.
b. The thumb nut shall be 0.625 inch ± 0.010 inch (1.59 cm ± 0.25 cm) in diameter and shall have a NO 5-4 OUNC-2B thread.
c. The registration prong shall be 1/4 inch ± 1/64 inch (0.64 cm ± 0.04 cm) in length and 0.045 inch ± 0.002 inch (0.114 cm ± 0.005 cm) in diameter.

5. Dash No. -1, -2, -5 and -6 may be rhodium plated with the lettering, rim, scroll and band of shield having a mirror-like polish.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:46Z
Check the source to verify that this is the current version before use.

Custodian:
Army - IH
Air Force - 45
Navy - NU

Preparing activity:
Army - IH

Review activities:
Air Force - 32, 82, 99
Navy - MC
Coast Guard - CG
DLA - CT

(Project No. 8455-0866)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:46Z
Check the source to verify that this is the current version before use.