NOT MEASUREMENT SENSITIVE


MIL-DTL-3628/141A
12 May 1997
SUPERSEDING
MIL-DTL-3628/141
15 November 1996

DETAIL SPECIFICATION SHEET

BADGE, IDENTIFICATION, PRESIDENTIAL SERVICE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-3628 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

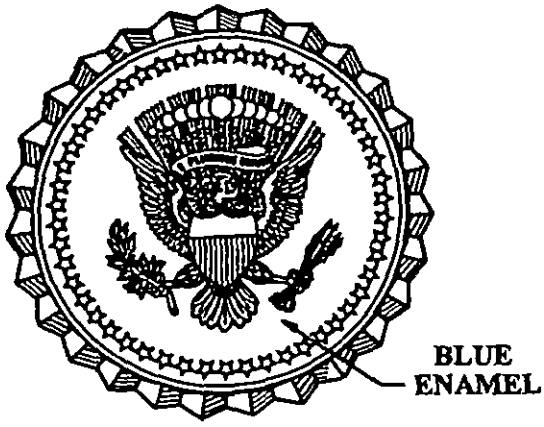



DEVICE

MATERIAL:
BASE AND CENTER DISC: Gilding Metal
DEVICE: Red Brass

FINISH:
BASE: Gold Plated, Matte Finish, Peaks of Rays Polished and shall match TIOH Metal Finish Chip Number 8.
CENTER DISC: Hard Enameled, Nickel Plated, Silver Plated, Matte Finish and shall match TIOH Metal Finish Chip Number 12.
DEVICE: Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:47Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

OUTSIDE DIAMETER:	1-15/16 inches (4.92 cm) (REF)
DIAMETER OF CENTER DISC:	1-23/32 inches (4.36 cm) (REF)
OVERALL HEIGHT OF DEVICE:	1-13/64 inches (3.08 cm) (REF)
DEVICE (Thickness at Shield):	0.062 inch ± 0.010 inch (0.157 cm ± 0.025 cm)
ASSEMBLED THICKNESS (At Shield):	0.250 inch - 0.010 inch + 0 inch (0.636 cm - 0.025 cm + 0 cm)

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Enamel area shall be blue as indicated. The color shall conform to TIOH color chip Number 20 or the standard sample.

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer. When epoxy resin is used, rivets shall be used to attach the center disc and device to the base.

4. Piercing on the device shall be as indicated.

5. The center disc and the superimposed device shall be secured to the base by two or more rivets or soft soldered. When rivets are used, they may be an integral part of the device or fabricated from any type brass and soldered to the reverse of the device. The device shall follow the contour of the blue enamel disc.

6. Attaching device shall be prong and clutch type. Three prongs shall be located on a 1-1/2 inch ± 1/64 inch (3.81 cm ± 0.04 cm) diameter circle. Each prong shall be spaced 120 degrees apart with the top prong located on the vertical center line at the top of the badge.

7. Each badge shall be engraved with a serial number as specified in the procurement document using a condensed roman numeral. The numerals shall be 3/32 inch ± 1/64 inch (0.24 cm ± 0.04 cm) in height. The serial number shall be centered on the reverse of the badge with the base line of the number 1/4 inch ± 1/64 inch (0.64 cm ± 0.04 cm) from the lower edge of the badge.

8. The entire badge shall be lacquered after assembly.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH
Air Force - 45
Navy - NU

Review activities:
Air Force - 32, 82, 99
Navy - MC
Coast Guard - CG
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0866)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:47Z
Check the source to verify that this is the current version before use.