INCH-POUND

FF-B-2844/01
15 FEBRUARY 1994

FEDERAL SPECIFICATION SHEET

BEARING, BALL, ANNULAR: SINGLE ROW. RADIAL, NOM-FILLING SLOT, MINIATURE SIZE, INSTRUMENT TYPE (CHROMIUM ALLOY STEEL)

The General Services Administration has authorized the use of this specification by all Federal Agencies.

The complete requirements for procuring the bearing described herein shall consist of this document and the latest issue of FF-B-2844/GEN.

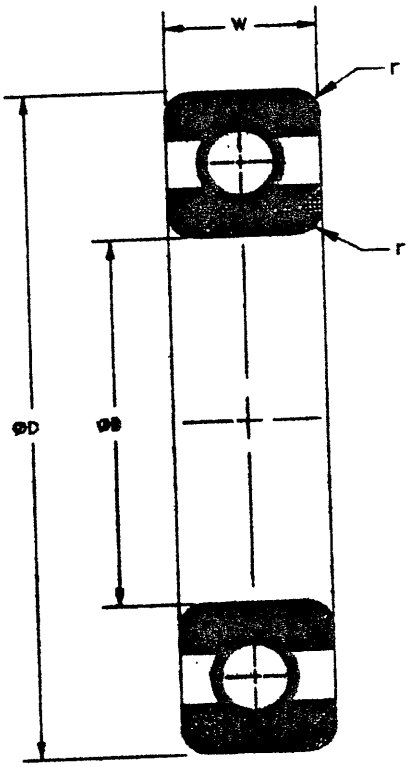


FIGURE 1.
OPEN(NO SHIELDS OR SEALS)




FIGURE 2.
SINGLE SHIELD




FIGURE 3.
DOUBLE SHIELD




FIGURE 4.
SINGLE SEAL




FIGURE 5.
DOUBLE SEAL



FIGURE 6.
SINGLE SHIELD AND SEAL

BEARING CONFIGURATIONS

FSC 3110

AMSC/NA

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:47Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

1. **Boundary dimensions.** The boundary dimensions shall be specified in the part number by the bore codes in Table I.

2. MATERIAL

2.1 **Rings and balls.** The rings and balls of bearings covered by this specificaion shall be made of chromium-alloy steel 52100 (UNS 52986).

2.2 Closures. The shields and seals shall be fabricated from any material unless otherwise specified and shall be removable or non-removable type. Seals shall be the impervious contact type.' The number of shields and seals required shall be specified in the part number by using the codes listed in Table IV.

2.3 Cage. Cages shall be manufactured from any material unless otherwise specified. The type of cage required shall be specified in the part number by using the codes listed in Table II.

3. METROLOGY

3.1 Radial internal clearance. The tolerance limits for radial internal clearance are as follows and shall be specified in the part number by using the codes listed in Table III.

Clearance in 0.0001 inches	
Tight Clearance	1 - 3
Normal clearance	2 - 5
Loose clearance	5 - 8
Extra loose clearance	8 - 11


3.2 Tolerance class. The tolerance class limits shall be the following: ABEC-1 In Accordance With (IAW) ANSI/AFBMA Std-20; ABEC 3P IAW ANSI/AFBMA STD 12.2. The tolerance-class shall be specified in the part number by using the codes listed in Table III.

4. Lubricant or perservative compound. The lubricant or preservative compound shall be specified in the part number by using the codes listed in Table IV. Preservative compound shall be applied to all open bearings (no shields or seals) and to single closure bearings (single shield or single seal) that have no additional lubricant requirement. Thus, for these bearings, the bearing part number shall include the "C", "F" or "L" suffix from TABLE IV. For double closure or single closure bearings that require lubricant, the bearing part number shall include the preferred suffix from table IV as required. When grease is required, the bearing void (the airspace between the inner and outer ring of the assembled bearing) shall be 25 to 40 percent filled.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:47Z
Check the source to verify that this is the current version before use.

5. **Part number** 'The part number consists of the Federal specification prefix letters FFB, the basic number of the Federal Specification, the specification sheet number, bore code, and alpha or numeric codes for cage, radial internal clearance and tolerance class, lubricant and closures,

EXAMPLE: FFB2844 /0 AN 4 A P

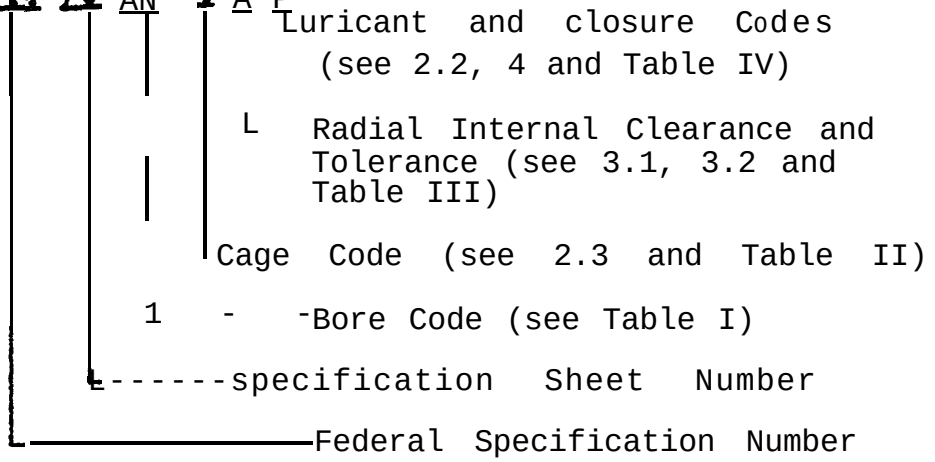

FFB2844/01AN4AP indicates - Bearing Bore 0.1250 inches: outside diameter 0.2500 inches; width 0.09370 inches; cage type, machined non metallic; radial internal clearance, tight; tolerance class ABEC 1; single shield and single seal; lubricant in accordance with DoD-G-24508.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:47Z
Check the source to verify that this is the current version before use.

TABLE I. BOUNDARY DIMENSIONS 1/

Bore Code	OB Bore Diameter (inch)	OB Bore Diameter (MM)	OD Outside Diameter	W Width	Chamfer Min. 2/	Dia. Series 3/	Dynamic load Rating (lbs)
AA	0.0469	1.1906	0.1562	0.0625	.003	9	18
AB	0.0469	1.1906	0.1562	0.0937	.003	9	18
AC	0.0550	1.3970	0.1875	0.0781	.003	9	28
AD	0.0550	1.3970	0.1875	0.1094	.003	9	28
AE	0.0781	1.9844	0.2500	0.0937	.003	9	36
AF	0.0781	1.9844	0.2500	0.1406	.003	9	36
AG	0.0937	2.3812	0.1875	0.0625	.003	7	24
AH	0.0937	2.3812	0.1875	0.0937	.003	7	24
AJ	0.0937	2.3812	0.2500	0.0937	.003	9	36
AK	0.0937	2.3812	0.2500	0.1094	.003	9	36
AL	0.0937	2.3812	0.3125	0.1094	.003	0	54
AM	0.0937	2.3812	0.3125	0.1406	.003	0	54
AN	0.1250	3.1750	0.2500	0.0937	.003	7	36
AP	0.1250	3.1750	0.2500	0.1094	.003	7	36
AR	0.1250	3.1750	0.3125	0.1094	.003	9	54
AT	0.1250	3.1750	0.3125	0.1406	.003	9	54
AU	0.1250	3.1750	0.3750	0.1094	.005	2	76
AW	0.1250	3.1750	0.3750	0.1406	.005	2	76
AY	0.1562	3.9687	0.3125	0.1094	.003	7	37
BA	0.1562	3.9687	0.3125	0.1250	.003	7	37
BB	0.1875	4.7625	0.3125	0.1094	.003	7	43
BC	0.1875	4.7625	0.3125	0.1250	.003	7	43
BD	0.2500	6.3500	0.3750	0.1250	.003	7	36
BE	0.3125	7.9375	0.5000	0.1562	.003	7	99

1/ All dimensions are in inches unless otherwise specified.
2/ The Chamfer on bearings will clear a maximum fillet radius equal to the minimum chamfer.
3/ Diameter Series is a soft metric conversion of the inch outside diameter and width in comparison with the boundary dimension in AFBMA Std 20.

TABLE II. CAGES

CODE	CAGE
1	Manufacturers Standard 1/
2	Molded Plastic
3	Machined Brass or Bronze
4	Machined Non Metallic (phenolic)

1/ One piece crown or two piece ribbon

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:47Z
Check the source to verify that this is the current version before use.

TABLE III. RADIAL INTERNAL CLEARANCE AND TOLERANCE CLASS

Code	Internal Clearance	Tolerance
A B C D	Tight Normal Loose Extra Loose	ABEC 1
E F G H	Tight Normal Loose Extra Loose	ABEC 3P

TABLE IV. LUBRICANTS AND CLOSURES

Code	Lubricant	Closure
A B C	DOD-G-24508 MIL-G-81322 Preservative 1/	OPEN (FIG 1)
D E F	DOD-G-24508 MIL-G-81322 Preservative 1/	SINGLE SHIELD (FIG 2)
G H	DOD-G-24508 MIL-G-81322	DOUBLE SHIELD (FIG 3)
J K L	DOD-G-24508 MIL-G-81322 Preservative 1/	SINGLE SEAL (FIG 4)
M N	DOD-G-24508 MIL-G-81322	DOUBLE SEAL (FIG 5)
P R	DOD-G-24508 MIL-G-81322	SINGLE SHIELD AND SEAL (FIG 6)

1/ Preservative shall be in accordance with MIL-P-197.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:47Z
Check the source to verify that this is the current version before use.