GG–C–101b
6 MARCH 1951
SUPERSEDING
Fed. Spec. GG–C–101a
20 April 1939

FEDERAL SPECIFICATION

CALENDAR PADS AND STANDS

This specification was approved on the above date by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. CLASSIFICATION

1.1 Types.—Calendar pads and stands covered by this specification shall be of the following types (see figs. 1 through 5):

Type I.—Ordinary folding.
Type II.—Bound daily memorandum.
Type III.—Executive, large size, folding.
Type IV.—Tear-off (combination calendar and memo pad).
Size 1.—For 5- by 8-inch pad.
Size 2.—For 6¼- by 10-inch pad.

1.2 Colors.—(See 3.4.)

2. APPLICABLE SPECIFICATIONS

2.1 The following Federal Specifications, of the issues in effect on date of invitation for bids, form a part of this specification:

FF–B–571—Bolts; Nuts; Studs; and Tap-Rivets (and Material for Same).
UU–P–641—Paper; Writing.

(Copies of Federal specifications and the Federal Specifications Index may be obtained upon application, accompanied by money order, coupon, or cash, to the Superintendent of Documents, Government Printing Office, Washington 25, D. C. Prices may be obtained from the Superintendent of Documents.)

2.2 Specifications and other publications applicable only to individual departments are listed in section 7.

3. REQUIREMENTS

3.1 General.—The printing on all types of pads shall be so arranged as to provide the maximum amount of space for memoranda consistent with legibility of printing.

3.2 Material.—The material used in the construction of calendar pads and stands shall be of good, standard commercial quality suitable for the purpose intended.

3.2.1 *Paper.*—The paper used in the manufacture of pads of all types shall be at least substance 16 (17 by 22 inches, 500 sheets, 16 pounds), conforming to the requirements of Federal Specification UU–P–641, with exception of folding endurance.

3.2.2 *Metal.*—Calendar stand, when made of metal, shall be 18 to 17 gage (0.0478 to 0.0538 inch) thick.

3.2.3 *Bolts, nuts, and screws.*—Bolts, nuts, and screws, if used, shall conform to the requirements of Federal Specification FF–B–571.

3.2.4 *Protective treatment.*—Materials used in the construction of calendar stands that are subject to corrosion shall be protected against such corrosion in a manner that will in no way prevent compliance with the requirements of this specification. The use of any protective coating that will crack, chip, or scale with age or extremes of atmospheric conditions shall not be used.

3.3 Dimensions.—Variations in the dimensions of both the calendar pads and stands not exceeding ½ inch in width or length will be permitted, but the pads furnished shall be of such size and punchings as to fit stands of the dimensions specified in 3.6.1.1, 3.6.2.1, 3.6.3.1, and 3.6.4.1. The stands furnished shall be of such size and construction as to properly accommodate pads of the dimensions specified in 3.6.1.3, 3.6.2.3, 3.6.3.3, and 3.6.4.3.

3.4 Colors.—Unless otherwise specified in the invitation for bids, the colors of calendar stands shall be standard commercial colors, as specified.

3.5 Finishes.—Unless otherwise specified, standard commercial finishes will be acceptable.

3.6 Design and construction.—All calendar pads and stands shall be so constructed and

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:48Z
Check the source to verify that this is the current version before use.

designed as to give the greatest possible use with a minimum of space requirement for each type. Stands shall be similar to figures 1 to 5, inclusive. (See 6.5.)

3.6.1 *Type I, ordinary folding.*

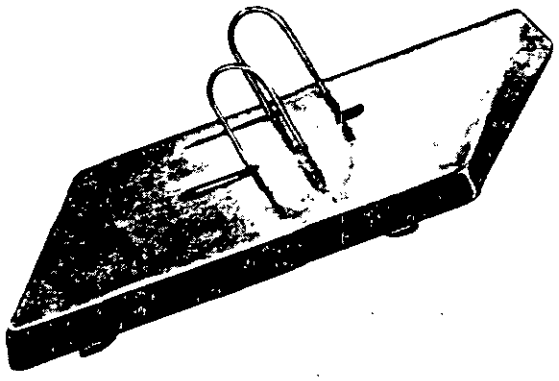


FIGURE 1.—*Type I, ordinary folding (for 3- by 3⅝-inch calendar pad).*

3.6.1.1 *Stand.*—The dimensions of the top surface of the stand shall be not less than 4 by 6½ inches. The binding wire shall be of corrosion-resisting metal or of steel, plated or coated to form a corrosion-resistant finish. The wire shall be between 3/32 and 5/32 inch in diameter, and shall be located as follows: Distance between centers, in a vertical direction, 1¼ inches; in a lateral direction, ⅞ inch; distance between top edge of stand and center of upper binding wire, approximately ½ inch; distance in a lateral direction, between edge of stand and center of binding wires, 2 13/16 inches; wires to extend 1 13/16 inches above surface of stand.

3.6.1.2 *Base.*—The under side of base shall be provided with securely attached protective shoes of rubber, felt, cork, or of other suitable material, at not less than four points, or shall be suitably formed and finished to preclude marring the surface on which the stand may rest. The base of stand shall rest firmly on any flat surface.

3.6.1.3 *Pad.*—The size of sheet shall be 3 inches wide and 3⅝ inches long, with two holes not less than 5/32 nor more than ¼ inch diameter, punched 1¼ inches between centers; distance from top edge of pad to center of top hole shall be ⅜ inch, and from center of holes to near edge of pad, 5/16 inch. Exposed pages shall show previous, present, and the following month; the number of expired and unexpired days of the year; the day and date in bold relief, and a blank space for memoranda.

3.6.2 *Type II, bound daily memorandum.*

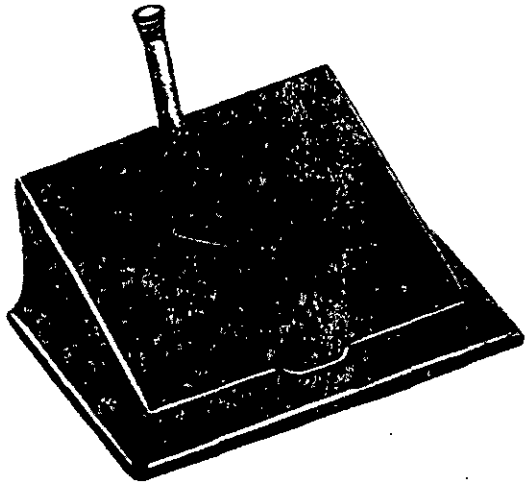


FIGURE 2.—*Type II, bound daily memorandum (for 2⅝- by 5-inch calendar pad).*

3.6.2.1 *Stand.*—The face shall be 2¾ by 5 inches, and shall be provided with threaded post and tap for fastening pad to the stand. Hole for the post shall be located equidistant from the sides of the stand and 5/16 inch from top edge. Post shall be not less than ⅛ nor more than 3/16 inch in diameter.

3.6.2.2 *Base.*—The base shall be as specified in 3.6.1.2.

3.6.2.3 *Pad.*—The pad shall be 2⅝ by 5 inches with a 3/16-inch round hole punched 5/16 inch from top and equidistant from sides. Each page shall show the day and date, the number of expired and unexpired days of the year, and a blank space for memoranda. The date shall be in bold relief.

3.6.3 *Type III, executive, large size, folding.*

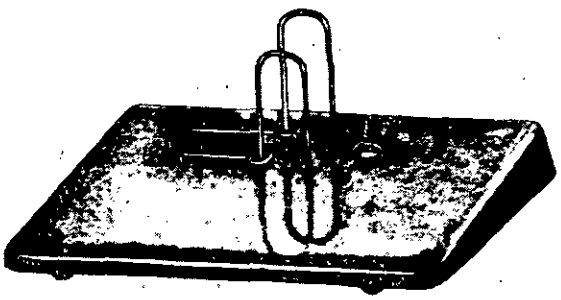


FIGURE 3.—*Type III, executive, folding (for 3½ by 5⅞-inch calendar pad).*

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:48Z
Check the source to verify that this is the current version before use.

3.6.3.1 *Stand.*—The dimensions of the top surface of the stand shall be not less than $6\frac{1}{8}$ by $7\frac{5}{8}$ inches. The binding wires shall be between $\frac{3}{32}$ inch and $\frac{5}{32}$ inch in diameter, and shall be located as follows: Distance between centers, in a vertical direction, 2 inches; in a lateral direction, not less than $\frac{13}{16}$ inch; distance between top edge of stand and center of upper binding wire not less than $\frac{5}{8}$ inch; distance, in a lateral direction, between edge of stand and center of binding wires, $3\frac{3}{8}$ to $3\frac{5}{8}$ inches; wires to extend $1\frac{13}{16}$ inches above surface of stand.

3.6.3.2 *Base.*—The base shall be as specified in 3.6.1.2.

3.6.3.3 *Pad.*—The size of sheet shall be $3\frac{3}{4}$ inches wide and $5\frac{7}{8}$ inches long, with two holes punched 2 inches between centers, and center of top hole to be $\frac{9}{16}$ inch from top of sheet and $\frac{5}{16}$ inch from near edge. Exposed pages shall show previous, present, and following month; the number of expired and unexpired days of the year; the day and date in bold relief; an appointment schedule on one page; and a blank space for memoranda on the other.

3.6.4 *Type IV, tear-off (combination calendar and memo pad).*

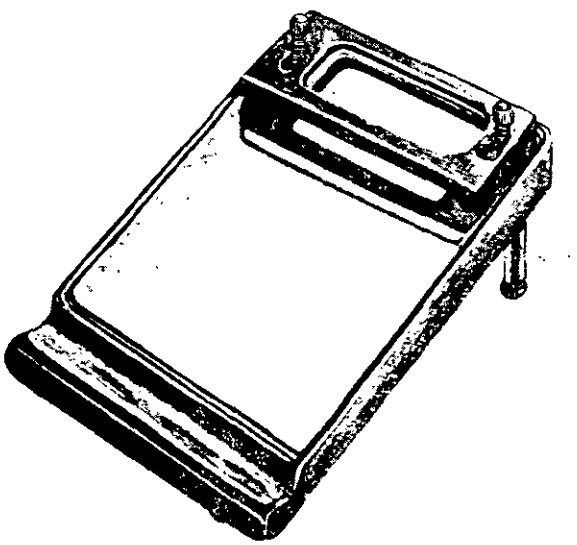


FIGURE 4.—*Type IV, size 1, tear-off (5- by 8-inch calendar pad).*

3.6.4.1 *Stand.*—This type of calendar stand shall be made in two sizes. The top dimension for size 1 calendar stand (5- by 8-inch pad) shall be $5\frac{9}{16}$ inches wide by $9\frac{1}{4}$ inches long; for size 2 stand ($6\frac{1}{4}$- by 10-inch pad) shall be $6\frac{9}{16}$

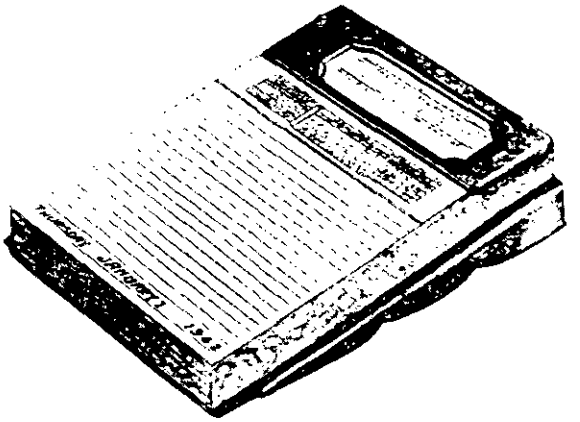


FIGURE 5.—*Type IV, size 2, tear-off calendar stand (for $6\frac{1}{4}$- by 10-inch pad).*

inches wide by $10\frac{3}{4}$ inches long. A frame-type holding plate shall be provided to hold the calendar pad properly in place, and shall be held to the calendar pad and stand by two serrated-head machine screw posts at upper corners. The holes in the holding plate shall be of the keyhole type, so that a slight turn of the screw will permit an easy removal of top plate, and removal and substitution of pad. Any other proper and simple retaining mechanism for the pad may be used. The diameter of the holding machine screw posts shall be not less than $\frac{1}{8}$ inch and not more than $\frac{3}{16}$ inch and the center-to-center distance between screw posts shall be $4\frac{11}{16}$ inches for size 1 calendar pad and $5\frac{29}{32}$ inches for size 2 calendar pad.

3.6.4.2 *Base.*—The base shall be as specified in 3.6.1.2.

3.6.4.3 *Pad.*—For size 1 calendar stand, the size of sheet shall be 5 inches wide by 8 inches long, with two holes not less than $\frac{5}{32}$ inch nor more than $\frac{1}{4}$ inch in diameter, punched $4\frac{11}{16}$ inches between centers, distance from top edge of paper to center of hole shall be $\frac{3}{4}$ inch, and from center of holes to near edge of pad, $\frac{1}{4}$ inch. The top of each page shall include a 12-month calendar to show through the frame-type holding plate. Exposed pages shall show previous, present, and the following month, the number of expired and unexpired days of year,

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:48Z
Check the source to verify that this is the current version before use.

the day and date in bold relief, an appointment schedule of one-half of page, and a blank or lined space for memoranda on the other. The appointment schedule may be omitted at the option of the procuring agency. The requirements of pad for size 2 calendar stand shall be as follows: The size of sheet shall be 6¼ inches wide by 10 inches long, with two holes not less than 5/32-inch nor more than ¼-inch in diameter, punched 5 29/32 inches between centers; distance from top edge of page to center of hole shall be 9/16 inch, and from center of holes to near edge of pad ¼ inch. Other requirements shall be the same as for size 1 pad.

3.7 Workmanship.—Calendar stands and pads shall be neatly made and have smoothly finished exposed edges. Binding wires shall be securely fastened to the stand and shall be so made as to offer the minimum likelihood of having loose parts or of becoming inoperative. Stands shall have an inclined, smooth top surface.

4. SAMPLING AND INSPECTION PROCEDURES

4.1 Sampling.—Six calendar pads and/or stands of each type and size shall be selected as representative of the lot.

4.1.1 *Lot.*—Unless otherwise specified in the invitation for bids, contract, or order, a lot shall consist of all calendar pads and stands submitted for inspection at the same time and under the same condition of manufacture and assembly.

4.2 Inspection.—Calendar pads and stands shall be inspected for workmanship, identification, and dimensions to determine compliance with the requirements of this specification.

5. PREPARATION FOR DELIVERY

5.1 Packaging, packing, and labeling.

5.1.1 *Calendar stands.*—Unless otherwise specified, calendar stands shall be packaged and packed in accordance with good commercial practice. Each package shall be labeled to show the type, size of type IV (where applicable) and the name of the commodity.

5.1.2 *Calendar pads.*—Unless otherwise specified, calendar pads shall be packaged and packed in accordance with good commercial practice. Each package shall be labeled to show the type, size of type IV (where applicable), the year, and the name of the commodity.

6. NOTES

6.1 Intended use.—Calendar pads and stands covered by this specification are intended for use in offices for keeping miscellaneous notes, appointments, and memoranda, and also to have a visual picture of date and year, etc. The different types of calendar stands are of different designs and hold different sizes of pads. Illustrations of different types of stands and pads shown herein, and sizes as specified in this specification, will aid the procuring agency in selecting the size and type required for any particular use.

6.2 Ordering data. — Purchasers should specify the type and size (where applicable) of calendar pad and stand required, color of stand, and should exercise any desired options offered herein. (See 1.1, 3.4, 3.5, 4.1.1, 5.1, 6.3, and 7.1.5.2.)

6.3 Bid samples.—For term contracts, bidders, when so requested, should furnish one sample of each of the types and sizes offered.

6.4 This specification covers only the types and sizes of the commodity as generally purchased by the Federal Government and is not intended to include all of the types, sizes, etc., which are commercially available.

6.5 *Reference to illustrations.*—The illustrations shown herein are for the convenience of identification, requisitioning, purchasing, and inspection officers, and are not intended to preclude the purchase of calendar pads and stands, which are otherwise in accordance with the requirements of this specification.

Patent notice.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:48Z
Check the source to verify that this is the current version before use.

7. DEPARTMENTAL REQUIREMENTS

7.1 The following specifications and other publications, of the issues in effect on date of invitation for bids, and special requirements, form a part of this specification for purchases made under this specification by the respective departments.

7.1.1 *Army, Navy, and Air Force.*

7.1.1.1 *Applicable specifications and other publications.*

Federal Specifications:

LLL-B-631—Boxes; Fiber, Corrugated (for Domestic Shipment).

LLL-B-636—Boxes; Fiber, Solid (for Domestic Shipment).

Military Specifications:

JAN-P-106—Packaging and Packing for Overseas Shipment—Boxes; Wood, Nailed.

JAN-P-120—Packaging and Packing for Overseas Shipment—Cartons, Folding, Paperboard.

JAN-P-125—Packaging and Packing for Overseas Shipment—Barrier-Materials, Waterproof, Flexible.

JAN-P-140—Packaging and Packing for Overseas Shipment—Adhesives, Water-Resistant, Case-Liner.

U. S. Army Specifications:

94-40645—Marking; Exterior, Domestic and Export Shipment, by Contractors.[1]

100-2—Standard Specification for Marking Shipments by Contractors.[2]

Navy Department Specification:

General Specifications for Inspection of Material.[3]

Bureau of Supplies and Accounts Publication:

Navy Shipment Marking Handbook.[3]

(Copies of specifications required for Army purchases may be obtained upon application to the procuring agency. Both the title and identifying symbol or number should be stipulated when requesting copies.

(Copies of Federal and Military specifications required for Navy purchases, Navy Department specifications, and the Navy Shipment Marking Handbook may be obtained without cost upon application to the Bureau of Supplies and Accounts, Navy Department, Washington 25, D. C., except that Naval activities should make application to the Commanding Officer, Naval Supply Center, Norfolk 11, Va. Both the title and identifying symbol or number should be stipulated when requesting copies of specifications.

(Copies of specifications required for Air Force purchases may be obtained from the Commanding General, Air Matériel Command, Wright-Patterson Air Force Base, Dayton 1, Ohio.)

7.1.2 *Inspection procedures.*—For Naval purchases, the general inspection procedures shall be in accordance with General Specifications for Inspection of Material.

7.1.3 *Packaging.*—Calendar stands shall be individually packaged in a folding paperboard carton conforming to the requirements of Specification JAN-P-120. Pads shall be individually banded, and wrapped or packaged in a carton conforming to the requirements of JAN-P-120.

7.1.4 *Packing.*

7.1.4.1 *Domestic shipment.*—Calendar stands and pads of one type only, packaged as specified in 7.1.3, shall be packed separately in corrugated or solid fiberboard boxes fabricated in accordance with the requirements for style RSC of Federal Specifications LLL-B-631 and LLL-B-636, respectively. Gross weight of each shipping box shall not exceed 65 pounds. All flaps shall be securely sealed with a good-quality adhesive applied throughout the entire area of contact of flaps.

7.1.4.2 *Overseas shipment.*—Calendar stands and pads of one type only, packaged as specified in 7.1.3, shall be packed separately in nailed wood boxes constructed and strapped in conformance with the requirements of Military Specification JAN-P-106, style 2 or 4. Gross weight of each container shall not exceed 100 pounds. Each overseas shipping container shall be provided with a sealed case liner or prefabricated bag made of waterproof barrier-material in accordance with Military Specification JAN-P-125, type L-2 or M. Closures shall be completely sealed with a continuous seam at least ¾ inch wide of water-resistant adhesive conforming to Military Specification JAN-P-140.

7.1.5 *Marking.*

7.1.5.1 *Cartons.*—One end of each package

[1] Applicable to Air Force purchases only.
[2] Applicable to Army purchases only.
Applicable to Navy purchases only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:48Z
Check the source to verify that this is the current version before use.

shall be labeled or stenciled with the following information:

Nomenclature
Type (pad or stand)
Year (on pads)
Stock number
Name and address of manufacturer

7.1.5.2 *Shipping containers.*

7.1.5.2.1 *Army.*—Each shipping container shall be marked in accordance with the requirements of U. S. Army Specification 100–2.

7.1.5.2.2 *Navy.*—Each shipping container shall be marked in accordance with the requirements of the Navy Shipment Marking Handbook.

7.1.5.2.3 *Air Force.*—Each shipping container shall be marked in accordance with the requirements of U. S. Army Specification 94–40645.

7.1.6 *Ordering data.*—Requests, requisitions, schedules, and contracts or orders should specify whether the subject commodity is to be packed and shipping containers marked for domestic or overseas shipment. (See 7.1.4 and 7.1.5.)

NAVY INTEREST: *MC* S

This specification is a part of Section IV, Part 5, of the Federal Standard Stock Catalog.

For sale by the Superintendent of Documents, U. S. Government Printing Office
Washington 25, D. C. - Price 5 cents

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:48Z
Check the source to verify that this is the current version before use.