GG-G-86C
January 15, 1987
SUPERSEDING
GG-G-86B
March 11, 1965

FEDERAL SPECIFICATION

GAGE; SHEET AND PLATE, TWIST DRILL, DRILL ROD, AND WIRE

This specification is approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers gages used for determining the thickness or diameter of sheet and plate metal, twist drills, drill rod, and wire.

1.1.1 Federal specification coverage. Federal specifications do not include all varieties of the commodity as indicated by the title of the specification or which are commercially available, but are intended to cover only those generally used by the Federal Government.

1.2 Classification.

1.2.1 Types. The gages shall be of the following types, classes, and styles, as specified (see 6.2):

Type I. Circular gages.
- Class 1. United States standard for sheet and plate iron, steel and wrought iron.
- Class 2. Steel wire gage.
- Class 3. American wire gage.
- Class 4. Birmingham wire gage.
- Class 5. Music wire gage.

Type II. Rectangular gages.
- Class 1. United States standard for sheet and plate iron, steel and wrought iron.
- Class 2. Twist drill and drill rod gage.
  - Style A. Large (size number 1 to 60).
  - Style B. Small (size number 61 to 80).
  - Style C. Drill, fractional - sizes 1/16 inch to 1/2 inch, inclusive.
  - Style D. Drill, letter - sizes A to Z, inclusive.
- Class 3. Twist drill and machine screw tap gage.

2. APPLICABLE DOCUMENTS

2.1 Specifications and standards. The following specifications and standards, of the issues in effect on the date of invitation for bids, or request for proposal, form a part of this specification to the extent specified herein:

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Commercial Item Descriptions as outlined under General Information in the Index of Federal Specifications and Standards. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the General Services Administration, Specifications Unit (WFSIS), 7th and D Street SW, Washington, DC 20407.)

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:48Z
Check the source to verify that this is the current version before use.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Commercial Item Descriptions and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Federal Specification:

PPP-P-40 - Packaging and Packing of Hand Tools

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from Naval Publications and Forms Center, 5801 Tabor Avenue, Philadelphia, PA 19120.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids, or request for proposal shall apply:

American National Standards Institute (ANSI) Standard.

ANSI B46.1 - Surface Texture (Surface Roughness, Waviness and Lay)

(Application for copies should be addressed to the American National Standards Institute, 1430 Broadway, New York, NY 10018.)

3. REQUIREMENTS

3.1 Illustrations. The illustrations herein are descriptive and not restrictive and are not intended to preclude the purchase of gages otherwise conforming to this specification.

3.2 Material. Unless otherwise specified, the materials used in construction of the gages shall be tool steel, alloy tool steel, carbon steel, or stainless steel (see 3.6).

3.3 Finish. All finished exterior surfaces of gages shall be such that surface roughness lies within the limits of 8 to 63 microinches roughness height rating.

3.4 Identification marking. Each gage shall be marked in a permanent and legible manner with the manufacturer's name or with a trademark of such known character that the source of manufacture may be readily determined, with the manufacturer's catalog or other identifying number, and the country of origin.

3.5 Heat treatment. All gages shall be heat treated in such a manner as to obtain the best overall characteristics of the steel used, and shall be stable after final heat treatment.

3.6 Hardness. Gages shall be either hardened to 58 to 65 on the Rockwell C scale, or case-hardened (0.005-inch minimum depth) to 88 to 93 on the Rockwell 15 N superficial scale.

3.7 Temperature. The dimensions of the gages shall be within the limits specified herein at a temperature of 68 degrees Fahrenheit (F) [20 degrees Celsius (C)].

3.8 Tolerance of overall dimensions. All dimensions referred to herein as approximate shall be interpreted as permitting a tolerance of plus or minus 10 percent on the specified dimensions herein.

3.9 Gaging sections. The gaging sections shall consist of slots having parallel surfaces, cut in the outer edge of the gage, or cylindrical holes in the gage, as specified hereinafter to correspond in width to thickness of sheet or diameter of wire as shown in table I, and to correspond to fractional and letter sizes as shown in table II. Slots shall be flat and parallel and holes shall be round and straight within the tolerances specified in table III. Width of slots shall not overlap, e.g., a size number 32 shall not be larger than a size number 31. Gages

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:48Z
Check the source to verify that this is the current version before use.

having slots shall have a circular clearance hole at the inner end which is larger in diameter than the width of slot. All gaging slots shall terminate in the clearance holes in such manner that when a flat piece of stock (or feeler gage) of the proper thickness is inserted through the slot and "bottoms" in the hole, there shall be visual convexed clearance opening on each side of the flat stock (or feeler gage).

3.10 Type I, circular gages. Type I gages shall be circular in shape. The gaging sections shall be slots cut in the periphery. The gage number corresponding to the proper thickness or diameter shall be plainly marked on the side showing the name of the gage and the reverse side of the gage shall be plainly marked with corresponding decimal equivalents, designated by at least a three decimal figure in accordance with the manufacturer's commercial practice. The gages shall be approximately 3-1/4 inches in diameter, not less than 0.090-inch thick, and shall have a hole approximately 1 inch in diameter in the center. Marking shall be permanent and clearly legible and shall have a minimum depth of 0.002 inch. A decalcomania, painting, stenciling or other similar marking that would be subject to wearing off is not acceptable.

3.10.1 Class 1, United States standard for sheet and plate iron, steel, and wrought iron. The gaging sections shall correspond to the thicknesses which are equivalent to the weights of sheet or plate wrought iron from gage number 0 to 36, in accordance with table I (see 6.3). The class 1 gages shall be similar to figure 1.

3.10.2 Class 2, steel wire gage. The gaging sections of class 2 gages shall correspond to the diameters of wire from gage number 0 to 36 in accordance with table I. The class 2 gages shall be similar to figure 1.

3.10.3 Class 3, American wire gage. The gaging sections of class 3 gages shall correspond to the diameters of wire or thicknesses of nonferrous sheets for gage number 0 to 36, in accordance with table I. The class 3 gages shall be similar to figure 1.

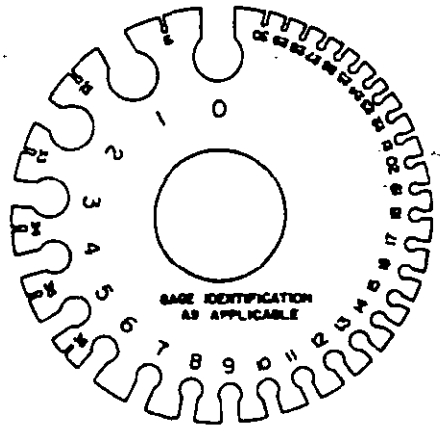


FIGURE 1. Type I, classes 1, 2, and 3 gages, circular; United States standard for sheet and plate iron, steel, and wrought iron; steel wire; and American wire.

3.10.4 Class 4, Birmingham wire gage. The gaging sections of class 4 gages shall correspond to the diameters or thicknesses from gage number 1 to 36, in accordance with table I. The class 4 gages shall be similar to figure 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:48Z
Check the source to verify that this is the current version before use.

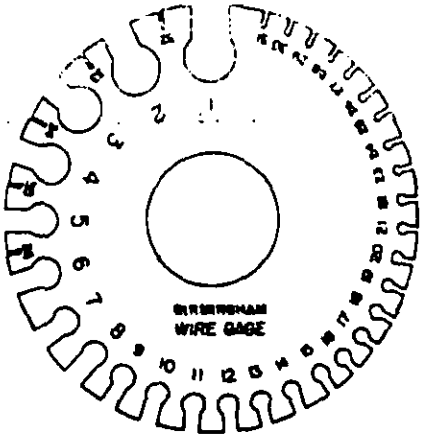


FIGURE 2. Type I, class 4, gage, circular, Birmingham wire.

3.10.5 Class 5, music wire gage. The gaging sections shall correspond to the diameters of wire from gage number 000000 to 33, in accordance with table I. The gages shall be similar to figure 3.

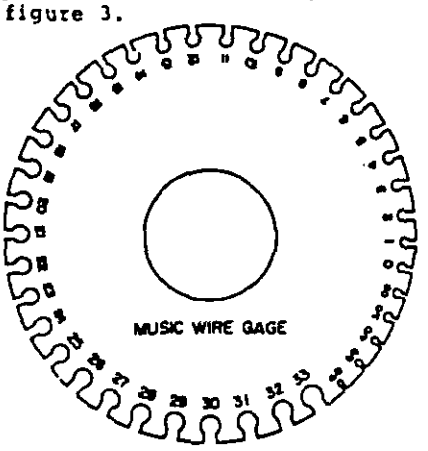


FIGURE 3. Type I, class 5 gage, circular music wire.

3.11 Type II, rectangular gages. Type II gages shall be rectangular in shape.

3.11.1 Class 1, United States standard for sheet and plate iron, steel and wrought iron. The gaging sections shall be slots cut in the longitudinal sides, and shall correspond to the thicknesses which are equivalent to the weights of sheet or plate wrought iron from gage number 000 to 25, in accordance with table I (see 6.3). The gage number corresponding to the proper thickness of sheet or plate shall be plainly stamped on the side showing the name of the gage, and the reverse side of the gage shall be plainly stamped with the corresponding decimal equivalents, designated by at least a three decimal figure in accordance with the manufacturer's commercial practice. Gages shall be approximately 5-1/2 inches long, 1-7/16 inches wide, not less than 0.170-inch thick, and shall be similar to figure 4.




FIGURE 4. Type II, class 1 gage, rectangular, United States standard for sheet and plate iron, steel, and wrought iron.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:48Z
Check the source to verify that this is the current version before use.

3.11.2 Class 2, twist-drill and drill rod gage.

3.11.2.1 Style A, large (size number 1 to number 60). The gaging sections shall be four rows of holes and shall correspond to diameters of twist drills and drill rod from number 1 to 60, inclusive, in accordance with table I. The gage numbers corresponding to the proper diameter of the drill or drill rod shall be plainly stamped opposite each hole and either side of the gage shall be neatly and uniformly marked near each hole with the corresponding decimal equivalents, designated by at least a three decimal figure in accordance with the manufacturer's commercial practice. The gages shall be approximately 5-1/2 inches long, 1-1/2 inches wide, not less than 0.070 inch thick, and shall be similar to figure 5.

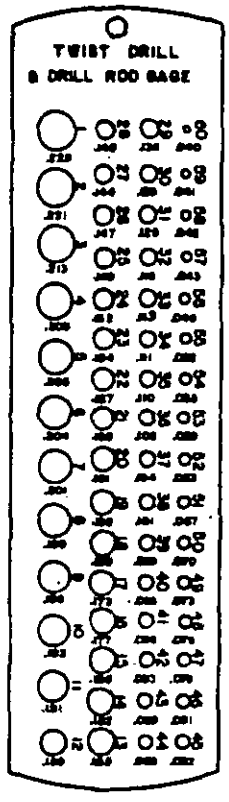


FIGURE 5. Type II, class 2, style A gage, rectangular twist drill and drill rod, large size.

3.11.2.2. Style B, small size (number 61 to number 80). The gaging section shall have two rows of holes which correspond to the diameter of twist drills and drill rod in sizes from number 61 to 80, inclusive, in accordance with table I. The nominal drill size corresponding to the proper diameter of the drill shall be plainly stamped close to the hole. The gage shall be approximately 2 inches long, 3/4-inch wide, not less than 0.056-inch thick, and shall be similar to figure 6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:48Z
Check the source to verify that this is the current version before use.

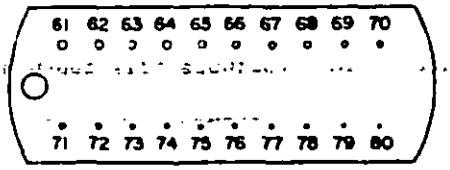


FIGURE 6. Type II, class 2, style B gage, rectangular twist drill and drill rod, small size.

3.11.2.3 Style C, decimal sizes 1/16 to 1/2 inch, inclusive. The gaging section shall be three rows of holes whose diameters shall correspond to the diameters of twist drills from 1/16 to 1/2 inch in accordance with table II. The nominal drill size corresponding to the proper diameter of the drill shall be plainly stamped opposite each hole, and the proper decimal equivalent shall be plainly stamped beneath each hole. The corresponding decimal equivalents shall be designated by at least a three decimal figure in accordance with the manufacturer's commercial practice. The gages shall be approximately 6-1/4 inches long, 2-5/16 inches wide, at least 0.070-inch thick, and shall be similar to figure 7.

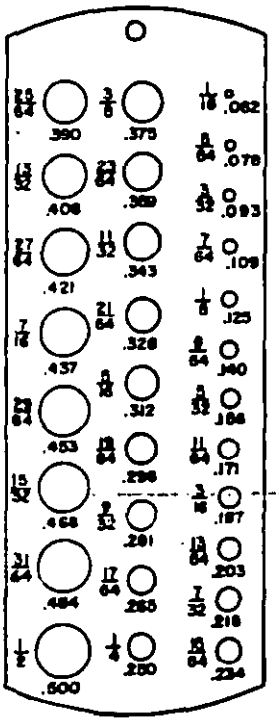


FIGURE 7. Type II, class 2, style C gage, twist drill, fractional sizes.

3.11.2.4 Style D, letter size A to Z, inclusive. The gaging section shall be three rows of holes whose diameters shall correspond to the diameters of twist drills from letter size A through Z in accordance with table II. The letter size corresponding to the proper diameter of the drill shall be plainly stamped opposite each hole and the proper decimal equivalent shall be stamped on either side near the hole. The corresponding decimal equivalents shall be designated by at least a three decimal figure in accordance with the manufacturer's commercial practice. The gages shall be approximately 6-1/4 inches long, 2-5/16 inches wide, not less than 0.070-inch thick, and shall be similar to figure 8.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:48Z
Check the source to verify that this is the current version before use.

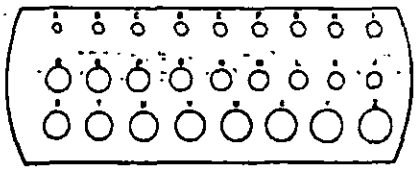


FIGURE 8. Type II, class 2, style D gage, twist drill, letter sizes.

3.11.3 Class 3, twist drill and machine screw tap gage. The gage shall be approximately 6-1/4 inches long, 2-7/16 inches wide, not less than 0.070-inch thick, and shall be similar to figure 9. The gaging section shall be four rows of holes which correspond to the diameters of twist drills from number 1 to 60, inclusive, in accordance with table I. The corresponding equivalents shall be designated by at least a three decimal figure in accordance with the manufacturer's commercial practice and marked near each hole. Gage shall also contain a table showing size of tap drill and body clearance drill in the following tap sizes.

2-56	4-40	6-32	10-24	14-20
2-64	4-48	6-40	10-32	14-24
3-48	5-40	8-32	12-24	1/4-20
3-56	5-44	8-36	12-28	1/4-28
4-36				

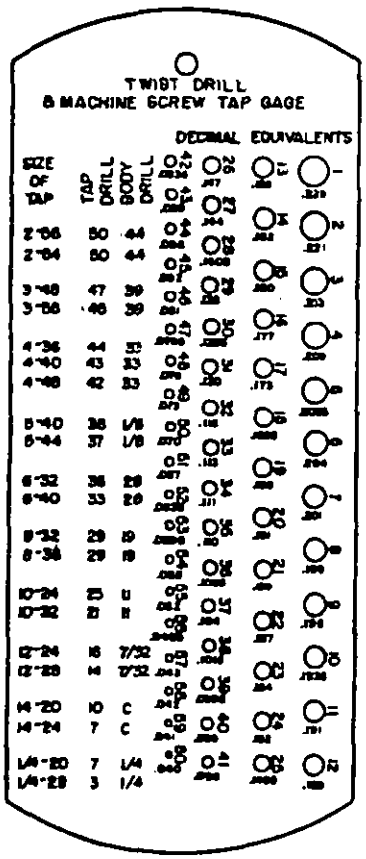


FIGURE 9. Type II, class 3 gage, twist drill and machine screw tap.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:48Z
Check the source to verify that this is the current version before use.

TABLE I. Thicknesses or diameters corresponding to gage numbers of sizes 1/.

Gage number or sizes	Types I and II, class 1 2/ Wrought iron	Steel sheets	Type I, class 2	Type I, class 3	Type I, class 4	Type I, class 5
	Inch	Inch	Inch	Inch	Inch	Inch
000000.....	--	--	--	--	--	0.004
00000.....	--	--	--	--	--	.005
0000.....	--	--	--	--	--	.006
000.....	0.3750	0.3586	--	--	--	.007
00.....	.3438	.3287	--	--	--	.008
0.....	.3125	.2989	0.3065	0.3249	--	.009
1.....	.2812	.2690	.2830	.2893	0.300	.010
2.....	.2656	.2540	.2625	.2576	.284	.011
3.....	.2500	.2391	.2437	.2294	.259	.012
4.....	.2344	.2242	.2253	.2043	.238	.013
5.....	.2188	.2092	.2070	.1819	.220	.014
6.....	.2031	.1943	.1920	.1620	.203	.016
7.....	.1875	.1793	.1770	.1443	.180	.018
8.....	.1719	.1644	.1620	.1285	.165	.020
9.....	.1562	.1495	.1483	.1144	.148	.022
10.....	.1406	.1345	.1350	.1019	.134	.024
11.....	.1250	.1196	.1205	.0907	.120	.026
12.....	.1094	.1046	.1055	.0808	.109	.029
13.....	.0938	.0897	.0915	.0720	.095	.031
14.....	.0781	.0747	.0800	.0641	.083	.033
15.....	.0703	.0673	.0720	.0571	.072	.035
16.....	.0625	.0598	.0625	.0508	.065	.037
17.....	.0562	.0538	.0540	.0453	.058	.039
18.....	.0500	.0478	.0475	.0403	.049	.041
19.....	.0438	.0418	.0410	.0359	.042	.043
20.....	.0375	.0359	.0348	.0320	.035	.045
21.....	.0344	.0329	.0317	.0285	.032	.047
22.....	.0312	.0299	.0286	.0253	.028	.049
23.....	.0281	.0269	.0258	.0226	.025	.051
24.....	.0250	.0239	.0230	.0201	.022	.055
25.....	.0219	.0209	.0204	.0179	.020	.059
26.....	.0188	.0179	.0181	.0159	.018	.063
27.....	.0172	.0164	.0173	.0142	.016	.067
28.....	.0156	.0149	.0162	.0126	.014	.071
29.....	.0141	.0135	.0150	.0113	.013	.075
30.....	.0125	.0120	.0140	.0100	.012	.080
31.....	.0109	.0105	.0132	.0089	.010	.085
32.....	.0102	.0097	.0128	.0080	.009	.090
33.....	.0094	.0090	.0118	.0071	.008	.095
34.....	.0086	.0082	.0104	.0063	.007	--
35.....	.0078	.0075	.0095	.0056	.005	--
36.....	.0070	.0067	.0090	.0050	.004	--

1/ This table is intended to cover only those sizes obtainable in commercial gages. See handbooks for complete gage tables.
2/ See 6.4

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:48Z
Check the source to verify that this is the current version before use.

TABLE I. Thicknesses or diameters corresponding to gage numbers of sizes 1/ - (cont'd)

Gage number or sizes	Type II, classes 2 and 3	Gage number	Type II, classes 2 and 3	Gage number	Type II, class 2, style B
	Inch		Inch		Inch
1.....	0.2280	--	--	--	--
2.....	.2210	37	0.1040	61	0.0390
3.....	.2130	38	.1015	62	.0380
4.....	.2090	--	--	63	.0370
5.....	.2055	--	--	64	.0360
6.....	.2040	--	--	65	.0350
7.....	.2010	39	.0995	66	.0330
8.....	.1990	40	.0980	67	.0320
9.....	.1960	41	.0960	68	.0310
10.....	.1935	42	.0935	69	.0292
11.....	.1910	43	.0890	70	.0280
12.....	.1890	44	.0860	71	.0260
13.....	.1850	45	.0820	72	.0250
14.....	.1820	46	.0810	73	.0240
15.....	.1800	47	.0785	74	.0225
16.....	.1770	48	.0760	75	.0210
17.....	.1730	49	.0730	76	.0200
18.....	.1695	50	.0700	77	.0180
19.....	.1660	51	.0670	78	.0160
20.....	.1610	52	.0635	79	.0145
21.....	.1590	53	.0595	80	.0135
22.....	.1570	54	.0550	--	--
23.....	.1540	55	.0520	--	--
24.....	.1520	56	.0465	--	--
25.....	.1495	57	.0430	--	--
26.....	.1470	58	.0420	--	--
27.....	.1440	59	.0410	--	--
28.....	.1405	60	.0400	--	--
29.....	.1360	--	--	--	--
30.....	.1285	--	--	--	--
31.....	.1200	--	--	--	--
32.....	.1160	--	--	--	--
33.....	.1130	--	--	--	--
34.....	.1110	--	--	--	--
35.....	.1100	--	--	--	--
36.....	.1065	--	--	--	--

1/ This table is intended to cover only those sizes obtainable in commercial gages. See standard handbooks for complete gage tables.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:48Z
Check the source to verify that this is the currenversion before use.

TABLE II. Diameters corresponding to fractional and letter size gages.

Nominal size	Type II, class 2, style C	Nominal letter	Type II, class 2, style D
	Inch		Inch
1/16	0.062	A	0.234
5/64	.078	B	.238
3/32	.093	C	.242
7/64	.104	D	.246
1/8	.125	E	.250
9/64	.140	F	.257
5/32	.156	G	.261
11/64	.171	H	.266
3/16	.187	I	.272
13/64	.203	J	.277
7/32	.218	K	.281
15/64	.234	L	.290
1/4	.250	M	.295
17/64	.265	N	.302
9/32	.281	O	.316
19/64	.296	P	.323
5/16	.312	Q	.332
21/64	.328	R	.339
11/32	.343	S	.348
23/64	.359	T	.358
3/8	.375	U	.368
25/64	.390	V	.377
13/32	.406	W	.386
27/64	.421	X	.397
7/16	.437	Y	.404
29/64	.453	Z	.413
15/32	.468	--	--
31/64	.484	--	--
1/2	.500	--	--

TABLE III. Tolerances for thickness or diameters corresponding to gage and drill numbers, letter, or fractional sizes.

Gage classification					Plus tolerance	Minus tolerance
Type	Class	Style	Gaging slots	Gaging holes	(inch)	(inch)
			0 to 20	--	0.0020	0.0015
I	1	--	21 to 30	--	.0020	.0015
			31 to 36	--	.0020	.0015
			0 to 20	--	.0020	.0015
I	2	--	21 to 26	--	.0020	.0015
			27 to 36	--	.0020	.0015
			0 to 20	--	.0020	.0015
I	3	--	21 to 26	--	.0020	.0015
			27 to 36	--	.0020	.0015
			0 to 20	--	.0020	.0015
I	4	--	21 to 29	--	.0020	.0015
			30 to 36	--	.0020	.0015
			6/0 to 4	--	.0020	.0015
I	5	--	5 to 23	--	.0020	.0015
			24 to 33	--	.0020	.0015
			3/0 to 20	--	.0020	.0015
II	1	--	21 to 25	--	.0020	.0015
II	2	A	--	1 to 60	.0010	.0000
II	2	B	--	61 to 80	.0010	.0000
II	2	C	--	1/16 to 1/2	.0015	.0000
II	2	D	--	A to Z	.0015	.0000
II	3	--	--	1 to 60	.0010	.0000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:48Z
Check the source to verify that this is the current version before use.

3.12. Special features. When gages with accuracy limits, scale graduations, or other features differing from those required by this specification are specified in the contract or purchase order, the gages shall conform to this specification insofar as applicable.

3.13 Workmanship. Workmanship shall be first class in every respect. The gages shall be free from rust, fins, burrs, blemished, flaws, and other defects which affect the appearance or which may affect the accuracy, serviceability, and durability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 Inspection of materials and components. In accordance with 4.1 above, the supplier is responsible for insuring that materials and components used were manufactured, tested, and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified herein, or, if none, in accordance with this specification.

4.2 Sampling for conformance. Sampling shall be performed in accordance with MIL-STD-105. Inspection levels and acceptable quality levels are furnished in table IV. Gages with 40 or less slots or holes; four slots/holes shall be examined. Gages with more than 40 slots or holes; eight slots/holes shall be examined. The slots/holes shall be selected in such a manner as to insure testing of all sizes slots/holes.

TABLE IV. Inspection levels and AQL's

Reference	Inspection	AQL
4.3 Visual examination	II	4.0
4.4 Dimensional examination	S4	2.5
4.5 Testing	S4	2.5

4.3. Visual examination. Each sample unit shall be examined for defects listed in table V. The acceptable quality level shall be expressed in terms of defects per hundred units.

TABLE V. Classification of defects.

Characteristics	Defects
Design	Type, class and style not as specified. Missing or incomplete operation.
Material	Not as specified.
Finish	Roughness not within limits specified.
Marking	Not marked as specified. Not legible. Not permanent.
Workmanship	Not as specified. Gage defaced or distorted. Any foreign substance on surface.

4.4 Dimensional examination. Each sample unit shall be examined for conformance. The acceptable quality level shall be expressed in terms of defects per hundred units.

4.5. Testing. Each sample selected shall be tested in accordance with 4.5.1, 4.5.2, and 4.5.3. The acceptable quality level shall be expressed in terms of percent defective.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:48Z
Check the source to verify that this is the current version before use.

4.5.1 Hardness test. Where practicable, hardness shall be determined from a minimum of three readings, taken at points representative of the hardness area or areas concerned. Any individual reading outside the range of hardness specified shall be cause for rejection. When necessary to determine hardness by other than the Rockwell method, the equivalent of the Rockwell number given shall apply.

4.5.2 Gaging dimensions. The gaging slots and holes shall be checked with suitable gages to determine size and parallelism of slots and diameters and roundness of holes (see 3.9 and table II). All dimensions shall be taken at standard temperature of 68 degrees F (20 degrees C).

4.5.3 Surface finish. Surface finish shall be determined in accordance with ANSI B46.1 (see 3.3).

4.6 Inspection of preparation for delivery requirements. An inspection shall be made to determine that the preservation, packaging, packing, and marking comply with the requirements in section 5 of this specification.

5. PREPARATION FOR DELIVERY

5.1 Preservation, packaging, packing, and marking. Preservation, packaging, packing, and marking shall be in accordance with PPP-P-40. The level of preservation, packaging, and packing shall be A, B, C, or as otherwise specified (see 6.2).

6. NOTES

6.1 Intended use. The gages covered by this specification are intended for use in identifying and classifying sheet steel, twist drills, drill rod, and wire by using the stamped information on the applicable gage. The gaging slots and holes are to be used only for approximate checking. For precision measurement, items so checked should be rechecked with micrometers or other precision measuring devices. The tolerances in table III are as liberal as can be permitted for approximate measuring devices and to the extent practicable will prevent overlapping of gage sizes.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Type, class, and style (see 1.2.1).
(c) If other gage is required. (see 3.2).
(d) Level of packaging and level of packing required (see 5.1).

6.3 The thickness given in column 2, table I for each gage number is calculated from the basic weight of wrought iron which is the United States Standard gage used in the manufacture of iron plate, bars, and other iron products, and is 40 pounds per square foot per inch in thickness. The thickness given in column 3, table I, for each gage number is in accordance with manufacturer's standard gage for steel sheets, and is based on 41.82 pounds per square foot per inch in thickness and represents standard mill practice.

6.4 The thickness given in column 2, table I, for each gage number is calculated from the weight per square foot of wrought iron sheet corresponding to that gage number. Since the density of steel is greater than that of wrought iron, the thickness of steel sheets corresponding to each gage number is slightly less than that of wrought iron sheets of the same gage number. The thicknesses of steel sheets are shown in column 3. Commercial gages of type I, class 1, and type II, class 1, are made to correspond to the thicknesses given in column 2 (wrought iron). As the gages specified herein are intended for use in the selection of material on the basis of thickness, gages corresponding to the thicknesses given in column 2 can be used for steel as well as wrought iron sheets without serious error. If used to determine the gage number of steel sheets which are light in weight, the result may be in error (too high) by one gage number. It is not considered to be necessary, however, to provide gages on the basis of the thicknesses given in column 3.

MILITARY INTERESTS:

NONE: DoD has determined that no military activity has an official interest in this Federal specification.

PREPARING ACTIVITY

GSA - FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:48Z
Check the source to verify that this is the current version before use.