MILITARY SPECIFICATION

COVER, FOXHOLE, OVERHEAD PROTECTION

This specification is approved for use by the USA Belvoir Research and Development Center, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a lightweight, small, easily carried cover to provide overhead protection for either one- or two-man foxholes and small crew-served weapon emplacements.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified (see 6.2), the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

L-P-377	- Plastic Film, Polyethylene Terephthalate.
L-P-378	- Plastic Sheet and Strip, Thin Gauge, Polyolefin.
L-P-1040	- Plastic Sheets and Strips (Polyvinyl Fluoride).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Belvoir Research and Development Center, ATTN: STRBE-DS, Fort Belvoir, VA 22060 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 4240

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

V-T-285	- Thread, Polyester.
TT-L-50	- Lacquer, Nitrocellulose, Acrylic and Acrylic-Butyrate, Aerosol (In Pressurized Dispensers).
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-636	- Boxes, Shipping, Fiberboard.

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods.
FED-STD-595	- Colors.
FED-STD-751	- Stitches, Seams, and Stitching.

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-1188	- Commercial Packaging of Supplies and Equipment.
MIL-STD-45662	- Calibration Systems Requirements.
MS27980	- Fasteners, Snap, Style 2 (Regular Wire Spring Clamp Type).

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ANSI/ASTM D523 - Standard Test Method for Spectral Gloss.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Description. The foxhole covers shall be in accordance with figures 1 and 2 and as specified herein. The cover shall be capable of providing overhead cover for either one- or two-man foxholes.

3.1.1 Figures. Figures 1 and 2 are not intended for use as shop drawings. Critical dimensions and tolerances are furnished; however, the contractor is responsible for preparing his own shop drawings and for providing tolerances in accordance with industry standards for similar equipment where the tolerances are not specified in figures 1 and 2. Where tolerances could cumulatively result in incorrect fits, the contractor shall provide tolerances within those prescribed on the figures to insure correct fit, assembly and operation of the covers.

3.2 First article. When specified (see 6.2), samples shall be subjected to first article inspection (see 4.4 and 6.3).

3.3 Material. Material shall be as specified herein. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification (see 6.4).

3.3.1 Cover materials. When tested as specified in 4.6.2.1, materials shall be fungi resistant.

3.3.1.1 Base fabric. The base fabric shall be a polyester cloth and shall be as specified in table I.

TABLE I. Base fabric.

Weight, oz/sq yd	3.3 ± 0.3
Thread count, W X F, per inch	52 ± 2 X 52 ± 2
Tear strength, W X F, lbs	Min 15 X 15
Breaking strength, W X F, lbs/in	Min 152 X 152

3.3.1.1.1 Color. The color of the base fabric shall be not darker than 34052 nor lighter than 34086 as specified in FED-STD-595.

3.3.1.1.2 Gloss. The gloss of the base fabric shall be not more than two gloss units at 60 degrees incidence as specified in ANSI/ASTM D523.

3.3.1.2 Laminated fabric. The base fabric shall be laminated with a film of type I polyester specified in L-P-377, or type 2, grade A, class 1 polyvinyl fluoride specified in L-P-1040 on one side only to provide resistance to water and chemical warfare agents. The laminated fabrics shall conform to table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

TABLE II. Laminated fabric.

Weight, oz/sq yd	Max 4.5
Thread count, W X F, per inch	Max 54 X 54
Bursting strength, gross lbs. 1/	Min 440
Tear strength, W X F, lbs	Min 12 X 12
Breaking strength, W X F, lbs/in	Min 165 X 165
Adhesion, lb/in	Min 1.7

1/ Gross bursting strength (lb) = gauge burst pressure (psi) x area of coaxial aperture of the metal clamps (square inches).

3.3.1.3 Thread. The thread shall be type I, class 1, size E, subclass B polyester in accordance with V-T-285. The thread color shall correspond with cover color specified in 3.3.1.1.1.

3.3.1.4 Stitching. Stitching shall be in accordance with FED-STD-751, type 301, 8-10 stitches per inch.

3.3.1.5 Snap fasteners. The fasteners shall conform to MS27980, dash Nos. 6B and 26B. The fasteners shall be located along the nonsleeved edges, as specified in figures 1 and 2, male along one edge, female along the other, so that two or more covers can be joined for installation over a larger personnel shelter.

3.3.1.6 Stencil. The stenciling on the cover shall be a flat black lacquer, nitrocellulose and acrylic high solids, hydrocarbon propellant, in accordance with TT-L-50.

3.4 Size, weight, and volume. The finished cover shall be of the size specified in figure 1, with a sleeve approximately 6 inches in diameter running along each of the two shorter sides. The cover shall weigh not more than 2 pounds, and the volume shall be not more than 1/10 of a cubic foot.

3.5 Static loads. When installed in accordance with figures 3 and 4, steps 1 thru 4, for load requirements specified in "a" and "b" and figure 4, step 5 for load requirements specified in "c", the covers shall not have a vertical sag of more than 12 inches over more than one-third of the covered area of the foxhole, or a vertical sag of more than 24 inches at any point over the covered areas of the foxhole when the following static loads of uncompacted soil are applied for a period of not less than one week:

a. A uniform depth of 36 inches, over a span of 30 inches wide, and a total length of 5 feet.
b. A uniform depth of 6 inches, over a span of 48 inches wide, and a total length of 5 feet.
c. A uniform depth of 36 inches, over a span of 30 inches wide, when multiple covers are connected over a trench.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

3.6 Performance and storage temperature. The cover shall be capable of being installed over a foxhole at temperatures ranging from -25° F to 100° F, and of being stored at temperatures ranging from -65° F to +160° F without evidence of any of the following:

a. Change in length and width of cover of more than 1/2 inch.
b. Color changed or uneven over entire cover.
c. Coating integrity not maintained.
   (1) Adhesion of coating to base material not maintained over entire cover.
   (2) Visible cracks in coating.
   (3) Wrinkles in coating other than at folds.
d. Snap attachment not firm with separation or tears being evident.
e. Seams not flat (puckered) and pliable.
f. Threads broken or frayed.
g. Base material integrity not maintained, cracks or frayed areas.
h. Any evidence of bonding from one layer of fabric to another as cover is unfolded.
i. Stretching of base material or seams.
j. Base material not flexible or easily unfolded.

3.7 Instruction sheet. An instruction sheet, in accordance with figures 3 and 4 covering installation procedures, shall be furnished with each foxhole cover. The instructions shall be printed in white on a non-glossy background of color corresponding to the color of the cover (see 3.3.1.1.1). The paper shall have a minimum weight of 75 g/m^2.

3.8 Carrying bag. A carrying bag shall be furnished with each foxhole cover. The material for the bag shall be as specified in L-P-378, type I, class 1 with a thickness of not less than 0.004 inches.

3.9 Sealing of carrying bag. Each foxhole cover, folded and rolled in accordance with steps 1, 2 and 3 of figure 5, and the instruction sheet (see 3.7) wrapped around the rolled cover in accordance with step 4, of figure 5, with the entire instructions for step 1 of figure 3 visible, shall be positioned as a unit inside the carrying bag (see 3.8 and views A, B and C and step 5 of figure 5). The carrying bag shall then be heatsealed in accordance with step 5 and view C (1) - first heat seal - on figure 5. A belt loop shall then be formed in the bag and heatsealed in accordance with step 6 and view C (2) - second heat seal - on figure 5. The heat seal for the belt loop shall support a 15 pound dead weight for 5 minutes without separation or ripping when tested as specified in 4.6.2.6.

3.10 Workmanship. Covers shall be free of holes, tears, punctures, or any other defects which may affect serviceability. Covers shall be flexible and not tacky to the touch, and shall be uniform in appearance and color. Stitching shall be straight and even. The belt loop in the carrying bag shall be straight and even so that the bag will hang vertically.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS.

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications, standards and figures, as applicable.

4.1.2 Calibration. The contractor shall maintain a calibration system in accordance with MIL-STD-45662 for the performance of all inspectior and test requirements as specified herein.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Material inspection (see 4.3).
b. First article inspection (see 4.4).
c. Quality conformance inspection (see 4.5).
d. Inspection of packaging (see 4.7).

4.3 Material inspection. Material inspection shall be performed before the material is fabricated into covers. A lot of uncoated material shall consist of all material manufactured from the same raw materials, the same processes and the same production run and offered for acceptance at one time. A lot of laminated fabric shall consist of all material from the same uncoated material lot that is laminated utilizing the same bonding materials and processes, the same coating material, and produced during the same production run and delivered for acceptance at one time.

4.3.1 Material samples. The material lot (see 4.3) shall be expressed in yards and the sample size shall be as follows:

Lot Size (yards)	Sample Size
2400 or less	2
2401 up to and including 24,000	4
24,001 and over	6

The samples shall be continuous yardage of sufficient size to perform all tests at one time. Not more than one sample shall be taken from any roll of material unless the lot consists of only one roll.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:09Z
Check the source to verify that this is the currentversion before use.

4.3.2 Test. The material shall be tested as specified in 4.6.2.1. Failure of any test shall be cause for rejection.

4.4 First article inspection.

4.4.1 Sampling. Sampling for examination and tests shall consist of the first eight complete foxhole covers in carrying bags.

4.4.2 Examination. Four covers and bags shall be examined as specified in 4.6.1. Presence of one or more defects shall be cause for rejection.

4.4.3 Tests. The four sample covers specified in 4.4.2 shall be tested as specified in 4.6.2.2, 4.6.2.3 and 4.6.2.4. The remaining four covers and bags shall be tested as specified in 4.6.2.6 and then tested as specified in 4.6.2.5. Failure of any test shall be cause for rejection.

4.5 Quality conformance inspection.

4.5.1 Lot. The lot for the purpose of inspection shall consist of all completely fabricated foxhole covers and carrying bags which have been fabricated from the same lot of component materials offered for delivery at one time except that the maximum lot size shall not exceed 400 completely fabricated covers or three days production of covers, whichever is the larger. Any change of supplier, manufacturing process, or material will require formation of a new lot for inspection.

4.5.2 Examination.

4.5.2.1 Sampling. Sampling for examination shall be in accordance with MIL-STD-105, inspection level II.

4.5.2.2 Samples. Samples selected in accordance with 4.5.2.1 shall be examined for the defects specified in 4.6.1. Acceptable Quality Level (AQL) shall be 1.0 percent defective for major defects and 4.0 percent defective for minor defects.

4.5.3 Tests.

4.5.3.1 Sampling.

4.5.3.1.1 Covers. Eight covers shall be selected at random from each lot as specified in 4.5.1 and each cover shall be labeled A through H as appropriate for subsequent identification of each cover.

4.5.3.1.2 Carrying bag. Sampling shall be in accordance with MIL-STD-105, inspection level S-2.

4.5.3.2 Samples.

4.5.3.2.1 Covers. Four of the covers selected in accordance with 4.5.3.1.1 shall be tested as specified in 4.6.2.2, 4.6.2.3 and 4.6.2.4. The remaining

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

four covers shall be tested as specified in 4.6.2.5. Failure of any test shall be cause for rejection.

4.5.3.2.2 Carrying bag. Samples selected in accordance with 4.5.3.1.2 shall be tested as specified in 4.6.2.6. AQL shall be 2.5 percent defective. One complete foxhole cover sealed within the carrying bag as specified in 3.9 shall be the unit of product.

4.6 Inspection procedure.

4.6.1 Examination. The covers shall be examined as specified herein for the following defects:

Major

101. Material not as specified.
102. More than one component missing per cover.
103. Stitches broken, skipped or missing.
104. Seams not as specified, i.e. incorrect seam type.
105. Stitches per inch not within the specified range.
106. Color of cover/components not as specified.
107. Adhesion of coating film to base fabric not as specified.
108. Dimensions not as specified.
109. Patched or mended fabric.
110. Carrying bag not as specified.
111. Workmanship not as specified, i.e. seam puckering sufficient to distort covers.

Minor

201. One component missing per cover.
202. Marking on covers not as specified or missing.

4.6.2 Tests.

4.6.2.1 Material. Subject the material to the tests specified in table III and 4.6.2.1.1. Nonconformance to 3.3 shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

TABLE III. Material tests.

Characteristic	FED-STD-191	Results to nearest
Fungi resistance 1/	5762	N/A
Weight	5041	0.1 ounce/sq. yard
Bursting strength	5122	Scale division on pressure gage
Tear strength	5134	1.0 pound
Breaking strength (without lamination)	5104	1.0 pound
Breaking strength (laminated)	5102	1.0 pound
Adhesion	5970	0.1 pound/2 inch width

1/ Except that the specimens shall be prepared per method 5102 and the number of specimens reduced from 40 to 12. Leaching of specimens is not required.

4.6.2.1.1 Gloss. Gloss shall be measured in accordance with ANSI/ASTM D523. Nonconformance to 3.3.1.1.2 shall constitute failure of this test.

4.6.2.2 Weight. The covers shall be weighed on a calibrated scale. Nonconformance to 3.4 shall constitute failure of this test.

4.6.2.3 Volume. Determine the volume of each cover. Nonconformance to 3.4 shall constitute failure of this test.

4.6.2.4 Static loads. Using the covers selected in accordance with 4.5.3.1.1 and available soil, install cover A as shown in figure 3 over a foxhole having a span width of 30 inches and an open length not less than 5 feet. Hole depth shall be not less than 4 feet. Place uncompacted soil to a uniform depth of 36 inches over the covered foxhole as shown in figure 4, step 4. (The soil depth specified in figure 4, step 4 is for military use and is not to be used in this static load test). Connect covers B and C to form a continuous trench-type cover. Install this cover over a 4-feet deep trench having a 30-inch-wide span and an open length not less than 10 feet, (see figure 4, step 5). Place uncompacted soil to a uniform depth of 36 inches over the covered portion of the trench as shown in figure 4, step 4. Install cover D over a 4-feet deep foxhole having a span 48 inches and a length of not less than 5 feet. Place 6 inches of uncompacted soil on this installation. Hold each test installation for a period of 1 week. Record the vertical displacements of each cover at the end of the test period. The following shall constitute failure of this test:

a. Complete collapse of the foxhole cover.
b. Vertical sag of more than 12 inches over more than one-third of the covered area of the foxhole.
c. Vertical sag of more than 24 inches at any point over the covered area of the foxhole.
d. The snaps connecting covers B and C separate from each other, or separate or tear away from the covered material.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:09Z
Check the source to verify that this is the currentversion before use.

4.6.2.5 Extreme weather performance and storage. Using covers selected in accordance with 4.5.3.1.1 place covers E and F, folded as shown in figure 5, i their carrying bag in a test chamber at a temperature of -25° F, +5° F, -0° F for 9 hours ± 15 minutes. Then unpack and unfold the covers while still in the test chamber at the temperature of -25° F. Nonconformance to 3.6 shall constitute failure of this test. For a cycle test, place covers G and H folded as shown in figure 5 without their carrying bag in a test chamber. The chamber shall be maintained at a constant temperature level within the range 155° F to 160° F for 4 hours ± 15 minutes. The covers shall then be removed from the chamber and immediately unfolded and inspected. Remove and inspect one cover at a time. Nonconformance to 3.6 shall constitute failure of this test. Then refold the covers as shown in figure 5 and replace in the test chamber at a temperature of -65° F, +5° F -0° F for 16 hours ± 15 minutes. Remove the covers from the chamber and inspect one cover at a time. Nonconformance to 3.6 shall constitute failure of this test.

4.6.2.6 Carrying bag belt loop. The belt loop shall be tested in accordance with figure 6. Nonconformance to 3.9 shall constitute failure of this test.

4.7 Inspection of packaging.

4.7.1 Unit of product. A completed exterior container of foxhole covers ready for shipment shall be the unit of product.

4.7.2 Sampling. Sampling shall be in accordance with MIL-STD-105, inspection level II.

4.7.3 Examination. Prior to sealing of intermediate packs, samples selected in accordance with 4.7.2 shall be examined for defects 112, 113 and 114. After sealing of intermediate packs examine for defect 115. After completion of packing, examine for defects 116, 117 and 118. AQL shall be 2.5 percent defective.

112.	Materials and containers not as specified. Each incorrect material or container shall constitute a defect.
113.	Installation instructions not included with each foxhole cover.
114.	Foxhole cover not folded, rolled, positioned and sealed in carrying bag as specified.
115.	Foxhole covers not intermediate packed as specified for level A.
116.	Weight or quantity limitations not as specified for all degrees of packing.
117.	Strapping not as specified for level A.
118.	Marking, incorrect, illegible, or missing.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or commercial, as specified (see 6.2).

5.1.1 Level A. Twelve foxhole covers, each folded and rolled, wrapped in an instruction sheet and sealed in a carrying bag as specified in 3.9, shall be

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

placed in an intermediate container (box) conforming to PPP-B-636, type CF, class weather-resistant, grade W5c or better. Box closure shall be in accordance with the appendix to the box specification.

5.1.2 Commercial. Foxhole covers, folded and rolled, wrapped in instruction sheets and sealed in carrying bags as specified in 3.9, shall be preserved in accordance with MIL-STD-1188.

5.2 Packing. Packing shall be level A or commercial, as specified (see 6.2).

5.2.1 Level A. Foxhole covers, preserved as specified in 5.1, shall be packed in a box conforming to PPP-B-601, overseas type, style I. Gross weight of box shall not exceed 250 pounds. Box closure and strapping shall be as specified therein and in the appendix thereto except that strapping shall be flat and that finish shall be B.

5.2.2 Commercial. Foxhole covers, preserved as specified in 5.1, shall be packed in accordance with MIL-STD-1188. The quantity of covers in each shipping container shall not exceed 48.

5.3 Marking. Marking shall be level A or commercial, as specified (see 6.2).

5.3.1 Level A. In addition to any special or other identification marking required by the contract or purchase order (see 6.2), each shipping container shall be marked in accordance with MIL-STD-129.

5.3.2 Commercial. Commercial marking shall be in accordance with MIL-STD-1188.

6. NOTES

6.1 Intended use. Foxhole covers are intended to provide effective means with which the individual soldier can construct overhead cover for foxholes or small field fortifications within 30 minutes without the need for any other heavy construction materials.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.
b. Date of issue of DoDISS applicable and exceptions thereto (see 2.1.1).
c. Time frame for first article examination and testing (see 3.2).
d. Degree of preservation, degree of packing, and marking required (see 5.1, 5.2 and 5.3).
e. Any special marking required (see 5.3.1).

6.3 First article. When a first article inspection is required, the item will be tested and should be a first production item. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, test and approval of the first article.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:09Z
Check the source to verify that this is the currentversion before use.

6.4 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the specification (see 3.3).

6.5 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.


Custodian:
Army - ME

Review activity:
DLA - GS

Preparing activity:
Army - ME

Project 4240-A780

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

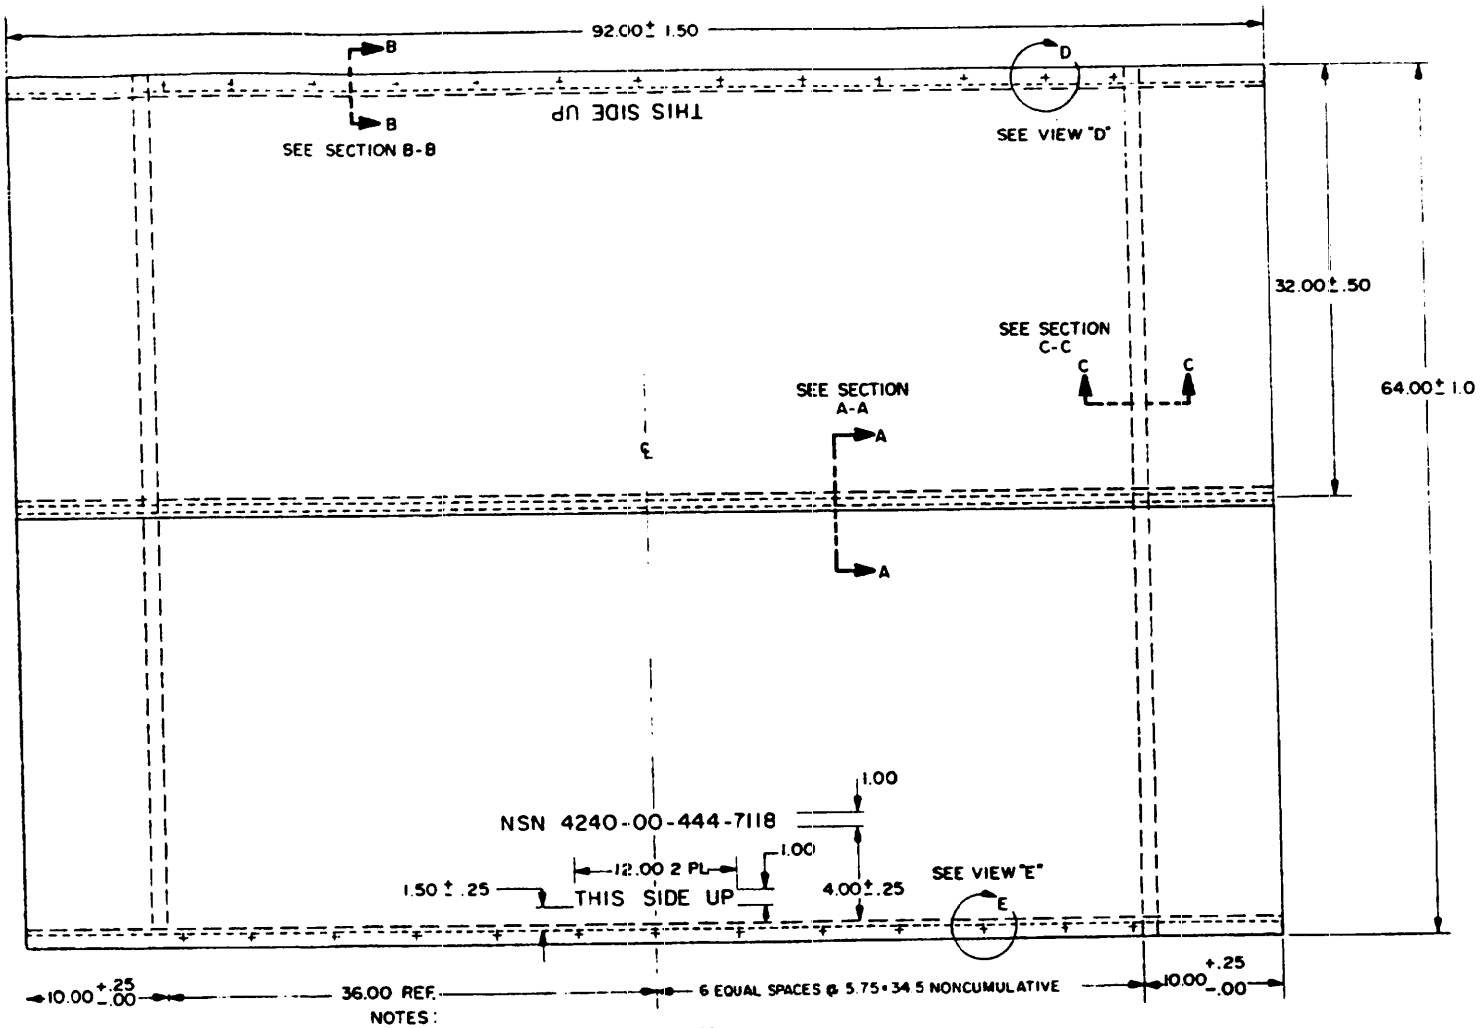


NOTES:
1. ALL DIMENSIONS ARE IN INCHES.
2. UNSPECIFIED TOLERANCES ARE ± .10.
3. FOR DETAILS OF SECTIONS AND VIEWS, SEE FIGURE 2.
4. CENTER OF MARKINGS TO BE WITHIN ± 1.0 OF CENTER LINE.
5. STITCHING NOT SHOWN.


FIGURE 1. Cover, overhead protection foxhole.

X-3193D


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

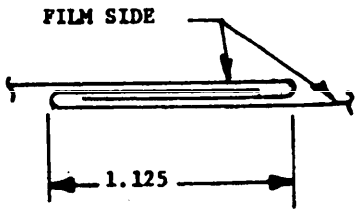


SECTION A-A
(CUT EDGE MATERIAL)
SEAM TYPE LSc-2
SEAM WITH SIZE E THREAD

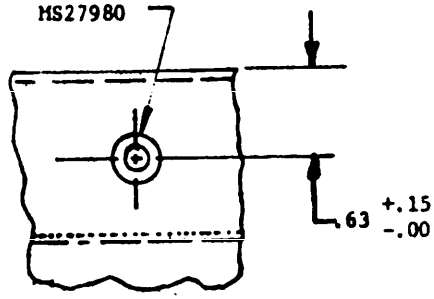


VIEW D

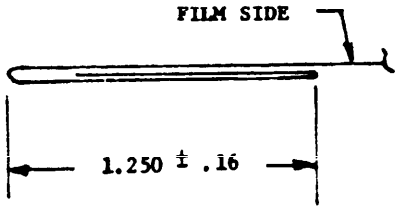

SECTION B-B
STITCHING TYPE EFb-1

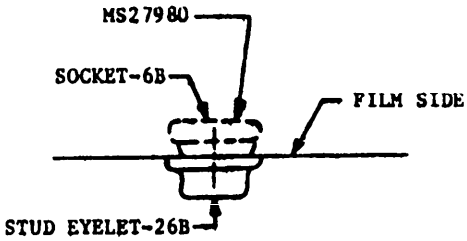

VIEW E

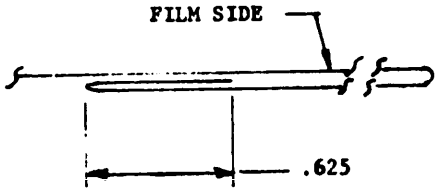

SECTION C-C
STITCHING TYPE EFb-2

NOTES:
1. ALL DIMENSIONS ARE IN INCHES
2. UNSPECIFIED TOLERANCES ARE ± .10
3. TYPES OF SEAMS AND STITCHING IN ACCORDANCE WITH FED-STD-751


FIGURE 2. Cover, overhead protection , foxhole.

X-3194D

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS FOR INSTALLING OVERHEAD COVER FOR FOXHOLES (OCF)

STEP 1

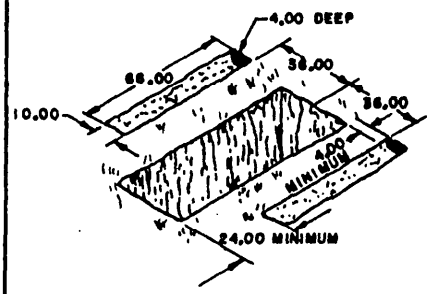

AFTER COMPLETING EXCAVATION OF THE FOXHOLE (TRENCH), UNFOLD THE COVER (OCF) AND PLACE IT OVER THE FOXHOLE, LOCATING THE SLEEVE AT EACH SIDE OF THE COVER IN A POSITION PARALLEL TO THE EDGE OF THE FOXHOLE. CENTER THE COVER SO THAT THE SLEEVES ARE APPROXIMATELY THE SAME DISTANCE FROM THE EDGE OF THE FOXHOLE.


ALLOW A MINIMUM OF 24 INCHES OF OPEN SPACE AT ONE END TO PERMIT ENTRANCE INTO FOXHOLE. BE SURE THAT THE COVER EXTENDS AT LEAST 4 INCHES BEYOND THE CLOSED END OF THE FOXHOLE. THIS WILL INSURE THAT SOIL DOESN'T SLIDE DOWN THE END WALL OF THE FOXHOLE.

MARK THE INSIDE (NEAREST FOXHOLE) EDGE OF THE SLEEVES IN THE SOIL ON BOTH SIDES OF THE TRENCH. USING THE MARKED LINES AS THE INSIDE EDGE, DIG TWO (ONE ON EACH SIDE) SHALLOW TRENCHES APPROXIMATELY 4 INCHES DEEP, 10 INCHES WIDE, AND 66 INCHES LONG PARALLEL TO THE LENGTH OF THE FOXHOLE.

11.00

STEP 2


USING ENTRENCHING TOOL, FILL ONE SLEEVE WITH SOIL USING BOTH ENDS AS FILLING POINTS. FILL OTHER SLEEVE IN THE SAME MANNER. STRETCH THE COVER TAUT BETWEEN THE TWO SLEEVES BECAUSE A TAUT COVER DOESN'T SAG AS MUCH AS A LOOSE COVER.



STEP 2 ALTERNATE:

WHERE SOIL CONDITIONS ARE FLUID, e.g., MUD AND VERY DRY SAND THE SLEEVES SHOULD BE FILLED WITH POLES OR LOGS, UP TO 5-INCH DIAMETER, INSTEAD OF SOIL TO PROVIDE SHAPE TO THE ANCHORING SLEEVE.

STEP 3

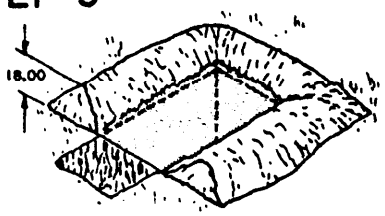

PLACE SOIL BACKFILL AROUND THE EDGES OF THE FOXHOLE TO A DEPTH OF 18 INCHES MINIMUM. THE SLOPING OUTSIDE SOIL EDGE SHOULD COVER THE SOIL FILLED SLEEVE.

8.50

NOTE:


ALL DIMENSIONS ARE IN INCHES

FIGURE 3. X-3195A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.


INSTRUCTIONS FOR INSTALLING OVERHEAD COVER FOR FOXHOLES (OCF)

STEP 4

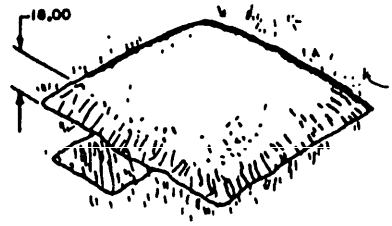

COMPLETE COVERING WITH SOIL TO A UNIFORM DEPTH OF 18 INCHES, BUT CONTINUE PLACING SOIL FROM THE EDGES TOWARD THE CENTER.

STEP 5 MULTIPLE INSTALLATION FOR TRENCHES

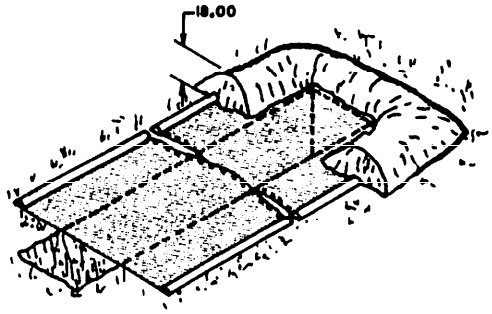

SNAP FASTENERS ON EACH END OF THE COVER PROVIDE MEANS OF COVERING A TRENCH BY CONNECTING TWO OR MORE COVERS. WHEN CONNECTING TWO OR MORE UNITS TOGETHER TO FORM A COVERED TRENCH TYPE STRUCTURE, IT IS ESSENTIAL THAT STEPS 1-3 SHOULD BE COMPLETED BEFORE CONNECTING SUCESSIVE UNITS. ANY TWO UNITS TO BE CONNECTED TOGETHER SHOULD BE CONNECTED WITH THE 5 MIDDLE SNAPS BEFORE THE SLEEVES OF THE SECOND ONE ARE FILLED WITH SOIL. AFTER THE SLEEVES ARE FILLED, THE 8 REMAINING SNAPS SHOULD BE CONNECTED. STEP 4 MAY BE COMPLETED BEFORE ALL COVERS ARE ERECTED OVER THE TRENCH BUT ONLY ON UNITS POSITIONED TWO OR MORE UNITS BACK FROM THE LAST ONE CONNECTED.

11.00


8.50

NOTE

ALL DIMENSIONS ARE IN INCHES

FIGURE 4. X-3196A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

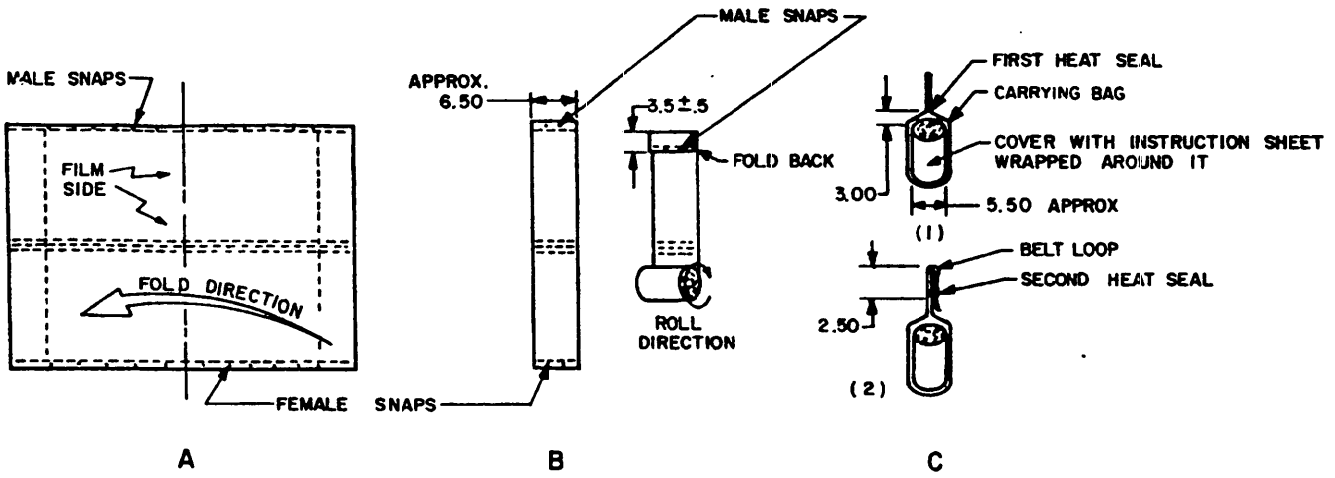

THE FOLLOWING ARE THE STEPS IN PACKAGING THE COVER:

1. WITH THE MALE SNAPS AT THE FAR SIDE, FOLD THE FLATTENED COVER IN HALF ALONG THE CENTERLINE AS SHOWN IN "A", WITH THE FILM SIDE ON THE INSIDE.
2. AFTER THE FIRST FOLD IN STEP 1, THE COVER IS THEN FOLDED THREE ADDITIONAL TIMES PARALLEL TO THE FIRST FOLD. EACH FOLD IS 1/2 THE WIDTH OF THE PREVIOUS FOLD. THE FINAL WIDTH IS APPROXIMATELY 6.50 INCHES.
3. FOLD THE END WITH THE MALE SNAPS AS SHOWN IN "B" SO THAT NO SNAPS WILL BE EXPOSED WHEN THE ROLL IS COMPLETED. THE COVER IS THEN TIGHTLY ROLLED STARTING FROM THE END WITH THE FEMALE SNAPS. THE ROLL SHOULD BE APPROXIMATELY 5.50 INCHES IN DIAMETER.
4. AFTER THE COVER IS ROLLED THE INSTRUCTION SHEET IS WRAPPED AROUND IT.
5. THE ROLLED COVER AND INSTRUCTION SHEET ARE PLACED IN A CARRYING BAG. THE BAG IS THEN HEAT SEALED AS SHOWN IN C(1).
6. A BELT LOOP IS FORMED AND THE SECOND HEAT SEAL IS ACCOMPLISHED AS SHOWN IN C(2).

FIGURE 5. Rolling and unit packing; foxhole cover.

X-2106D

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

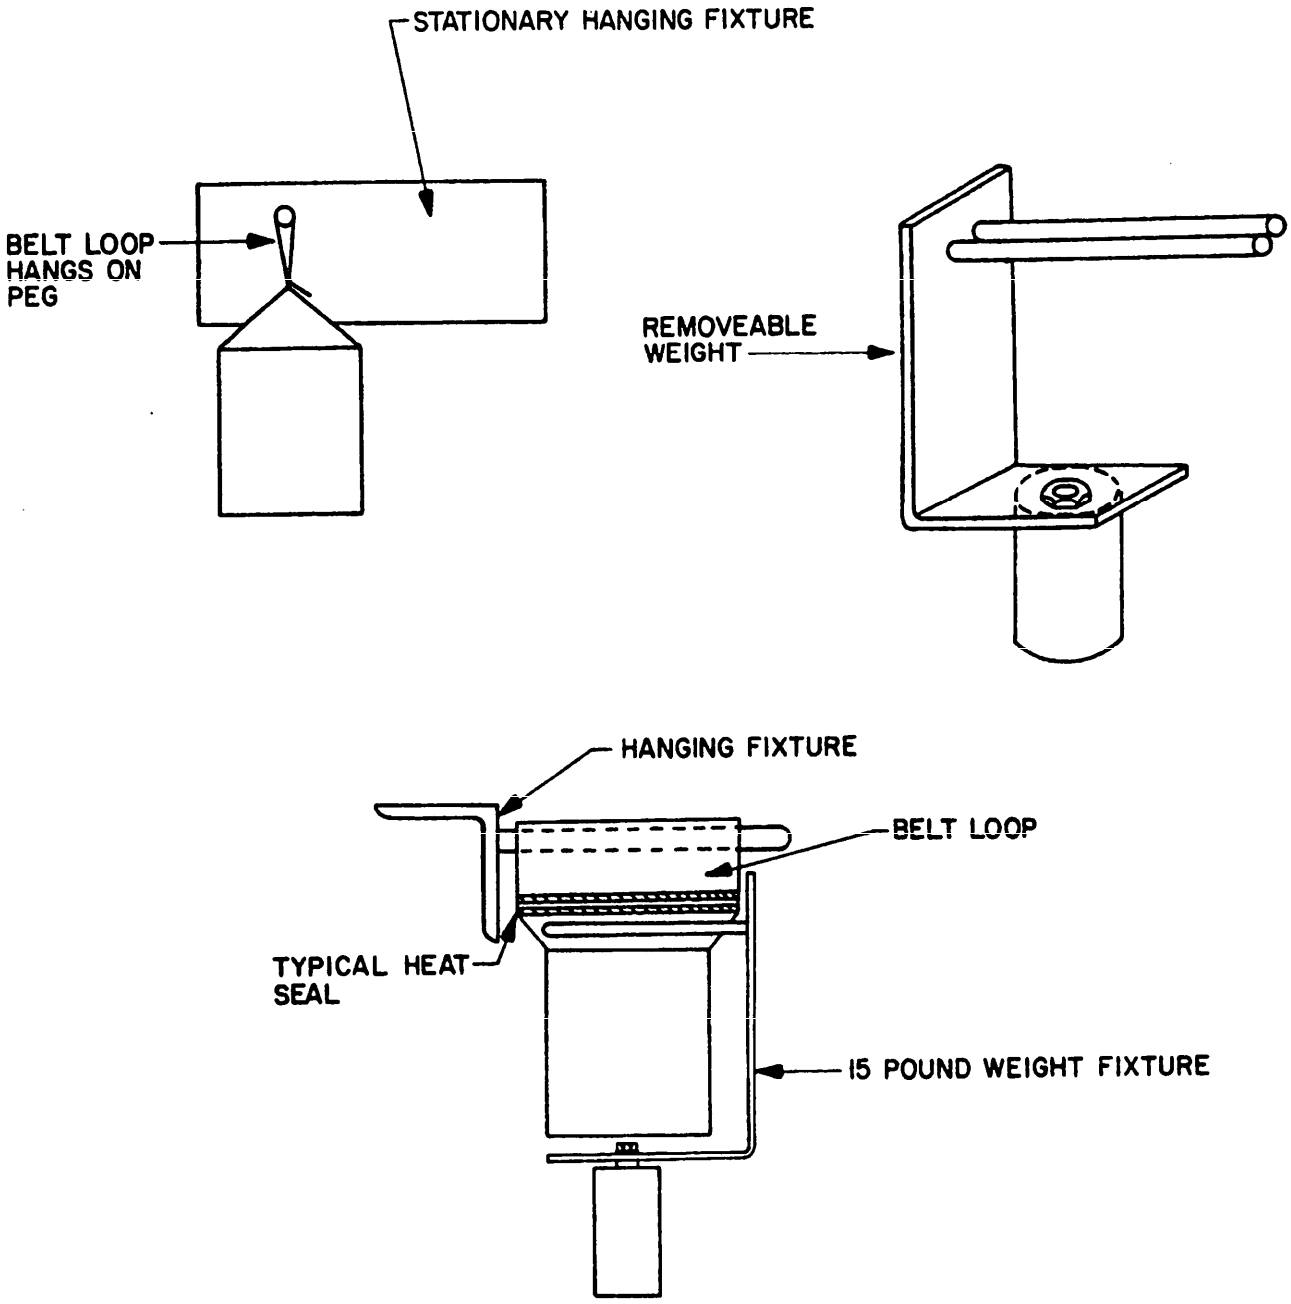


FIGURE 6. Heat-seal test fixture.

X-4094

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-52707D(ME)	Cover, Foxhole, Overhead Protection

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-0-20T04:09Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use submitting comments and suggestions for improvements. All users of military standardization documents are invited to prov suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretatio too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTA
NECESSA
IF MAILE
IN THE
UNITED STA

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Belvoir R&D Center
ATTN: STRBE-DS
Ft. Belvoir, VA 22060

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.