MIL-C-52765D(ME)
15 August 1985
SUPERSEDING
MIL-C-52765C(ME)
28 July 1982

MILITARY SPECIFICATION

CAMOUFLAGE SCREENING SUPPORT SYSTEMS

This specification is approved for use by the USA Belvoir Research and Development Center, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a support system complete with components and carrying case used with the woodland, snow, or desert lightweight synthetic camouflage screen system.

1.2 Classification. The camouflage support systems covered by this specification shall be the following classes, as specified (see 6.2):

Type I - Support system with aluminum pole.
Type II - Support system with plastic pole.
Subtype A - Support system with fiberglass reinforced plastic (FRP) batten spreader.
Subtype B - Support system with thermoplastic batten spreader.
Class 1 - Woodland/Desert
Class 2 - Snow

1.2.1 Individual components. When specified (see 6.2), the individual components shall be one or more of the assembly components specified in 3.1.2.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: USA Belvoir Research and Development Center, ATTN: STRBE-DS, Fort Belvoir, VA 22060-5606 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 1080

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

2.1.1 Specifications and standards. Unless otherwise specified, the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

L-P-378	- Plastic Sheet and Strip, Thin Gauge, Polyolefin.
QQ-S-781	- Strapping, Steel, and Seals.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-636	- Boxes, Shipping, Fiberboard.
PPP-S-760	- Strapping, Nonmetallic (and Connectors).

STANDARDS

FEDERAL

FED-STD-141	- Paint, Varnish, Lacquer, and Related Materials; Methods for Testing of.
FED-STD-595	- Colors.

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of US Military Property.

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

DRAWINGS

ME

13226E1232	- Resin, Thermoplastic, Polyethylene Terephthalate (PET).
13227E0131	- Cloth, Vinyl, Nylon.
13227E0132	- Pole, Aluminum, Support.
13227E0133	- Spreader Adapter Assembly.
13227E0134	- Pole, Plastic, Support.
13227E0135	- Batten, Spreader.
13227E0136	- Stake, Anchor, Class 1.
13227E0137	- Case, Carrying, Camouflage Screening Support Systems.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

13227E0140 - Resin, Thermoplastic, Polyphenylene Oxide, Plastic.
13227E0141 - Stake, Anchor, Class 2.

(Copies of specifications, standards, and drawings required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

B 557 - Tension Testing Wrought and Cast Aluminum and Magnesuim Alloy Products.
D 256 - Impact Resistance of Plastics and Electrical Insulating Materials.
D 790 - Flexural Properties of Plastics and Electrical Insulating Materials.
D 2412 - External Loading Properties of Plastic Pipe by Parallel-Plate Loading.
D 2584 - Ignition Loss of Cured Reinforced Resins.
D 3951 - Standard Practice for Commercial Packaging.
E 10 - Brinell Hardness of Metallic Materials, Test Methods for.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Industry association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Description. The camouflage screening support system shall be as shown on the drawings specified in 2.1.2 and as specified herein. The support system shall be provided in colors as specified in 3.7, 3.8 and 3.9.

3.1.1 Drawings. The drawings forming a part of this specification are end product drawings. No deviation from the prescribed dimensions or tolerances is permissible without prior approval of the contracting officer. Where tolerances could cumulatively result in incorrect fits, the contractor shall provide tolerances within those prescribed on the drawings to insure correct fit, assembly,

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

and operation of the camouflage screening support systems. Any data (e.g., shop drawings, layouts, flow sheets, processing procedures, etc.) prepared by the contractor or obtained from a vendor to support fabrication and manufacture of the production item shall be made available, upon request, for inspection by the contracting officer or designated representative.

3.1.2 Assembly. The support assembly shall consist of the following components, and shall have a total weight of not more than 70 pounds for class 1, and 85 pounds for class 2:

a. Support poles, 12 each (type I or type II).
b. Batten spreaders, 18 each (subtype A or subtype B).
c. Batten spreader adapters, 6 each.
d. Stakes, 18 each.
e. Case, 1 each.

3.2 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 4.3 and 6.3).

3.3 Material. Material shall be as specified herein and on the drawings. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification.

3.3.1 Material deterioration and control. The camouflage screening support systems shall be fabricated from compatible materials, inherently corrosion and deterioration resistant or treated to provide protection against the various forms of corrosion and deterioration that may be encountered in any of the applicable storage and operating environments to which the camouflage screening support system may be exposed.

3.3.1.1 Identification of materials and finishes. The contractor shall identify the specific material, material finish or treatment for use with components and subcomponents, and shall make information available, upon request, to the contracting officer or designated representative.

3.3.2 Recovered materials. For the purpose of this requirement, recovered materials are those materials which have been collected from solid waste and preprocessed to become a source of raw materials, as distinguished from virgin raw materials. The components, pieces and parts incorporated in the camouflage screening support system may be newly fabricated from recovered materials to the maximum extent practicable, provided the camouflage screening support system produced meets all other requirements of this specification. Used, rebuilt or remanufactured components, pieces and parts shall not be incorporated in the camouflage screening support system.

3.4 Support poles.

3.4.1 Aluminium poles for type I support system. Aluminum support poles shall conform to applicable drawings and as specified herein. Aluminum support poles shall be produced from aluminum tubing as specified on the applicable drawings, and shall meet the physical requirements specified in table I.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the current version before use.

TABLE I. Physical requirements of aluminum pole.

Property	Units	Requirements
Tensile strength	psi	40×10^3 min.
Yield strength	psi	35×10^3 min.
Elongation	%	8
Hardness	bhn	95*

* 500 gram - 10 mm diameter ball

3.4.1.1 Paint adhesion. When tested as specified in 4.5.2.1.1.2, the poles shall show no evidence of nonadhesion of paint of any area exceeding 1/8-inch average diameter, or more than one area exceeding 1/16-inch average diameter, or more than five areas of any diameter.

3.4.2 Plastic poles for type II support systems. Plastic support poles shall conform to applicable drawings and as specified herein.

3.4.2.1 Pole body. The plastic pole body material shall be as specified in the applicable drawings and shall meet the physical requirements as specified in table II.

TABLE II. Physical requirements of plastic support pole body.

Property		Units	Requirement
Flexural strength	dry	psi	40×10^3 min
	wet	psi	35×10^3 min
Flexural modulus	dry	psi	2.25×10^6 min
	wet	psi	2.00×10^6 min
Crush strength		lb/ft	1.6×10^3 min
Glass content		%	50 min

3.4.2.2 Plastic pole assembly. Connector and end reinforcements, when applicable, shall be permanently attached to the pole body. The method of attachment shall meet the requirements specified herein.

3.4.3 Support pole, type I and type II.

3.4.3.1 Column load. When tested as specified in 4.5.2.1.3.1, a 4-section pole shall support a 350-pound axial load for 60 seconds without evidence of cracking, failure of a joint section or rupture.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

3.4.3.2 Drop. When tested as specified in 4.5.2.1.3.2, the support poles shall sustain no damage which inhibits assembly or disassembly with a 1.568 OD/1.565 ID gauge. The type I support poles shall show no slippage of the sleeve into the pole body more than 1/4 inch. The type II support poles shall show no evidence of fiberglass fibers exposed or protruding out of resin, failure of the joint section, chips more than 1/4-inch deep, or cracks in the pole body. Cracks which only appear to be superficial shall be subjected to the column load test specified in 4.5.2.1.3.1 to establish conformance of the pole. The cracked joint shall be positioned near the center of the column.

3.5 Batten spreader.

3.5.1 Fiberglass reinforced plastic (FRP) batten spreader (subtype A). The FRP batten spreader shall conform to the applicable drawings and as specified herein. The color pigment for class 2 batten spreaders shall be a white paste or pigment and shall be added to the resin mix not more than 8 parts nor less than 1 part per hundred of the base resin.

3.5.2 Thermosplastic batten spreader (subtype B). The thermoplastic batten spreader shall conform to the applicable drawings, and as specified herein.

3.5.3 Batten spreader, subtype A and subtype B.

3.5.3.1 Stiffness and strength. When tested as specified in 4.5.2.2.1, the average deflection at 20 pounds shall be no less than 8 inches and not more than 13 inches, and no specimens shall break when loaded to 80 pounds. Breakage is defined as specimen rupture, i.e., a break typified by an abrupt change in specimen configuration.

3.5.3.2 Impact. When tested as specified in 4.5.2.2.2, the spreaders shall not crack or break. Surface chips and delamination at the location of impact are permissible providing they do not exceed an arc length of 2 inches or 1/2 inch form the edge.

3.5.3.3 Residual deflection. When tested as specified in 4.5.2.2.3, the highest point of residual deflection shall be not more than one inch between the flat surface and the bottom of the batten.

3.5.3.4 Conditioned impact. When tested as specified in 4.5.2.2.4, the batten spreaders shall not crack or break. Surface chips and delamination at the location of impact are permissible providing they do not exceed an arc length of 2 inches or 1/2 inch from the edge.

3.6 Batten spreader adapter. The batten spreader adapter shall conform to the applicable drawings, and shall meet the physical requirements specified in table III.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:10Z
Check the source to verify that this is the currentversion before use.

TABLE III. Physical requirements of batten spreader adapter.

Property	Units	Requirement
IZOD Impact (73° F)	ft-lbs/ins	5.0 min
(-40° F)	ft-lbs/ins	1.5 min
Flexural strength		
(dry)	psi	7,800 min
(wet)	psi	90% retention of dry strength
Flexural Modulus		
(dry)	psi	325,000 min
(wet)	psi	90% retention of dry modulus

3.7 Stakes. The anchor stakes shall conform to the applicable drawings. The color of the anchor stakes for class 1 support systems shall be in accordance with FED-STD-595, color No. 34079 and for class 2 color No. 37875.

3.8 Case. The case shall be as shown on the applicable drawings. The color of the case shall be in accordance with FED-STD-595, color No. 34087 for class 1, and color No. 37875 for class 2 support systems.

3.9 Treatment. The support poles, batten spreaders, and batten spreader adapter shall be treated during preparation with pigment to provide coloration. Colors shall be in accordance with FED-STD-595, color no. 34079 for class 1 and color no. 37722 to 37875 for class 2 support systems.

3.10 Reliability. When specified (see 6.2), the reliability for completing a mission of 672 test cycles shall be 0.94 when the camouflage screening support system is tested as specified in 4.5.3.

3.11 Identification marking. The support assembly case shall be identified in accordance with MIL-STD-130 as indicated on the drawings.

3.12 Workmanship. The finished items shall be clean, free of burrs and sharp edges, smoothly finished, shall not be broken or malformed, and shall conform to the standards specified in the appendix.

4. QUALITY ASSURANCE PROVISION

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).
c. Inspection of packaging (see 4.6).

4.3 First article inspection and testing.

4.3.1 Examination. The camouflage screening support systems shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.3.2 Tests. The camouflage screening support systems shall be tested as specified in 4.5.2. Failure of any test shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Unit of product. A unit of product for purpose of sampling shall be an assembly of the support system, or an individual component, as applicable.

4.4.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105, inspection level II. Sampling for tests shall be in accordance with MIL-STD-105, inspection level S-2.

4.4.3 Examination. Samples selected in accordance with 4.4.2 shall be examined for the defects specified in 4.5.1. AQL shall be 1.5 percent defective for major defects and 2.5 defective for minor defects.

4.4.4 Tests. Samples selected in accordance with 4.4.2 shall be tested as specified in 4.5.2 through 4.5.2.1.3 and 4.5.2.2 through 4.5.2.2.2. Failure of any test shall be cause for rejection.

4.5 Inspection procedure.

4.5.1 Examination. The camouflage screening support components shall be examined as specified herein for the following defects:

Major

101. Material not as specified.
102. Dimensions not as specified.
103. Weight of support system not as specified.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the current version before use.

104. Components missing, not as specified, or damaged.
105. Colors not as specified.
106. Construction of support poles not as specified.
107. Treatment not as specified.
108. Support poles do not fit together or disassemble as specified.
109. Spreader adapter nut and spreader adapter body are not compatible.
110. Spreader adapter nut does not lock batten spreaders in position.
111. Spreader adapter nut does not unlock by hand.
112. FRP batten spreaders with blisters or delaminations larger than 1/2-inch diameter, wrinkles, ripples, cracks, or loose fibers, or any other visible malformation which exceeds Government-approved visual acceptance standards for batten spreaders (see 6.5)
113. Thermoplastic batten spreaders with blisters or pores larger than 1/8-inch diameter, wrinkles, ripples, or cracks.
114. Any malformation which exceeds the standards specified in the appendix.
115. Materials are not resistant to corrosion or deterioration or treated to be made resistant to corrosion or deterioration for the applicable storage and operating environment.
116. Contractor does not have documentation available for identification of material, material finishes, or treatment.
117. Used, rebuilt, or remanufactured componets, pieces and parts incorporated in the camouflage screening support system.
118. Connector and end reinforcements, when applicable, not as specified.

Minor

201. Identification marking missing, incorrect, or illegible.
202. Workmanship not as specified.

4.5.2 Tests. Unless otherwise specified herein, test results for 4.5.2.1.1.1, 4.5.2.1.2.1, and 4.5.2.3 shall be the average of five specimens.

4.5.2.1 Support pole. The tests specified in 4.5.2.1.3.1 and 4.5.2.1.3.2 may be conducted in any order.

4.5.2.1.1 Aluminum pole.

4.5.2.1.1.1 Pole body and sleeve. This test shall be conducted only on every fifth sample. The pole body and sleeve shall be tested as specified in table IV. Nonconformance to 3.4.1 shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

TABLE IV. Test for physical requirement of aluminum pole.

Property	ASTM test method	Requirement paragraph
Tensile strength	B 557	3.4.1
Yield strength	B 557	3.4.1
Elongation	B 557	3.4.1
Hardness	E 10	3.4.1

4.5.2.1.1.2 Adhesion of paint. The pole shall be tested for adhesion of paint in accordance with FED-STD-141, method 6301.1. Nonconformance to 3.4.1.1 shall constitute failure of this test.

4.5.2.1.2 Plastic pole.

4.5.2.1.2.1 Pole body. This test shall be conducted only on every fifth sample. The pole body shall be tested as specified in table V. Nonconformance to 3.4.2.1 shall constitute failure of this test.

TABLE V. Test for physical requirements of plastic support pole body.

Property	ASTM test method	Requirement paragraph
Flexural strength*	D 790	3.4.2.1
Flexural modulus*	D 790	3.4.2.1
Crush strength	D 2412	3.4.2.1
Glass content	D 2584	3.4.2.1

*Note: Pole body, tested concave side up. Width measures as chord of arc. Measure wet strength within 12 hours after 3 hour boil, and after cooling for not less than 1 hour.

4.5.2.1.3 Support pole, type I and type II.

4.5.2.1.3.1 Column load. A 4-section pole shall be loaded as specified in figure 1 until the load specified in 3.4.3 is reached. Nonconformance to 3.4.3.1 shall constitute failure of this test.

4.5.2.1.3.2 Drop.

4.5.2.1.3.2.1 Single pole drop. The support pole shall be dropped vertically 10 times on each end onto a 3/4-inch thick steel plate laid flat from a height of 10 feet. The support pole shall be guided to a square impact with the steel

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the current version before use.

plate by a steel rod or pipe with OD selected to provide a 1/8-inch diametral clearance on the ID of the connector or sleeve. Nonconformance to 3.4.3.2 shall constitute failure of this test.

4.5.2.1.3.2.2 Pole assembly drop. A 4-section pole assembly, complete with three batten spreaders and adapter, shall be subjected to three drops 120 degrees apart onto a 3/4-inch thick steel plate laid flat on the ground as shown in figure 2. The pole shall be given an initial lean and released to direct each batten spreader into a square impact with the steel plate. The procedure shall be repeated four times, with each of the four poles located, in turn, at the top of the assembly. All components shall be assembled in their normal way of operation. Nonconformance to 3.4.3.2 shall constitute failure of this test.

4.5.2.2 Batten spreaders.

4.5.2.2.1 Stiffness and strength. The batten spreader shall be loaded to 20 pounds and the amount of deflection measured as shown in figure 3. After deflection is recorded, the batten spreader shall be loaded to 80 pounds for not less than 60 seconds. Nonconformance to 3.5.3.1 for either stiffness or strength shall constitute failure of this test.

4.5.2.2.2 Batten spreader impact test. The batten spreader shall be attached to a free falling weight by means of the spreader adapter body and nut. The test fixture shall be similar to figure 4, so that it will fall 6 feet and have an impact energy of not less than 120 foot pounds. The batten spreader shall be dropped onto a steel plate which allows the batten spreader to slide out and away from the test fixture. After being dropped, the batten spreader shall be removed and inspected. Nonconformance to 3.5.3.2 shall constitute failure of this test.

4.5.2.2.3 Residual deflection. The batten spreader shall be bowed not less than 10 inches, in a fixture similar to figure 5. The bowed batten spreader shall be conditioned at 140° F ±5° F (60° C ±3° C) for not less than six hours, and then allowed to cool at room temperature for not less than two hours while still being bowed. After the two hour cooling period, the batten spreader shall be removed from the fixture and placed on a flat surface with the extreme ends of the batten spreader resting on the flat surface. Nonconformance to 3.5.3.3 shall constitute failure of this test.

4.5.2.2.4 Conditioned impact. Condition the batten spreaders at -40° F ±5° F (-40° C ±3° C) and at that temperature subject the spreaders to the test specified in 4.5.2.2.2. Nonconformance to 3.5.3.4 shall constitute failure of this test.

4.5.2.3 Batten spreader adapter. Specimens of the material from which the batten spreader adapters are to be manufactured shall be tested as specified in table VI. Nonconformance to 3.6 shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

TABLE VI. Test for physical requirements of batten spreader adapter material.

Property	Condition	ASTM test method	Requirement paragraph
IZOD impact	73° F -40° F	D 256	3.6
Flexural strength (dry) (wet)	73° F 10 day soak at 150° F in distilled water	D 790	3.6
Flexural modulus (dry) (wet)	73° F 10 day soak at 150° F in distilled water	D 790	3.6

4.5.3 Reliability. Using the reliability specified in 3.10, the camouflage screening support system shall be tested as specified herein.

4.5.3.1 Failure definition. A failure is defined as any malfunction of the support system which the operator or crew cannot correct by repair or replacement action using on-equipment maintenance tools, available spares, or repair kit within 15 minutes and which cause or may cause:

a. Failure to commence operation, cessation of operation, or degradation of performance capability of system/subsystem below designated level.
b. Serious damage to system/subsystem by continued operation.
c. Serious personnel safety hazards.

4.5.3.2 Test procedure. For reliability purposes, a test cycle is defined as unpacking, erecting, utilizing a camouflage screen module, disassembly and repacking a single support system. A sample size of 6 support systems will be employed for 2 test cycles/day each for 56 days resulting in a total of 672 test cycles for each type of support system specified (see 1.2 and 6.2).

4.5.3.3 Failure criteria. Nonconformance to 3.10 shall constitute failure of this test.

4.6 Inspection of packaging.

4.6.1 First article pack inspection.

4.6.1.1 Examination. The first article pack shall be examined for the applicable defects in 4.6.2.3.1 and 4.6.2.3.2. The presence of one or more defects shall be cause for rejecting the first article pack.

4.6.2 Quality conformance inspection of packaging.

4.6.2.1 Unit of product.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the currentversion before use.

4.6.2.1.1 Camouflage support system assembly. For the purpose of inspection only, a completed unitized load of camouflage support system assemblies, that have been prepared for shipment, shall be considered an assembly unit of product.

4.6.2.1.2 Camouflage support system individual component. For the purpose of inspection only, a completed pack for a quantity of a single component, that has been prepared for shipment, shall be considered an individual component unit of product for that component. A completed pack for a quantity of any other single component that has been prepared for shipment, shall be similarly considered.

4.6.2.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.6.2.3 Examination. Samples selected in accordance with 4.6.2.2 shall be examined for the applicable defects listed in 4.6.2.3.1 and 4.6.2.3.2. AQL shall be 2.5 percent defective. Special note: Acceptance criteria for workmanship standards in packaging shall conform to 30.6 of the appendix and as referenced herein.

4.6.2.3.1 Camouflage support system assembly. Camouflage support system assemblies shall be examined for the following defects as specified for the different levels of packaging:

No.	Defect	A	B	Comm
119.	Components not positioned and contained within the furnished carrying case.	5.2.1.1	5.2.1.2	5.2.1.3
120.	Filled carrying case not placed inside polyethylene bag as specified.	5.2.1.1	5.2.1.2	
121.	Polyethylene bag not as specified.	5.2.1.1	5.2.1.2	
122.	Bag not compressed around carrying case by vacuum as specified.	5.2.1.1	5.2.1.2	
123.	Bag not properly heat sealed to retain vacuum (see 30.6.2).	5.2.1.1	5.2.1.2	
124.	Sealed bag containing the support system not placed in specified close-fitting box.	5.2.1.1	5.2.1.2	
125.	Close-fitting box not assembled and closed as specified (see 30.6.1 and 30.6.3).	5.2.1.1	5.2.1.2	
126.	Preserved camouflage support system assemblies not unitized in the quantity specified.	5.3.1.1		
127.	Pallet deckboards not as specified.	5.3.1.1.1.1		
128.	Pallet deckboards not positioned on top and bottom decks as specified.	5.3.1.1.1.1		

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the current version before use.

No.	Defect	A	B	Comm
129.	Pallet stringers not as specified.	5.3.1.1.1.2		
130.	Stringer fork entry notches not the size specified.	5.3.1.1.1.2		
131.	Stringer fork entry notches not positioned as specified.	5.3.1.1.1.2		
132.	Pallet size not within specified tolerance.	5.3.1.1.1.3		
133.	Cartons not strapped to pallet as specified (see 30.6.4).	5.3.1.1.2		
134.	Commercial packing not as specified.	5.3.1.2		
135.	Marking not as specified.	5.4.1	5.4.1	5.4.2

4.6.2.3.2 Camouflage support system individual component. Camouflage support system individual components shall be examined for the following defects as specified for the different levels of packaging:

No.	Defect	A	B	Comm
136.	Individual components not preserved as specified.	5.2.2.1	5.2.2.1	5.2.2.2
137.	Unlike components placed in same container.	5.2.2.1	5.2.2.1	5.2.2.2
138.	Gross weight of unit container not as specified.	5.2.2.1	5.2.2.1	
139.	Preserved components not packed as specified.	5.3.2.1		5.3.2.2
140.	Shipping container not as specified.	5.3.2.1		5.3.2.2
141.	Box closure and strapping not as specified.	5.3.2.1		
142.	Unlike components packed in a shipping container.	5.3.2.1		5.3.2.2
143.	Marking not as specified.	5.4.1	5.4.1	5.4.2

5. PACKAGING

5.1 First article pack. The contractor shall furnish a first article pack for examination within the time frame specified (see 6.2) to prove prior to starting production packaging that the applied preservation, packing, and marking comply with the packaging requirements of this specification. Examination shall be as specified in section 4 and shall be subject to surveillance and approval by the Government (see 6.6). The first article pack may be prepared utilizing either the first article model or a production camouflage screening support system. When the first article model is utilized, any preservation and packing shall be removed by the contractor at no expense to the Government, when requested by the Government, to facilitate comparison between the first aticle model and production camouflage screening support systems.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:10Z
Check the source to verify that this is the currentversion before use.

5.2 Preservation. Preservation shall be level A, level B or commercial as specified (see 6.2).

5.2.1 Camouflage support system assembly.

5.2.1.1 Level A. The components comprising a complete camouflage support system assembly (see 3.1.2), shall be properly positioned and contained within the furnished carrying case and then placed in a polyethylene bag fabricated from material conforming to L-P-378, type I, class 1, grade C, finish I, film thickness 0.006 inches. The bag shall be tightly compressed around the carrying case by vacuum, and the bag closed by heat sealing. The bag containing the support system shall then be placed in a close-fitting box conforming to PPP-B-636, V3s, style FTC-L. The boxes shall be assembled and closed as specified in the appendix to the box specification.

5.2.1.2 Level B. The components comprising a complete camouflage support system assembly, contained within the furnished carrying case, shall be preserved as specified for level A in 5.2.1.1, except the box shall conform to PPP-B-636, type CF, class domestic, variety SW, grade as applicable to the weight of the contents, style FTC-L. Box assembly and closure shall be in accordance with the appendix to the box specification.

5.2.1.3 Commercial. The components comprising a complete camouflage support system assembly, contained within the furnished carrying case, shall be preserved in accordance with ASTM D 3951.

5.2.2 Camouflage support system individual component.

5.2.2.1 Levels A and B. Individual support system components, when required (see 6.2), shall be placed in unit containers. The unit containers shall be close-fitting boxes conforming to PPP-B-636, type CF, class domestic, variety SW, grade 200, style optional. Box closure shall be as specified in the appendix to the box specification. Like components only shall be placed in a unit container. Unlike components shall not be mixed within a unit container. Unless otherwise specified (see 6.2), the quantity of a component within a unit container shall be sufficient to result in a gross weight of not less than 45 pounds but not more than 50 pounds.

5.2.2.2 Commercial. Individual support system components, when required (see 6.2), shall be preserved as specified in ASTM D 3951.

5.3 Packing. Packing shall be level A or commercial as specified (see 6.2).

5.3.1 Camouflage support system assemblies.

5.3.1.1 Level A. Ten support system assemblies, preserved as specified in 5.2, shall be unitized in two stacks side by side, five cartons high, on a partial four-way entry, flush, stringer type, hardwood pallet.

5.3.1.1.1 Pallet. The quality of the lumber and assembly workmanship shall be in accordance with commercially acceptable practices.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the currentversion before use.

5.3.1.1.1.1 Deckboards. The deckboards shall have a minimum thickness of 9/16 inches and a minimum width of 3-1/2 inches and 5-1/2 inches, as applicable. The 5-1/2-inch width boards shall be utilized as end deckboards on both the top and bottom decks. Three 3-1/2-inch width boards shall be evenly spaced between the top end deckboards to complete the top deck. The bottom deck shall be completed by the placement of two 3-1/2-inch width boards, one each at 4 inches on either side of the centerline of the pallet length as shown in figure 6.

5.3.1.1.1.2 Stringers. The lumber used for the stringers shall have a minimum thickness of 1-1/2 inches and a minimum width of 3-1/2 inches. Each pallet shall require three stringers and they shall be positioned as shown in figure 6. Each stringer shall have two fork notches approximately 9 inches long by approximately 1-1/4 inches deep. The notches shall be positioned at approximately 9 inches on each side of the centerline of the stringer length. The size of the notch and the positioning of the notches shall be the same for all stringers.

5.3.1.1.1.3 Size. The length of the pallet (the stringer length) shall be equal to the outside dimension (+0 inches, -1/2 inch) of the support carton length. The width of the pallet (the deckboard length) shall be equal to the outside dimension (+0 inches, -1/2 inch) of the two, side by side support cartons.

5.3.1.1.2 Strapping. The cartons shall be secured to the pallet with five straps conforming to QQ-S-781, type I or IV, regular duty, size 1/2 inch, finish A, with a minimum thickness of 0.015 inch, or with nonmetallic strapping conforming to PPP-S-760, type II or III, with a minimum thickness of 0.020 inch. Two straps shall be applied lengthwise to the pallet and three straps shall be applied girthwise to the pallet (see figure 6). Fiberboard or plastic edge protectors of adequate design and size shall be placed between the carton edges and the strap to prevent excessive tearing and crushing of the carton.

5.3.1.2 Commercial. Camouflage support system assemblies, preserved as specified in 5.2, shall be packed in accordance with ASTM D 3951.

5.3.2 Camouflage support system individual components.

5.3.2.1 Level A. Camouflage support system individual components, preserved as specified in 5.2, shall be packed in close-fitting boxes conforming to PPP-B-601, overseas type, style optional. Box closure and strapping shall be as specified in the box specification and the appendix thereto except the strapping shall be flat and the finish B. Like components only shall be packed in each box.

5.3.2.2 Commercial. Camouflage support system individual components, preserved as specified in 5.2, shall be packed in accordance with ASTM D 3951. Like components only shall be packed in each container.

5.4 Marking.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the current version before use.

5.4.1 Levels A and B. In addition to any special or other identification marking required by the contract or purchase order (see 6.2), each unit pack, exterior container and unitized load, shall be marked in accordance with MIL-STD-129.

5.4.2 Commercial. Commercial marking shall be in accordance with ASTM D 3951. Additionally, each shipping container shall be marked with the cube and gross weight.

6. NOTES

6.1 Intended use. The support assembly is intended for support of a light-weight synthetic camouflage screen system.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Type, subtype, and class required (see 1.2 and 4.5.3.2).
c. When individual components are required, and number of units required (see 1.2.1 and 4.5.3.2).
d. When a first article is required for inspection and approval, and number of units required (see 3.2).
e. When reliability testing is required (see 3.10).
f. Time frame for submission of first article pack (see 5.1).
g. Degree of preservation and packing required (see 5.2 and 5.3).
h. When preservation, packaging, and packing of individual components are required (see 5.2.2 and 5.3.2).
i. When gross weight of unit container for individual components, when required, shall be other than as specified (see 5.2.2.1).
j. Any special marking (see 5.4.1).

6.3 First article. When a first article inspection is required, the item should be a preproduction model. The first article should consist of one or more units. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, tests, and approval of the first article test results and disposition of the first articles.

6.4 Government tooling. Information concerning Government tooling may be obtained by contacting the Commander, US Army Belvoir Research and Development Center, ATTN: STRBE-XE, Fort Belvoir, Virginia 22060-5606.

6.5 Visual standards for FRP batten spreaders. The contracting officer should arrange to loan to the contractor the Government-approved visual standards for batten spreaders. Information concerning these standards may be obtained by contacting the Commander, US Army Belvoir Research and Development Center, ATTN: STRBE-XE, Fort Belvoir, VA 22060-5606.

6.6 First article pack. Any changes or deviations of production packs from the approved first article pack will be subject to the approval of the contracting officer. Approval of the first article pack will not relieve the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

contractor of his obligation to preserve, package, pack, and mark the camouflage screening systems in accordance with this specification.

6.7 Levels A and B preservation. The intent of the polyethylene bag is to provide the means for compressing the filled carrying case, thus reducing the cube. The moisture barrier characteristic offered by the bag's application is secondary.

Custodian:
Army - ME

Preparing activity:
Army - ME

Project 1080-A068

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

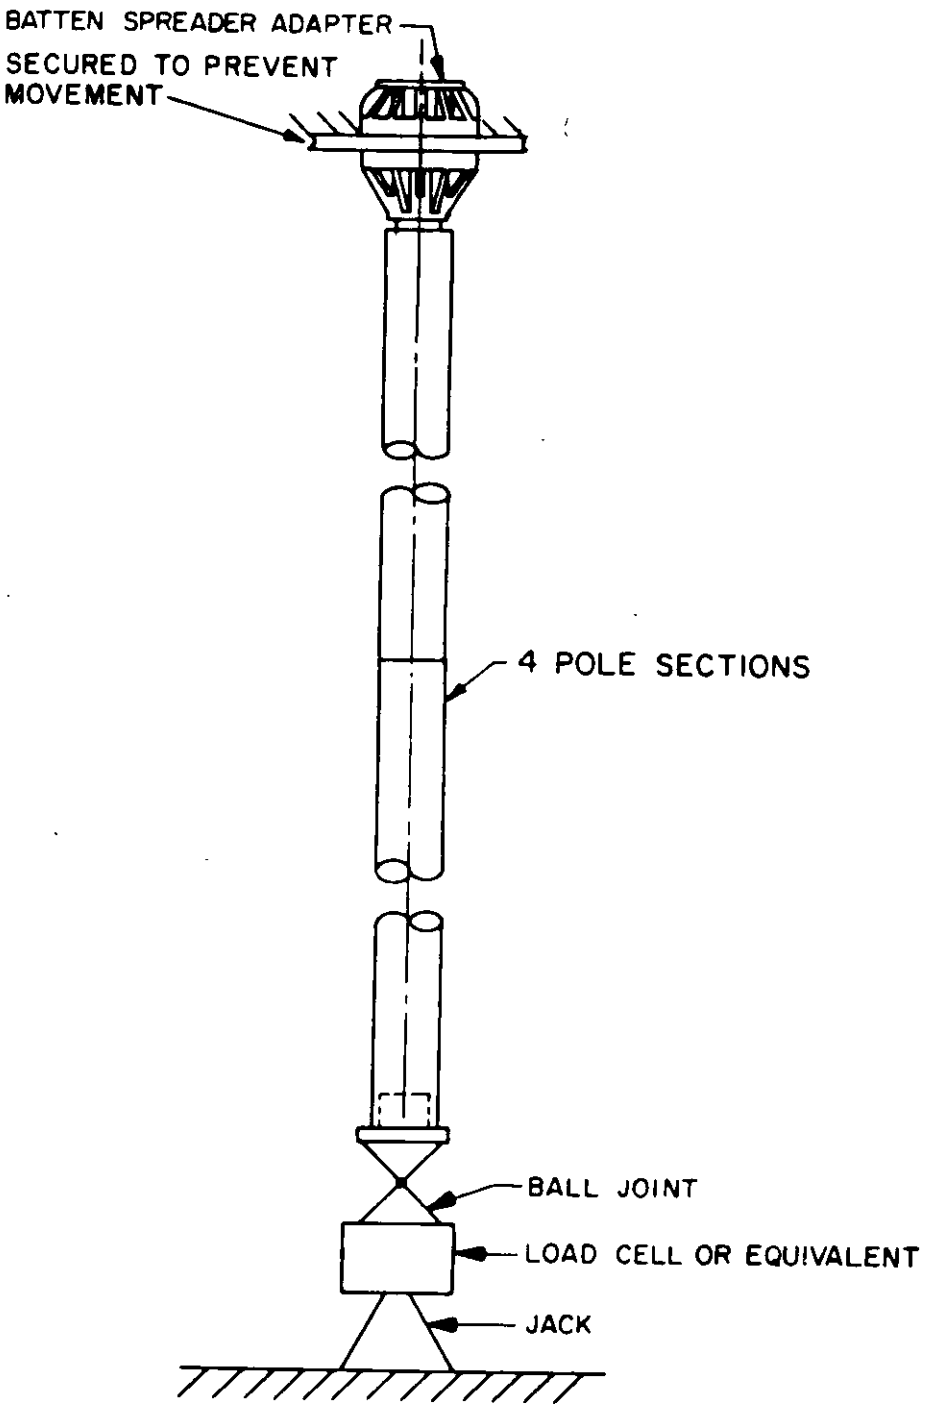


FIGURE 1. Load test for support pole.

X-2958F

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

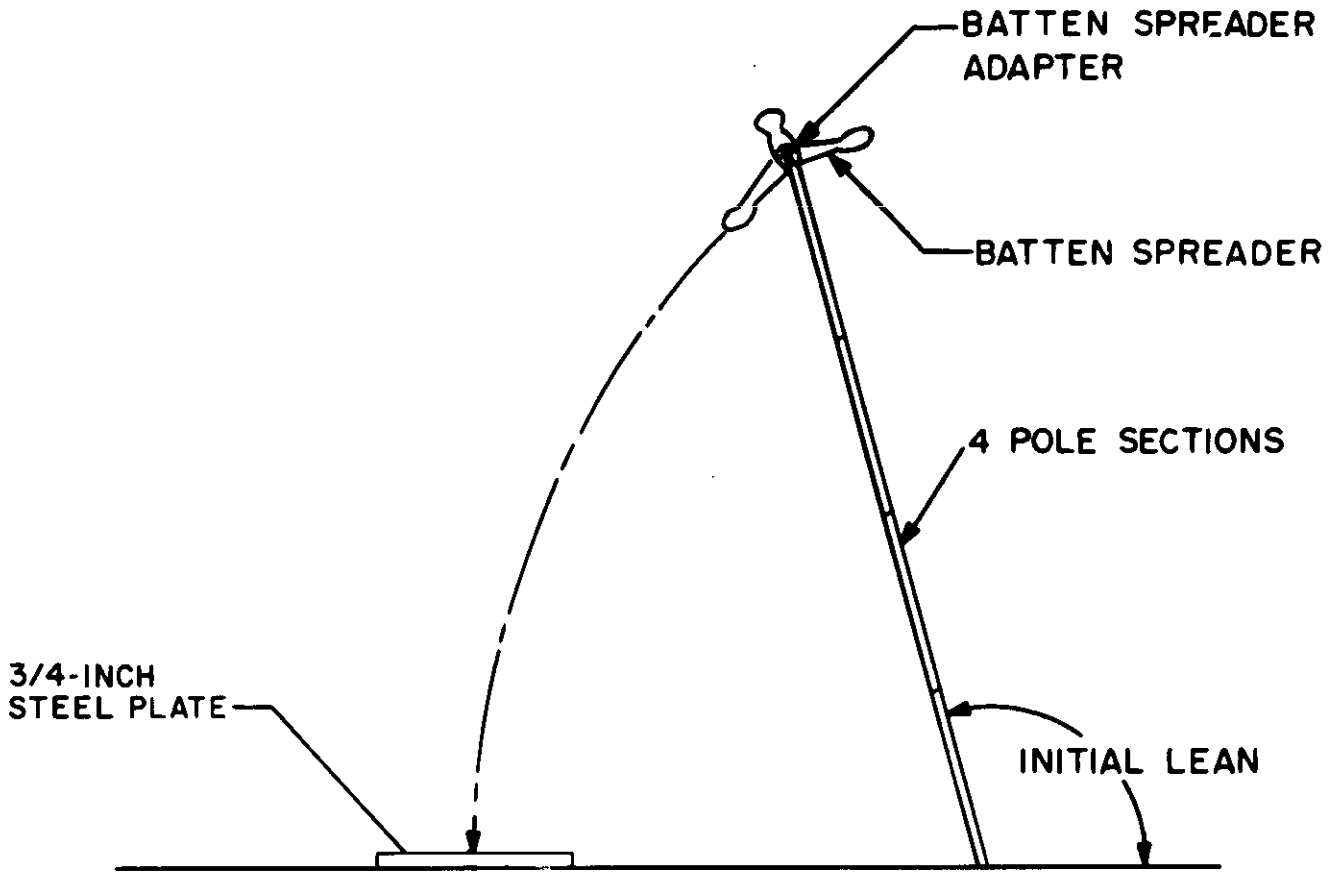


FIGURE 2. Drop test for support system components

X-3725B

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

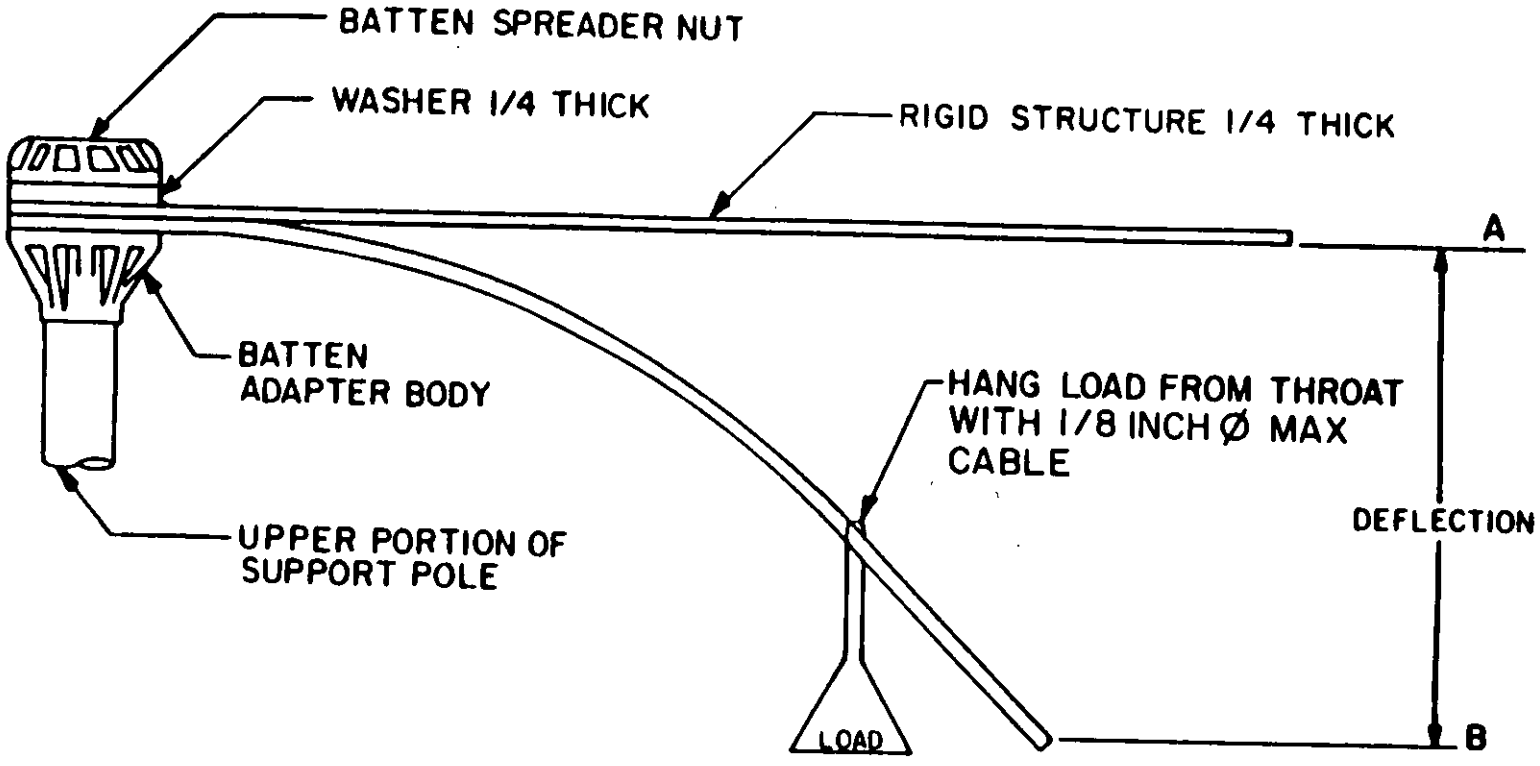


FIGURE 3. Load deflection fixture for batten spreaders.

X-3724C

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.


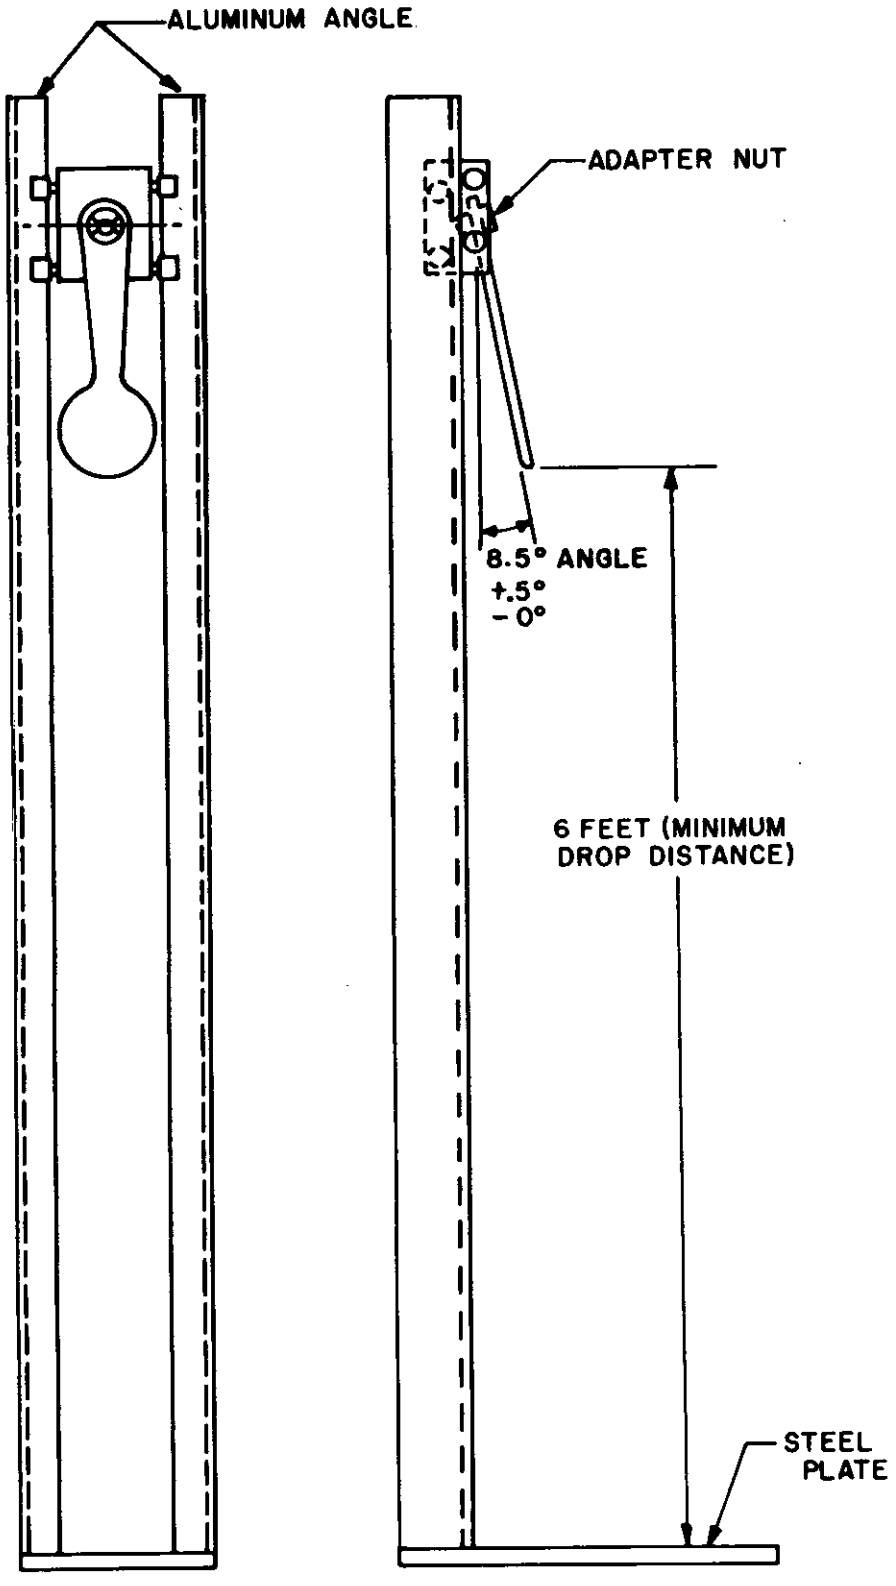


FIGURE 4. Batten spreader impact test fixture.

X-4432A

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the current version before use.

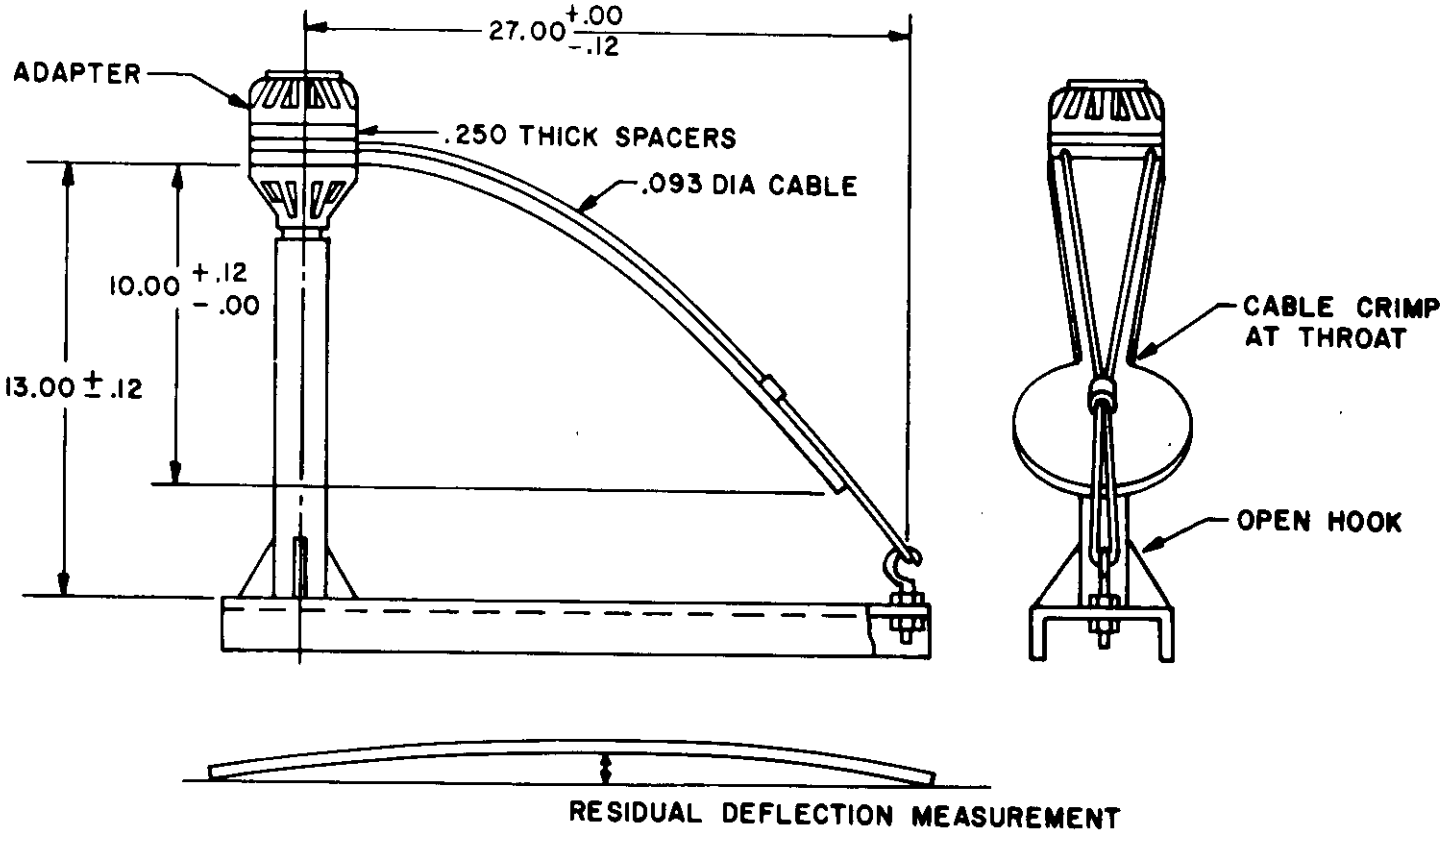

NOTE: ALL DIMENSIONS ARE IN INCHES.

FIGURE 5. Batten spreader residual deflection test.

X-4433

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

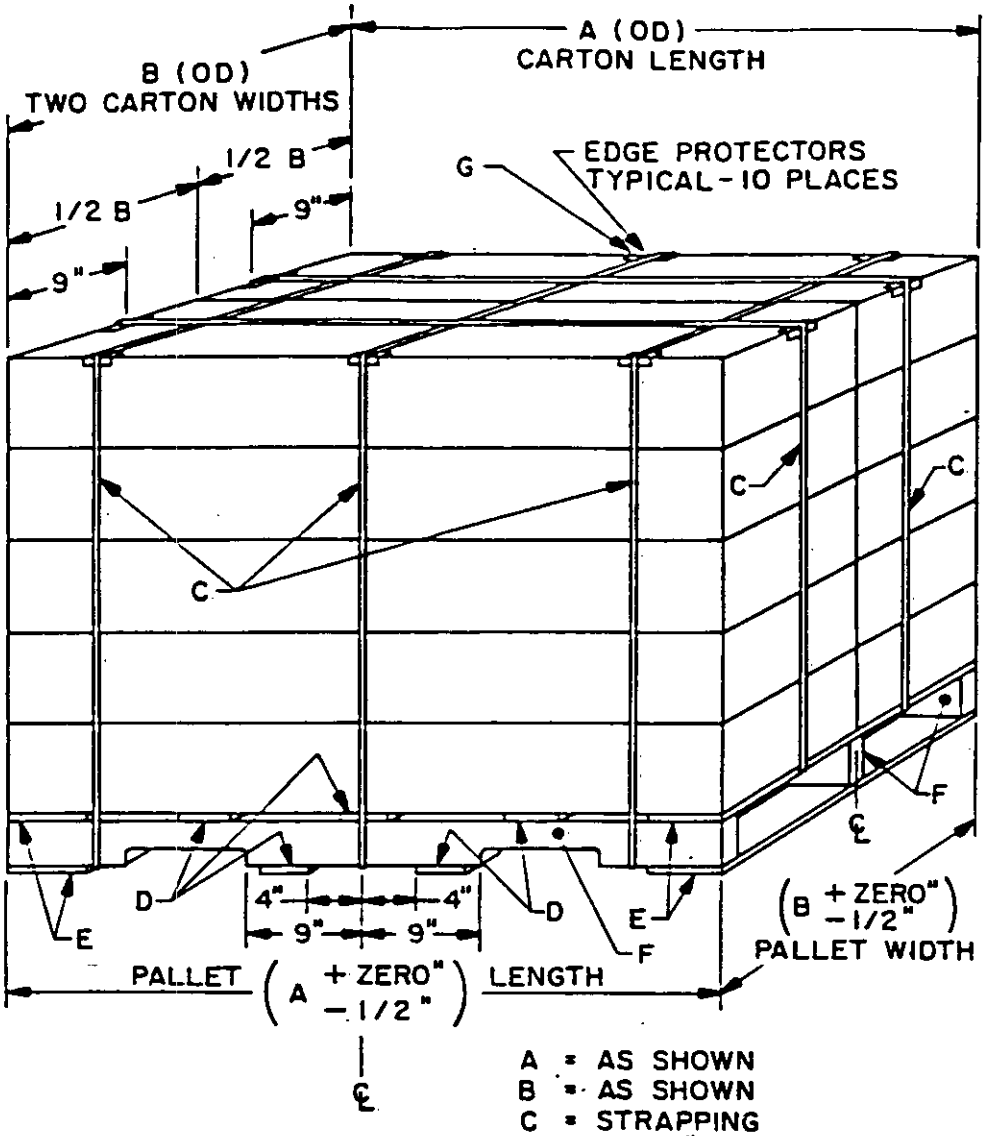


FIGURE 6. Unitization of support systems.

X-4164

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the current version before use.

APPENDIX

WORKMANSHIP STANDARDS FOR CAMOUFLAGE SCREEN SUPPORT SYSTEM

10. SCOPE

10.1 Scope. This appendix covers acceptance criteria in the manufacture of camouflage screen support system to achieve uniformity in appearance and quality. This appendix is a mandatory part of the specification. The information contained herein is intended for compliance.

20. APPLICABLE DOCUMENTS

This section is not applicable to this appendix.


30. REQUIREMENTS

30.1 Batten spreader.

30.1.1 Batten spreader subtype A and subtype B.

30.1.1.1 Questionable parts. Batten spreaders found to be of questionable quality when inspected to the criteria of this standard shall be subjected to a 80 pound load test (Strength Test). Successful completion of this test shall establish their conformance.

30.1.1.2 Critical area. This section of the batten spreader has been determined to be the area most susceptable to failure under load conditions. Special attention should be given to this area when parts are examined for conformance.

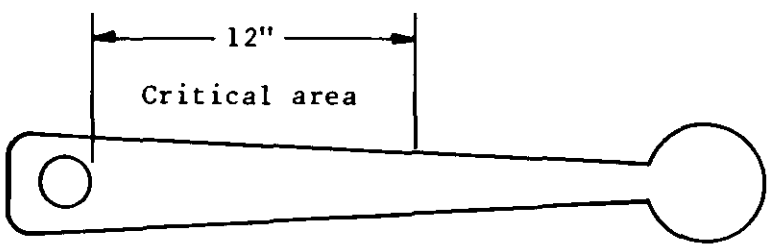


X-3999A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

30.1.1.3 Sharp corners and edges.


Sharp corners

Unacceptable

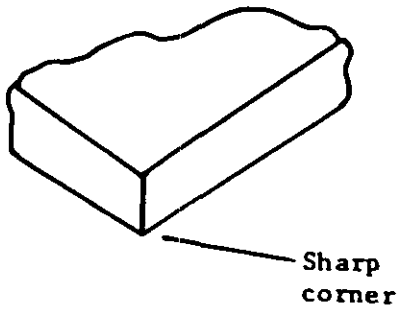


Part with sharp corner(s).

Acceptable

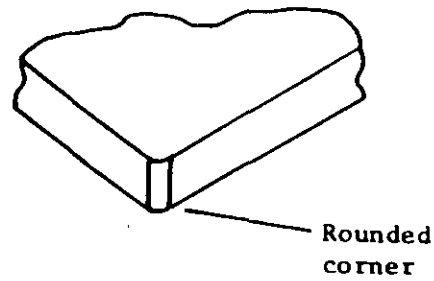


Corner on part has been rounded.

Sharp edges

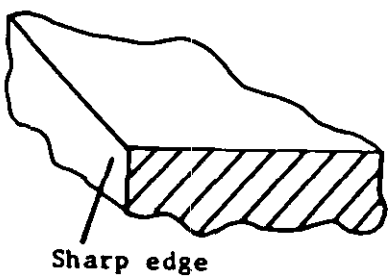

Part with sharp edge(s).

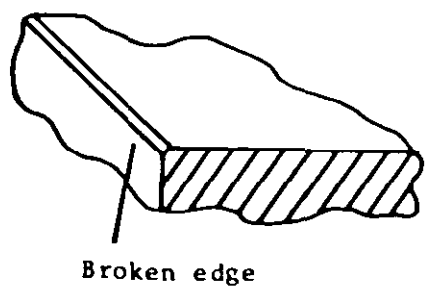


All edges on part broken.

Note: Refer to the approved visual aids when making conformance decisions for rough edges. Consider units with borderline conditions to be acceptable so as to eliminate grey areas.

X-4002A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

30.1.1.4 Mounting hole location (1.88 dimension). Check for conformance to the 1.88 ±.03 dimension (lateral location of mounting hole) as follows:




$$\text{Offset} = \frac{A-B}{2}$$

If the quotient does not exceed ±.03" consider the unit under inspection to be acceptable.

30.1.2 Batten spreader subtype A (FRP batten spreader).

30.1.2.1 Thickness measurement. The thickness measurement shall be made with a micrometer and shall be applicable to all areas except for ejection pin depressions. Acceptance (or rejection) for this characteristic shall be based on the average of 5 readings taken at random.

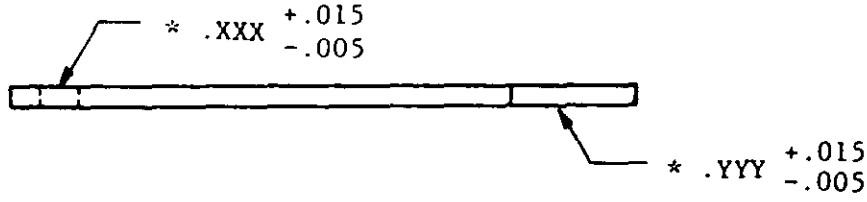


* Manufacturer shall specify a fixed value between the allowable thickness range in accordance with applicable drawing and remain within the allowable tolerances.

X-4006A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

30.1.2.2. Cracks and blisters.

Unacceptable

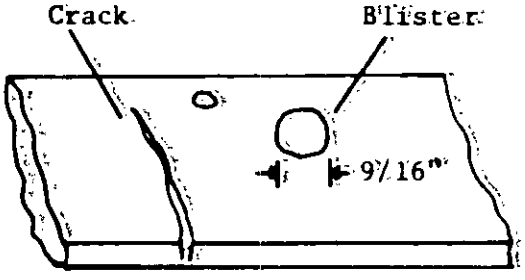

Acceptable

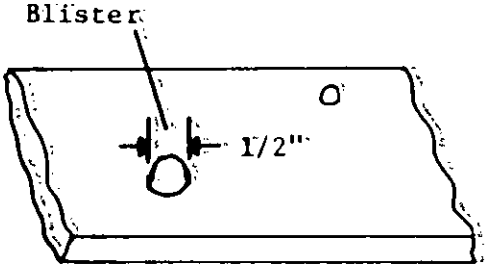

Cracks

Any crack visible to naked eye.

No cracks visible to naked eye.

Blisters

Blister which exceeds 1/2 inch diameter or total blisters per side in excess of one (1) square inch in area.

Blister which does not exceed 1/2 inch diameter or total blisters per side not in excess of one (1) square inch in area.


Note: Crazing is a surface condition which has little bearing on the effective use of the batten spreader. It is not cause for rejection.

X-4000A


Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the current version before use.

30.1.2.3 White areas and foreign material.

Unacceptable

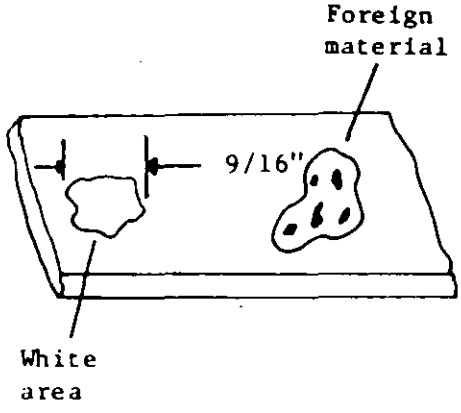

Acceptable

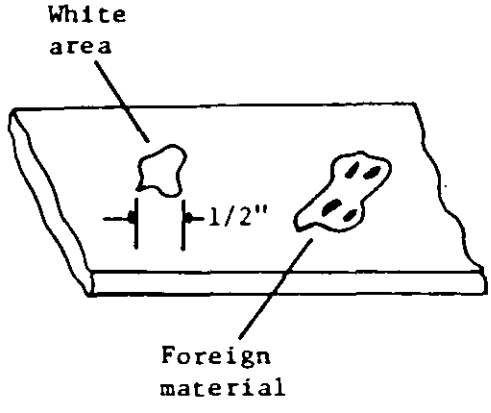

White areas

Part contains white area which exceeds 1/2 inch diameter or total white area per side in excess of one (1) square inch.	White area on part which does not exceed 1/2 inch in diameter or total white area per side not in excess of one (1) square inch.

Foreign material

Part contains foreign material in excess of one (1) square inch per side.	Foreign material on part does not exceed one (1) square inch per side.


Note: The area at which edges are broken shall not be included when making conformance decisions for white areas.

X-4001A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.


30.1.2.4 Porosity.

Unacceptable

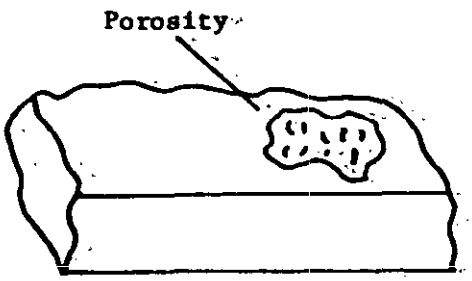


Porosity exceeds two (2) square inches per side.

Acceptable

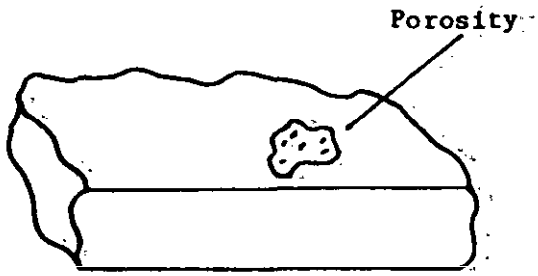


Porosity per side does not exceed two (2) square inches.

30.1.2.5 Removed fibers.

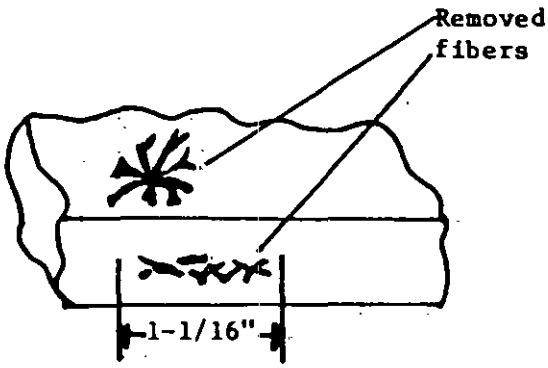

Removed fibers in excess of one (1) square inch per side or more than one (1) inch long on end.

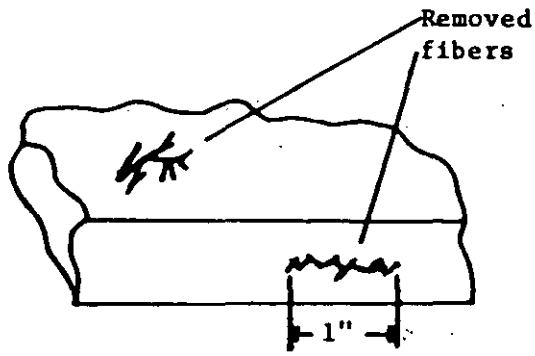


Removed fibers per side do not exceed one (1) square inch and are no more than one (1) inch in length on end.

X-4003A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.


30.1.2.6 Loose fibers.

Unacceptable

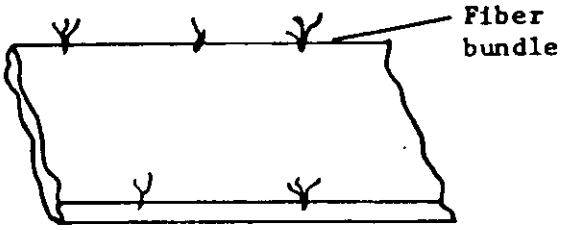

Part contains more than four (4) fiber bundles.

Acceptable

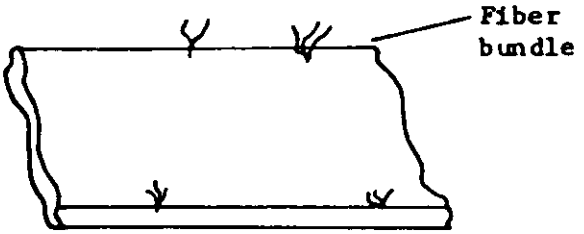


Maximum of four (4) fiber bundles on part.

Note: A fiber bundle consists of two (2) or more glass fibers which are localized and which extend freely above the surface of the batten spreader.

30.1.2.7 Edge separation.


Unacceptable

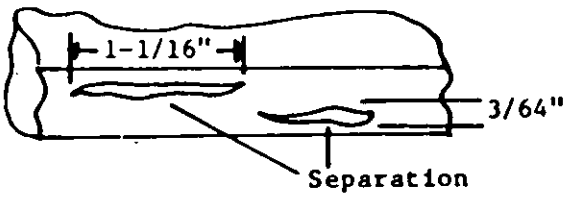

Part contains separation which exceeds one (1) inch in length.

Part contains separation with an opening in excess of 1/32 inch.

Acceptable

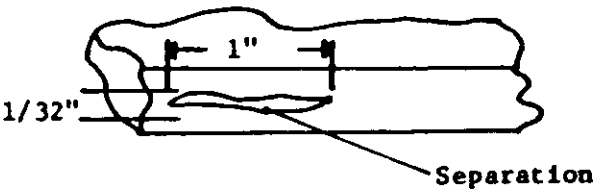

Length of separation on part does not exceed one (1) inch.

Opening of separation on parts does not exceed 1/32 inch.


X-4005A

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the current version before use.

30.1.2.8 Defect accumulations. Any combination of porosity, removed fibers, blisters, white areas, and foreign material in excess of 3 square inches per side shall be cause for rejection. This criteria shall apply only when the individual requirement specified for each of the defect areas is first satisfied.


30.1.2.9 Breaking strength test.

Unacceptable

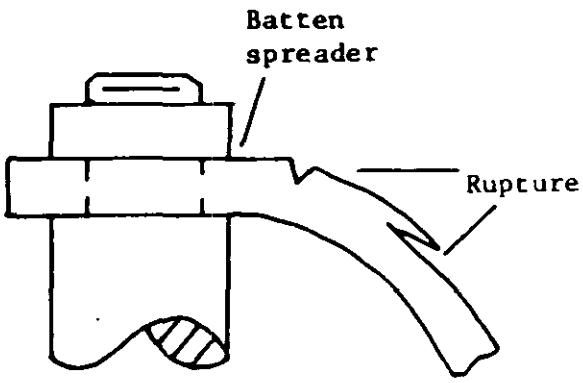

Rupture which results in abrupt change in specimen configuration.

Acceptable

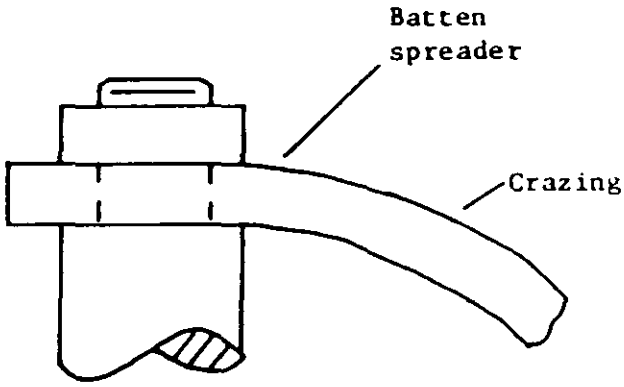

No evidence of rupture.

Crazing is allowable.

Notes: Specimen failure shall be defined as specimen rupture i.e. break typified by an abrupt change in specimen configuration.

Crazing may appear while the batten spreader is under load. Crazing shall not be cause for rejection.


Failure shall be recorded at the level (weight) at which rupture occurs.

30.1.2.10 Warped parts. Batten spreaders shall not be warped in excess of the limit provided by the approved visual standard (Reference Max. Std. Warp No. 1).


X-4004A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

30.1.2.11 Water cuts. Batten spreader can be reworked to blend in and deburr watercuts or edge blemishes which are not greater than 1/4 inch deep.

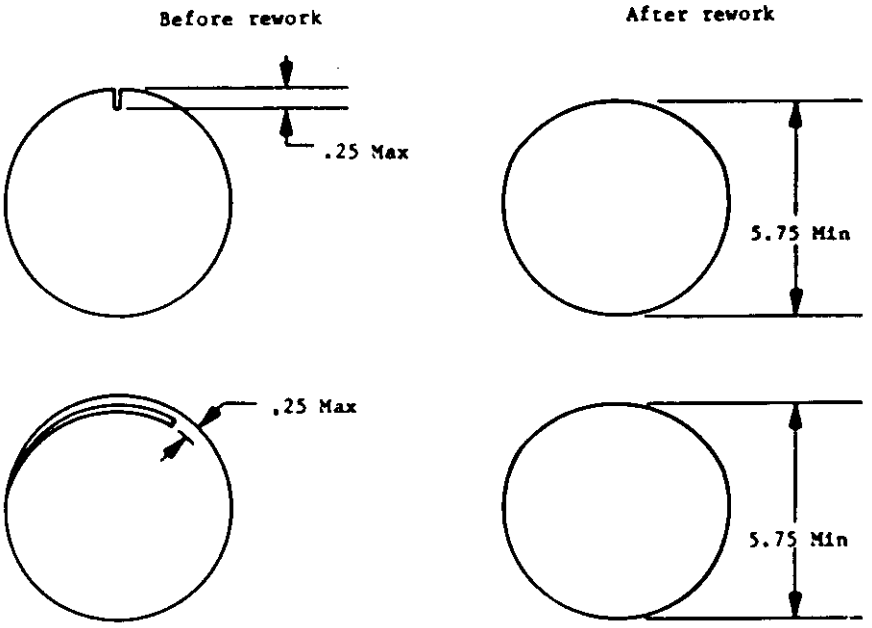

Water cuts or edge blemishes not greater than 1/8 inch deep and not located in critical areas or on both sides are acceptable. Transverse water cuts shall be acceptable without rework. Longitudinal watercuts shall be blended in and deburred.

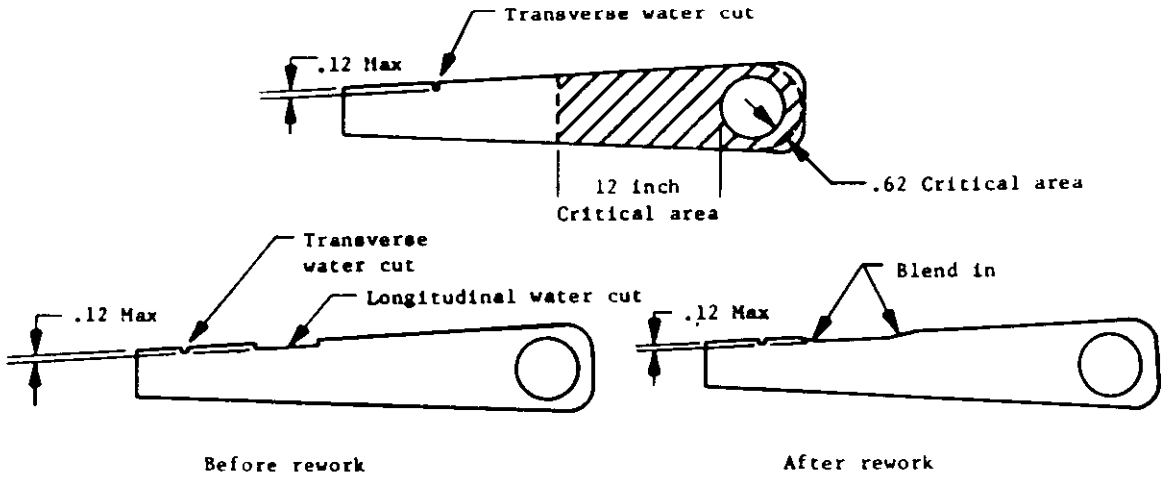

NOTE: Hole location dimensions shall be maintained regardless of watercuts.


X-4082A

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the currentversion before use.


APPENDIX

30.1.3 Batten spreader subtype B (thermoplastic batten spreader).

30.1.3.1 Thickness measurement. The thickness measurement shall be made with a micrometer and shall be applicable to all areas except for ejection pin depressions. Acceptance (or rejection) for this characteristic shall be based on the average of 5 readings taken at random on each of the components.

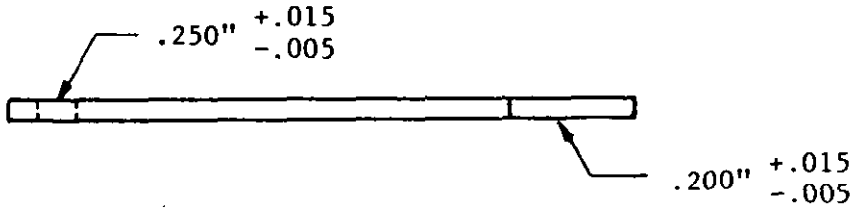


30.1.3.2 Cracks.

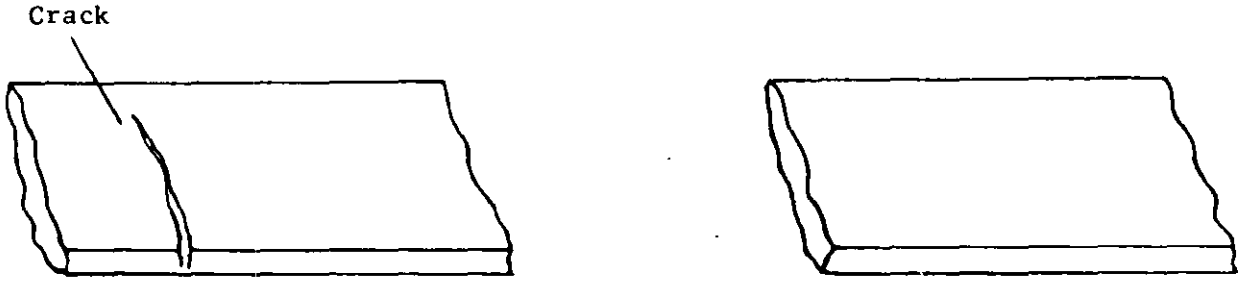


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

30.1.3.3 Foreign material.

Unacceptable

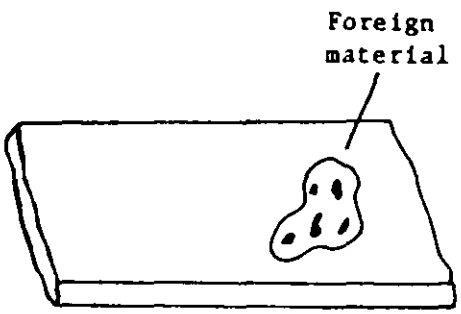

Acceptable

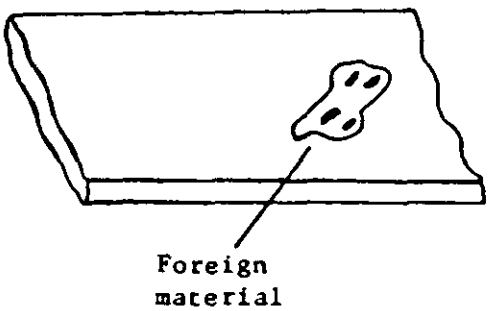

Foreign material

Part contains foreign material in excess of one (1) square inch per side.


Foreign material on part does not exceed one (1) square inch per side.

X-4444

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.


30.1.3.4 Porosity and blisters.

Unacceptable

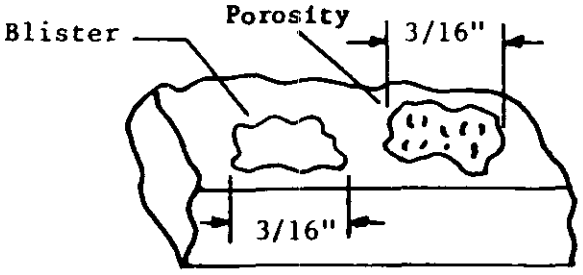

Any porosity or blister larger than 1/8" or total porosities or blisters shall not exceed one (1) sq. inch per side.

Acceptable

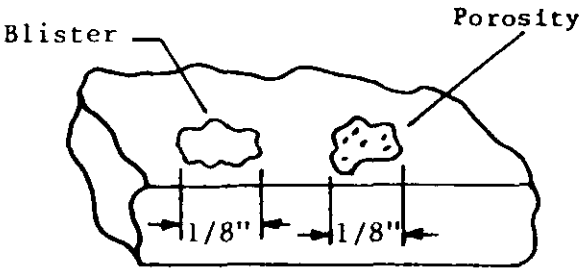

No porosity or blister larger than 1/8" or total porosities or blisters does not exceed one (1) sq. inch per side.


30.1.3.5 Defect accumulations. Any combination of porosity, blisters, and foreign material in excess of 1-1/2 square inches per side shall be cause for rejection. This criteria shall apply only when the individual requirement specified for each of the defect areas is first satisfied.

X-4445

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

30.2 Batten spreader adapter.

30.2.1 Discoloration. Discoloration will be allowed on the end opposite the threads if it does not extend along the side wall of the batten adapter body beyond the longer webs (approximately 1/8").

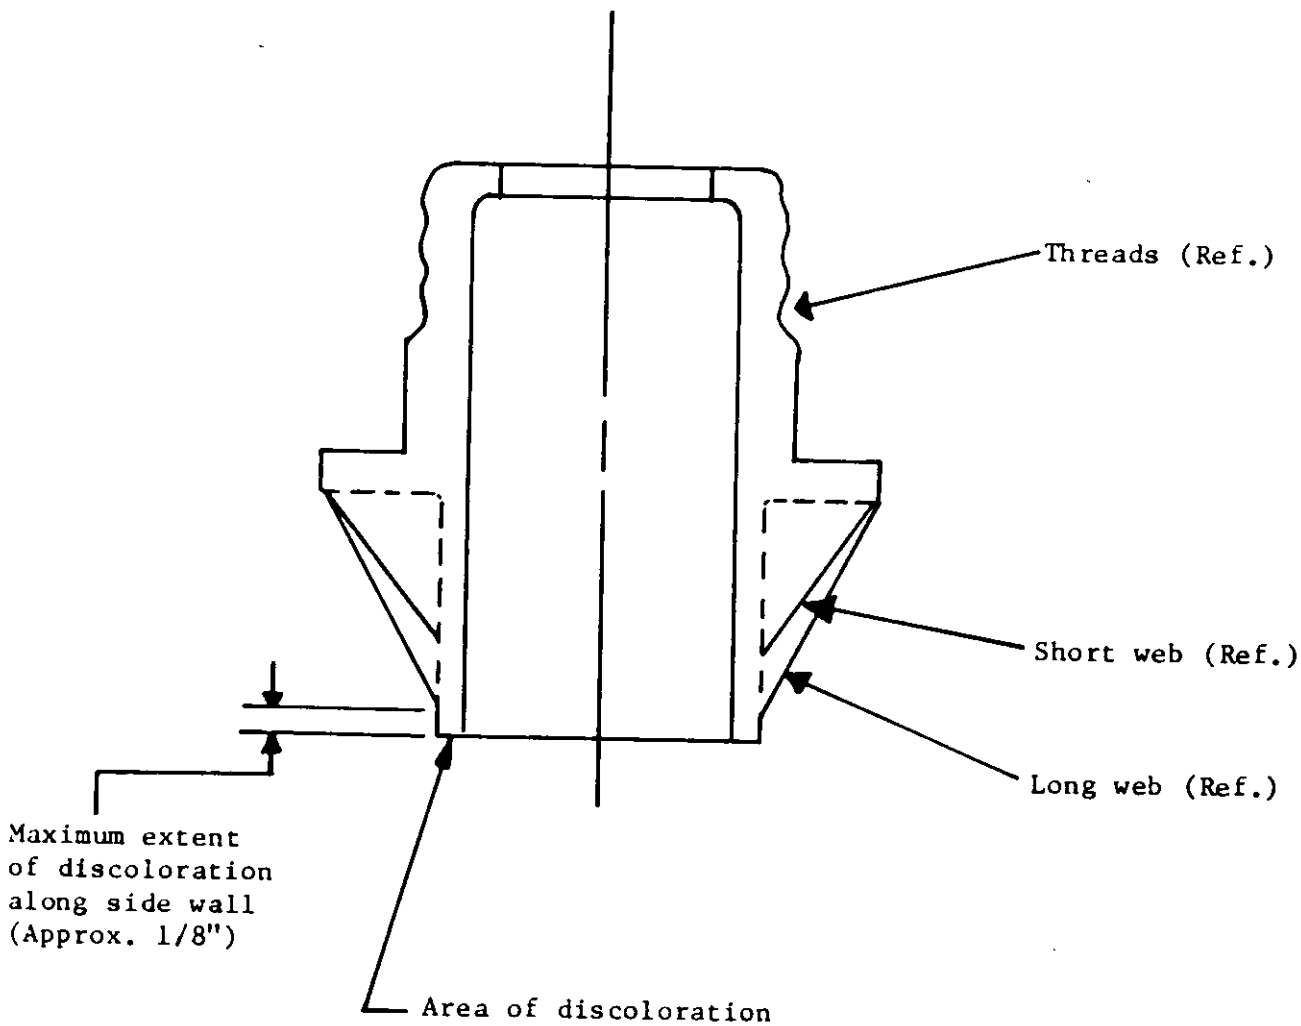

X-4007


Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the current version before use.

APPENDIX

30.3 Magnaformed poles, aluminum.


30.3.1 Pole assembly.

Unacceptable

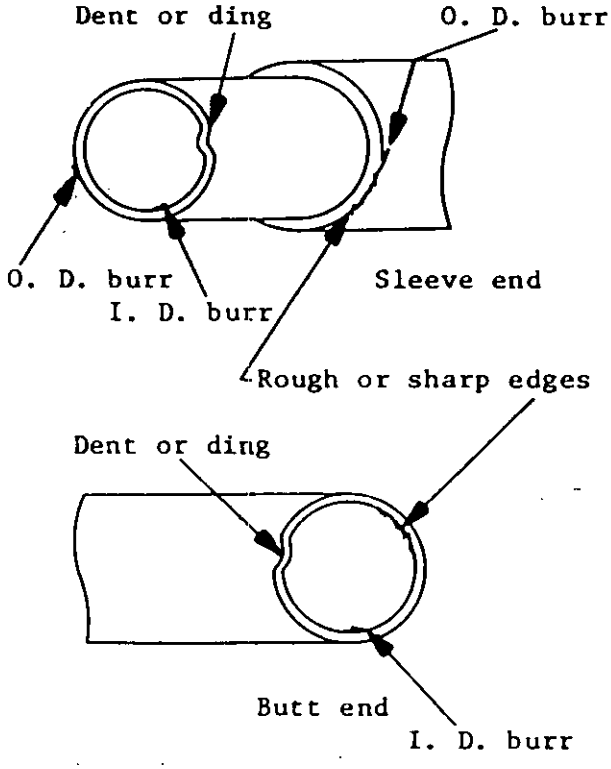


The above could hinder assembly and cause injury to personnel.

Acceptable

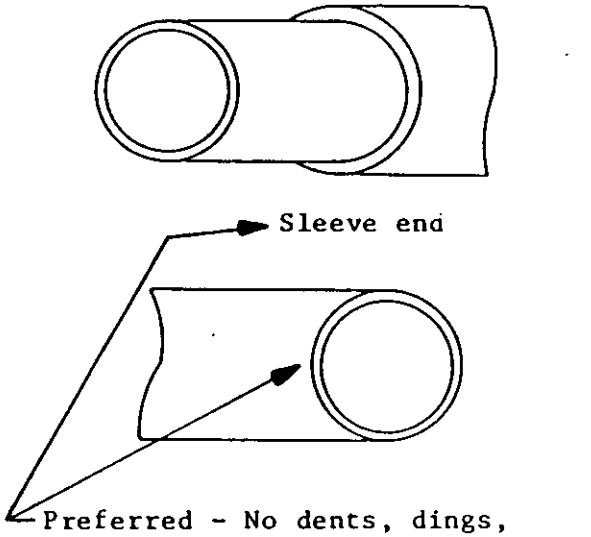

Preferred - No dents, dings, burrs or sharp edges.

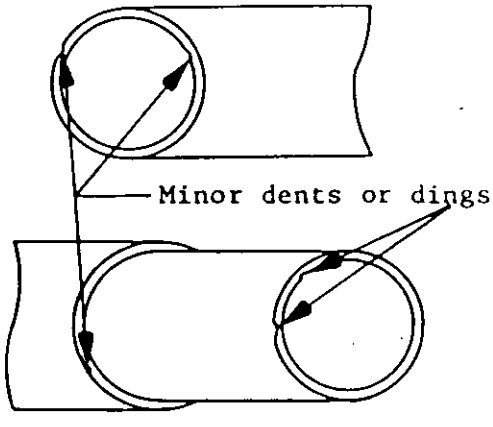

Do not affect fit, function or cause injury.

30.4 Color. Class 1 support poles shall be comparable to FED-STD-595, color 34079, or to an approved sample.

X-4073A

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the current version before use.

30.5 Grommets (rolled settings).

30.5.1 Grommet assembly.

Unacceptable	Acceptable
(a) More than one crack in a grommet.	(a) One crack maximum in a grommet.
(b) Grommet loose on material to which it is attached.	(b) Grommet firmly attached to its mating material.


X-4446

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

30.6 Packaging.

30.6.1 Box assembly.


Unacceptable

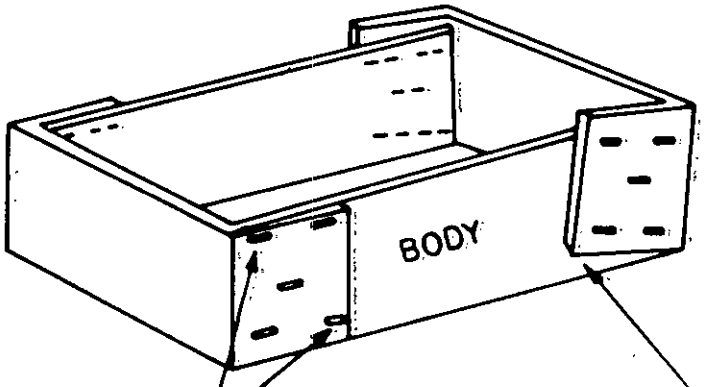

Staples closer than one (1) inch to free edges are not acceptable.


Flaps more than 1/4 inch above edge of side wall are not acceptable.

Acceptable

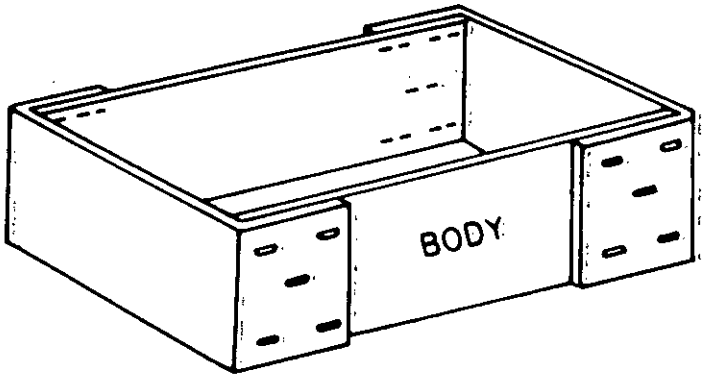

Typically preferred

Folding, staple location and pattern.

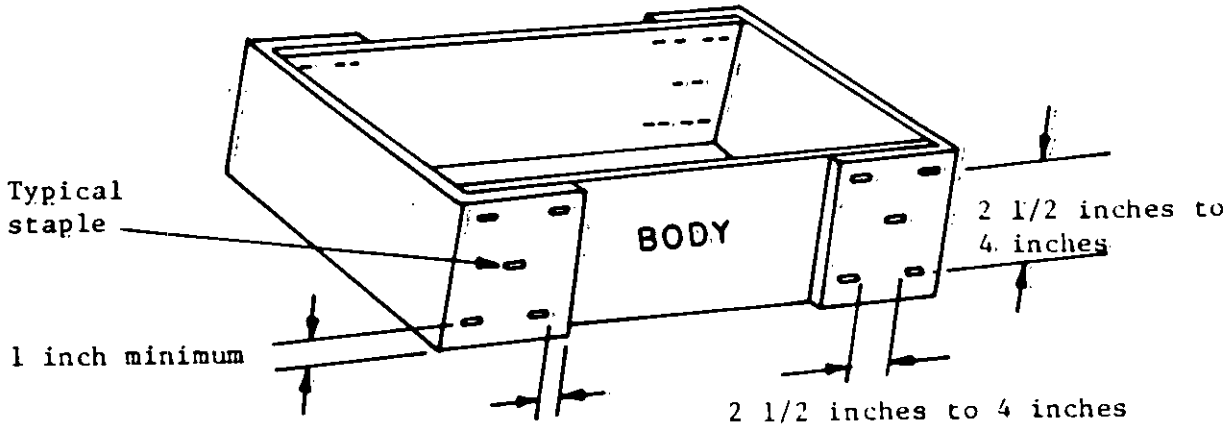


Acceptable dimensions for assembly

X-4048A

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the current version before use.

APPENDIX

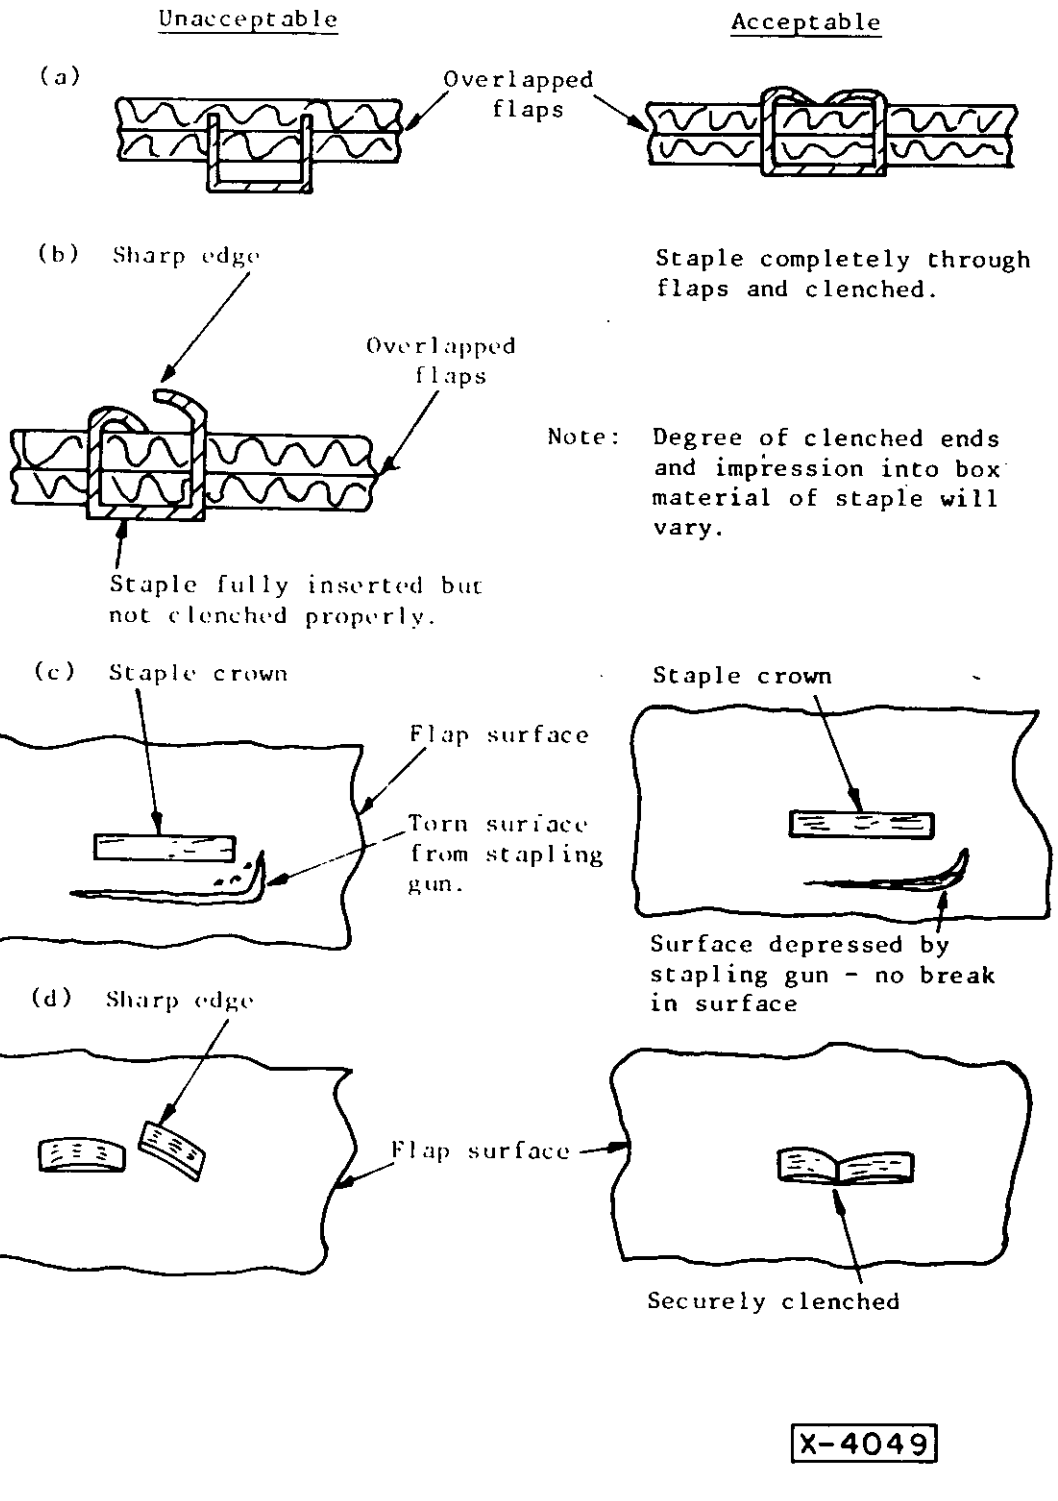

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the current version before use.


APPENDIX

Top or body of a container which exhibits punctures through the wall which exceed 1/2 inch square or which exhibits tears or separations of fiberboard material in excess of one (1) inch in length.	Completed container which contains not more than two (2) punctures which are 1/2 inch or less, or which contains not more than two (2) tears or separations which are one (1) inch in length or less.

Note: If not more than 10% of unacceptable conditions (a) and (c) are present on a completed box assembly, it shall be considered acceptable.


30.6.2 Polybag, heat seal.

Unacceptable

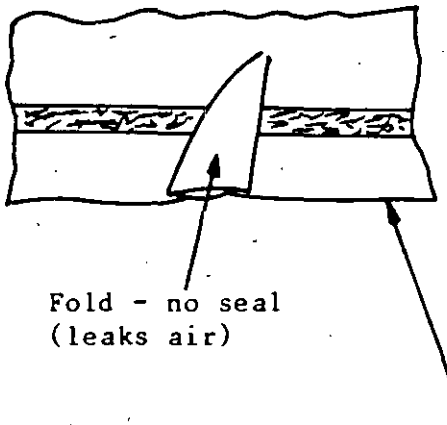

Fold, no seal (leaks air)

Acceptable

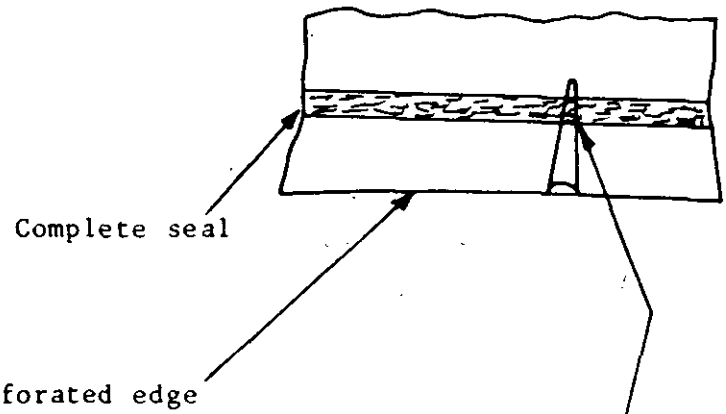


Folds if present are sealed (no air leakage)

X-4050A

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the current version before use.


30.6.3 Box closure.

Unacceptable

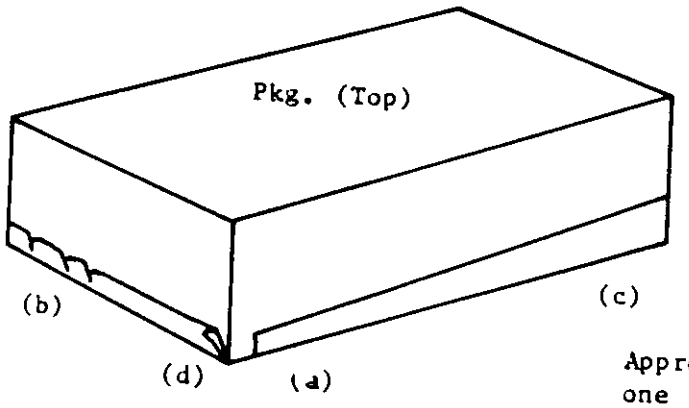


(a) Tape incomplete application
(b) Excessive wrinkles
(c) Tape unevenly applied
(d) Tape not sticking

Acceptable

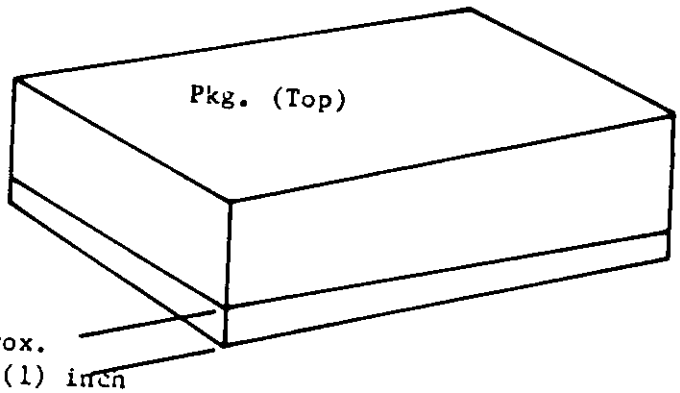


Preferred condition, complete application, no wrinkles, not unevenly applied and well stuck to carton all over.

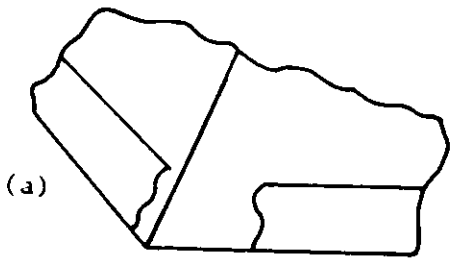

Incomplete application

(a) Tape must meet or overlap to be acceptable. (Length of overlap may vary.)

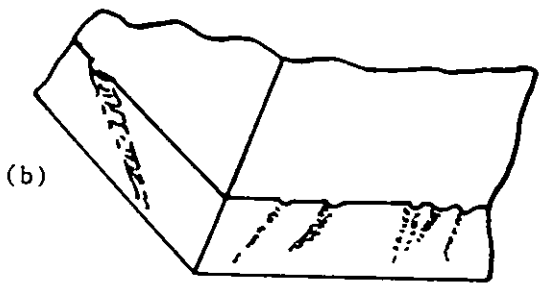

Excessive amount of wrinkles on more than 10% of a side and significant in size.

(b)
Note: Folding of tape is necessary at the corner proper, and acceptable.


Amount of wrinkles on not more than 10% of a side of significant size and/or not more than 20% which are superficial in nature.

X-4051A

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the current version before use.

Unacceptable

(c)

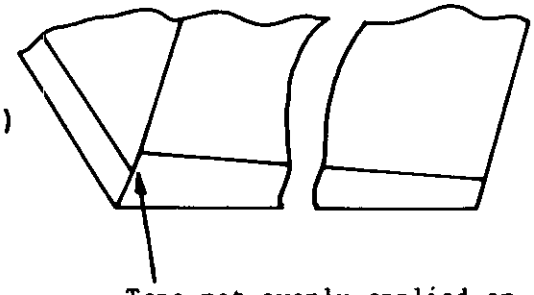


Tape not evenly applied on sides. (Varies over 1/2 inch in width)

Acceptable

(c) Taping acceptable when it varies in width less than 1/2 inch on a side.

(d)

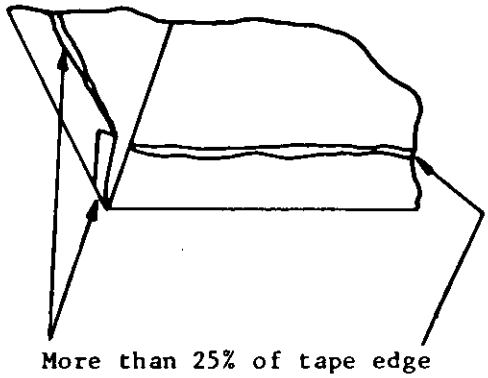

More than 25% of tape edge curls or does not adhere to box over 1/2 inch from edge of tape.

(d) Conditions where less than 25% of tape edge curls does not adhere to box over 1/2 inch from edge of tape are acceptable.

X-4052

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the current version before use.

30.6.4 Strapping application and pallet quality.

Unacceptable	Acceptable
a. Tension so great that strapping tears and cuts completely through carton edges.	a. Strapping tension firm but does not tear or cut completely through carton edges.
b. Strapping not within two inches of being parallel to the carton edges.	b. Strapping parallel to carton edges within two inches.
c. Strapping loose to the point that it can be easily moved sideways at the box or pallet edges where it had been applied.	c. Strapping which is applied firmly and cannot be easily moved sideways at the box or pallet edges.
d. Major damage to pallet such as broken stringers or deckboards.	d. Minor departures in pallet quality such as checks, shakes or splits, any of which are no longer than the width of the member.

X-4447

 U.S. GOVERNMENT PRINTING OFFICE: 1988 - 505-038/23856

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Belvoir R&D Center
ATTN: STRBE-DS
Fort Belvoir, VA 22060-5606

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-52765D(ME)	Camouflage Screening Support Systems

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the current version before use.