MIL-C-52771A(ME)
23 February 1976
SUPERSEDING
MIL-C-52771
10 December 1973

MILITARY SPECIFICATION

CAMOUFLAGE SCREENING SYSTEMS, MODULAR,

LIGHTWEIGHT, SYNTHETIC

This specification is approved for use by the U.S. Army Mobility Equipment Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers woodland and desert camouflage screening systems, synthetic, modular, complete with one hexagon and one rhombus lightweight screen, one repair kit with case, quick-connect-disconnect devices and instruction sheets, all within a transport case.

1.2 Classification. The camouflage screens covered by this specification shall be of the following types and classes, as specified (see 6.2):

Type I	- Radar Transparent
Type II	- Radar Scattering
Class 1	- Woodland
Class 2	- Desert

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

L-P-378	- Plastic Sheet and Strip, Thin Gauge, Polyolefin.
L-P-393	- Plastic Molding Material, Polycarbonate, Injection and Extrusion.

FSC 1080

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

V-T-285	- Thread, Polyester.
QQ-S-781	- Strapping, Steel, and Seals.
PPP-B-636	- Boxes, Shipping, Fiberboard.

Military

MIL-R-3390	- Rings, Dee.
MIL-W-4088	- Webbing, Textile, Woven Nylon.
MIL-C-20696	- Cloth, Coated, Nylon, Waterproof.
MIL-F-21840	- Fastener Tape, Hook and Pile, Nylon.
MIL-S-23190	- Strap, Cable, Adjustable, Plastic.
MIL-C-43006	- Cloth, Laminated, Vinyl-Nylon High Strength, Flexible.
MIL-C-43256	- Cord, Polyester, Solid Braid.
MIL-C-43678	- Cord, Polyester, Diamond Braid.

STANDARDS

Federal

FED. TEST METHOD STD. No. 141	- Paint, Varnish, Lacquer, and Related Materials; Methods of Inspection, Sampling, and Testing.
FED. TEST METHOD STD. No. 191	- Textile Test Methods.
FED. STD. No. 356	- Commercial Packaging of Supplies and Equipment.
FED. TEST METHOD STD. No. 406	- Plastics: Methods of Testing.
FED. STD. No. 595	- Colors.
FED. TEST METHOD STD. No. 601	- Rubber: Sampling and Testing.
FED. STD. No. 751	- Stitches, Seams, and Stitchings.

Military

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of US Military Property.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the current version before use.

DRAWINGS

ME

F13220E8500	- Pattern Areas for Rhombic, Woodland, Camouflage Screen.
E13220E8501	- Pattern Areas for Hexagon, Woodland, Camouflage Screen.
F13220E9162	- Pattern Areas for Rhombic, Desert, Camouflage Screen.
E13220E9163	- Pattern Areas for Hexagon, Desert, Camouflage Screen.

(Copies of specifications, standards, and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 471	- Test for Change in Properties of Elastomeric Vulcanizates Resulting from Immersion in Liquids.
D 1682	- Tests for Break Load and Elongation of Textile Fabrics.
G 26	- Recommended Practice for Operating Light and Water-Exposure Apparatus (Xenon-Arc Type) for Exposure of Nonmetallic Materials.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

AMERICAN IRON AND STEEL INSTITUTE (AISI)

Steel Products Manual - Stainless and Heat Resisting Steels.

(Application for copies should be addressed to the American Iron and Steel Institute, 150 East 42nd Street, New York, NY 10017.)

3. REQUIREMENTS

3.1 Description. The camouflage screening system (hereinafter called "screen") shall be as shown on Figures 1 through 34 and as specified herein. The screen shall consist of one hexagon shaped screen and one rhombic shaped screen, each 4.9 meters per side. The screen shall consist of edge-reinforced polyester fiber nets of 57 millimeter (mm) (2-1/4 inch) square

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the current version before use.

mesh, garnished with expanded incised camouflage cloth affixed to the net in color and texture patterns. The screen shall be equipped with quick-connect-disconnect (QCD) devices to allow multiple screen combinations. The screen shall be reversible, employing two different color patterns and shall be Type I, radar transparent, or Type II, radar scattering and Class 1 - Woodland, or Class 2 - Desert.

3.1.1 Assembly. The type screen specified shall consist of the following components and the assembly as manufactured shall weigh not more than 65 pounds:

(a) Screen, one each shape, i.e., one hexagon, one rhombic.
(b) Repair kit, one.
(c) Repair kit case, one.
(d) Lanyards, three (see 3.7.2).
(e) Transport case, one.
(f) Instructions for erecting screen.

3.1.2 Drawings. The drawings forming a part of this specification are end product drawings. No deviation from the prescribed dimensions or tolerances is permissible without prior approval of the contracting officer. Where tolerances could cumulatively result in incorrect fits, the contractor shall provide tolerances within those prescribed on the drawings to insure correct fit, assembly, and operation of the screen. Any data (e.g., shop drawings, layouts flow sheets, processing procedures, etc.) prepared by the contractor or obtained from a vendor to support fabrication and manufacture of the production item shall be made available, upon request, for inspection by the contracting officer or his designated representative.

3.2 First article (preproduction model). The contractor shall furnish one or more screens (see 6.2) for examination and necessary samples as specified (see 6.2) for testing within the time frame specified to prove prior to starting production that his production methods will produce screens that comply with the requirements of this specification. Examination and tests shall be as specified in Section 4; and, unless otherwise specified herein, all examination and tests shall be conducted by the contractor subject to surveillance and approval by the Government (see 6.3). When specified (see 6.2), the Government will conduct any or all of the preproduction examination and tests.

3.3 Initial production. When specified (see 6.2), the contractor shall furnish to the Government one or more complete screens and necessary samples for inspection as specified in 4.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

3.4 Material. Material shall be as specified herein and as shown on applicable figures. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification.

3.4.1 Net twine. The net twine shall be a continuous multifilament polyester (polyethylene glycol terephthalate) material having a specific gravity within the range of 1.36 to 1.40. The twine denier size shall be either 1000 or 1100, 5 ply, 4.5 twist per inch ± 10 percent in singles and 3.75 twist per inch ± 10 percent in ply.

3.4.2 Polyester cord. The polyester cord shall be solid braided polyester cord and shall be 5/32 inch in diameter conforming to MIL-C-43256.

3.4.3 Polyester thread. Polyester thread shall conform to V-T-285, Type I, Class 1, Subclass B, Size FF, or Type II, Class 1, Subclass B, Size FF.

3.4.4 Vinyl-nylon cloth. Vinyl-nylon cloth shall conform to MIL-C-43006, Type I, Class 2. Oil resistance and resistance to aromatic hydrocartons shall be in compliance with MIL-C-20696, Type I and II.

3.4.5 Base cloth. The base cloth shall be optional provided that the finished camouflage cloth meets the requirements specified herein.

3.4.6 Quick-connect-disconnect brackets and pins. The brackets and pins shall be polycarbonate oxide resin conforming to L-P-393.

3.4.7 Lanyard cord. The lanyard cord shall conform to MIL-C-43678.

3.4.8 Nylon webbing. Nylon webbing shall conform to MIL-W-4088, Type VIII.

3.4.9 Fastener tape. Fastener tape shall conform to MIL-F-21840, K, steel, 1-3/4-inch width. Color shall be black.

3.5 Nets. The netting for the nets shall be fabricated of the polyester twine as specified in 3.4.1 and as shown in Figures 1 and 2. The netting shall have a square mesh size of 2.25 inches ± 1/8 inch firmly secured by knotting to prevent slippage. Nets shall be made from a single continuous width of netting with a maximum of two strips sewn together to form the required net width specified herein with polyester thread specified in 3.4.3. Hand knotting shall be allowable to form a continuous width of netting. The nets shall have a reinforcement cord as specified in 3.5.1, corner patches as specified in 3.5.2, and QCD brackets as specified in 3.5.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

3.5.1 Edge-reinforcement cord. The edge-reinforcement cord shall be a polyester cord as specified in 3.4.2 and shall extend around the entire perimeter of the net as shown in Figures 1 and 2. The edge-reinforcement cord shall have no more than three splices. Splices shall be overlapped not less than 12 inches. The edge-reinforcement cord shall be sewn to each of the net's edge meshes, except that splices may be hand lashed to the net provided all other requirements and tests of this specification are met. Sewing methods using stitches shall not unravel or loosen more th one mesh length from a thread breaking point.

3.5.2 Corner patches. All corners of the nets shall be equipped with patches of coated nylon cloth as specified in 3.4.4. The corner patches shall be attached as shown in Figure 3 and sewn in place as specified in 3.5.4 with polyester thread as specified in 3.4.3.

3.5.3 Quick-connect-disconnect brackets (QCD). The edge-reinforcement cord of the nets shall be equipped with QCD brackets as specified in 3.4.6 as shown in Figures 1, 2, and 3.

3.5.4 Stitches and stitching. Stitches and stitching shall conform to FED. STD. No. 751, Type 304.

3.5.5 Treated nets. All nets shall be treated with stable dyes or pigmented coating compound. The treated net shall have a finish that is chemically stable against sunlight and accompanying ultraviolet radiation and insoluble in water and hydrocarbons. The weight increase of the treated net after thorough drying shall not exceed 40 percent of the untreated net.

3.5.5.1 Weight increase after water immersion. The weight increase of the treated net mesh after immersion in distilled water for 24 hours at 73° F, plus or minus 2° F, shall not exceed 25 percent based on the weight of the treated net mesh before immersion.

3.5.5.2 Breaking strength. The breaking strength of the treated net mesh shall be not less than 50 pounds when tested in accordance with 4.6.2.1.3.

3.5.5.2.1 After accelerated weathering. The breaking strength of the treated net mesh after accelerated weathering for 300 hours shall be not less than 45 pounds when tested in accordance with 4.6.2.1.3.1.

3.5.5.2.2 After accelerated aging. The breaking strength of the treated net mesh after accelerated aging for 150 hours at 175° F, plus or minus 2° F, shall be not less than 45 pounds when tested in accordance with 4.6.2.1.3.2.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the current version before use.

3.5.5.2.3 After water immersion. The breaking strength of the treated net mesh after immersion in water for 24 hours at 160° F, plus or minus 2° F, shall be not less than 45 pounds when tested in accordance with 4.6.2.1.3.3.

3.5.5.2.4 After petroleum immersion. The breaking strength of the treated net mesh after immersion in Medium No. 5 for 2 hours at 73° F, plus or minus 2° F, as described in FED. TEST METHOD STD. No. 601, Method 6001, shall be not less than 45 pounds when tested in accordance with 4.6.2.1.3.4.

3.5.5.2.5 After salt fog exposure. The breaking strength of the treated net mesh after being subjected to 300 hours of 5 percent solution salt spray (fog) exposure shall be not less than 45 pounds when tested in accordance with 4.6.2.1.3.5.

3.5.5.3 Stiffness. The stiffness of the treated net at minus 40° F shall be not greater than 10 percent when tested in accordance with 4.6.2.1.4.

3.5.5.4 Solubility. The compound used in coloring the net shall not be soluble in water and show no discoloration of the water after being immersed in distilled water for 24 hours at 160° F, plus or minus 10° F.

3.5.5.5 Flame resistance. The treated net mesh shall be self-extinguishing and after-flame shall be not more than 8 seconds. After-glow shall be not more than 15 seconds after the flame is extinguished or the twine ceases to burn.

3.5.5.6 Fungus resistance. The treated net mesh shall not support fungus growth.

3.5.5.7 Color.

3.5.5.7.1 Woodland. The color for the materials used for fabrication of the woodland net and the net finish specified in 3.5.5 shall be in accordance with FED. STD. No. 595, Color No. 34087.

3.5.5.7.2 Desert. The color for the materials used for fabrication of the desert net and the net finish specified in 3.5.5 shall be in accordance with FED. STD. No. 595, Color No. 30277.

3.6 Camouflage cloth. The basic nets shall be garnished with camouflage cloth. The camouflage cloth shall be base cloth as specified in 3.4.5 with color compounds applied as specified in 3.6.3. The camouflage cloth shall be incised as shown in Figure 4 or 5, stretched to 85 percent

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

coverage, and affixed to the treated basic net in color and pattern areas as illustrated in Figures 6 through 9 and Drawings F13220E8500, F13220E8501, F13220E9162, and E13220E9163. The percent coverage is the ratio of the non-expanded area before attachment to the area of the screen covered after attachment.

$$100 \times \frac{\text{Non-Expanded camouflage cloth}}{\text{Expanded camouflage cloth attached to net}} = \text{percent coverage}$$

Open areas between patterns shall not exceed 81 square inches for any one hole. The total open area in the hexagon screen shall not exceed 243 square inches and 81 square inches in the rhombic screen. The camouflage cloth shall be processed to produce two basic types of garnish: Type I - radar transparent, and Type II - radar scattering.

3.6.1 Radar transparent cloth. The radar transparent cloth shall be produced by applying a continuous film or film layers of color compound as specified in 3.6.3, and in the prescribed colors to each side of the base cloth.

3.6.2 Radar scattering cloth. The radar scattering cloth shall be produced with an intermediate step in which electrically conductive elements as specified in 3.6.2.1 shall be uniformly dispersed in random orientation onto the base cloth. The electrically conductive elements shall be firmly affixed thereto, with a bonding compound as specified in 3.6.2.2 which will be compatible with the color compound to be applied as specified in 3.6.3.

3.6.2.1 Conductive elements. The conductive elements shall be produced from stainless steel conforming to AISI Type 304 and shall have a nominal diameter of 8 microns and a nominal length of 0.170 inches. The one-way transmission of flat stock color-coated cloth shall be a maximum of 25 percent. Measurements shall be made at X band (approximately 10 GHz) and averaged over a monitored area of not greater than 100 square feet of camouflage cloth. The measurements shall be made using a six-horn configuration depicted on Figure 34.

3.6.2.2 Bonding compound. The bonding compound used to bond the conductive elements to the base cloth shall be a neutral color. The bonding compound shall be compatible with the color compound with respect to adhesion and chemical stability.

3.6.3 Color compounds. The color compounds used to produce colors shall impart to the camouflage cloth of both types the required spectral reflectance properties in the visible (380 to 700 nanometers) and near

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

and 4 (3 AISI Per inch + 10 percent in RIX.

infrared (700 to 900 nanometers) spectrums. The color compounds shall be formulated with commercially available pigments or dyestuffs. The color compounds shall be applied to each side of the base cloth as specified in Table I. Color compounds used shall not produce skin irritation or other effects deleterious to the health of personnel under the proposed condition of use. The color compound shall be a continuous film or film layers so as to seal the cloth and provide a matte finish. Surface interruptions on the color-coated cloth shall be limited to 1/8 inch in width, a maximum total length of 24 inches in any one pattern, and no more than 30 percent of the patterns on a screen may contain such wrinkles.

Table I. Color Requirements

Color	Trichromatic Coefficients x	y	Y
Woodland			
1. Light Green	0.362	0.395	0.094 - 0.108
2. Dark Green	0.343	0.390	0.070 - 0.085
3. Forest Green	0.330	0.355	0.058 - 0.072
4. Olive	0.363	0.377	0.097 - 0.113
5. Khaki	0.357	0.362	0.210 - 0.230
6. Brown	0.360	0.350	0.102 - 0.118
7. Tan	0.388	0.370	0.210 - 0.230
Desert			
1. Khaki	0.350	0.355	0.242 - 0.264
2. Tan	0.356	0.351	0.336 - 0.361
3. Straw	0.396	0.393	0.281 - 0.304
4. Russet	0.390	0.350	0.171 - 0.189
5. Light Brown	0.367	0.358	0.190 - 0.210

Note: Color difference tolerances are shown in Figures 10 through 23.

3.6.4 Finished camouflage cloth. The finished camouflage cloth shall be the base cloth with color compounds applied (radar transparent, Type I) or the base cloth rendered radar scattering with color compounds applied (Type II). The finished Type I camouflage cloth and the finished Type II camouflage cloth shall weigh not more than 8.0 ounces per square yard each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

3.6.4.1 After water immersion. The weight increase after water immersion in distilled water for 24 hours at 73° F, plus or minus 2° F, shall not exceed 15 percent based on the weight of the unimmersed finished cloth.

3.6.4.2 Stiffness. The stiffness of the finished cloth shall be not greater than 10 centimeters (cm) at room temperature and 16 cm at -40° F when tested in accordance with 4.6.2.2.2.

3.6.4.3 Tackiness. Folds of the finished camouflage cloth shall not adhere to each other.

3.6.4.4 Solubility. The compound used in coating the cloth shall be insoluble in water. No discoloration of the water shall be noted when the finish cloth is tested for solubility (see 4.6.2.2.4).

3.6.4.5 Breaking strength. The breaking strength of the finished camouflage cloth shall be not less than 40 pounds for the machine direction and 20 pounds for the transverse direction. The breaking strengths of the camouflage cloth for the exposure test shall be as specified in 3.6.4.5.1 through 3.6.4.5.7. The tests shall be for both the machine and transverse directions.

3.6.4.5.1 After accelerated weathering. The breaking strength of the finished camouflage cloth after being subjected to 300 hours accelerated weathering shall be not less than 36 pounds for the machine direction and 18 pounds for the transverse direction.

3.6.4.5.2 After accelerated aging. After accelerated aging for 10 days at 175° F, plus or minus 5° F, the breaking strength of the finished camouflage cloth shall be not less than 36 pounds for the machine direction and 18 pounds for the transverse direction.

3.6.4.5.3 After accelerated fading. After exposure to 140 hours of accelerated fading the breaking strength of the finished camouflage cloth shall be not less than 36 pounds for the machine direction and 18 pounds for the transverse direction.

3.6.4.5.4 After water immersion. After a 24-hour immersion exposure in distilled water at 73° F, plus or minus 2° F, the strength of the finished camouflage cloth shall be not less than 36 pounds for the machine direction and 18 pounds for the transverse direction.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

3.6.4.5.5 After petroleum immersion. The breaking strength of the finished camouflage cloth after immersion in Medium No. 5 for 2 hours at 73° F, plus or minus 2° F, as described in FED. TEST METHOD STD. No. 601, Method 6001, shall be not less than 36 pounds for the machine direction and 18 pounds for the transverse direction.

3.6.4.5.6 After salt fog exposure. The breaking strength of the finished camouflage cloth after being subjected to 300 hours of 5 percent solution salt spray (fog) exposure shall be not less than 36 pounds for the machine direction and 18 pounds for the transverse direction.

3.6.4.5.7 After humidity. The breaking strength of the finished camouflage cloth after being subjected for 14 days to a temperature of 120° F, plus or minus 5° F, and 95 percent humidity as described in FED. TEST METHOD STD. No. 141, Method 6201, shall be not less than 36 pounds for the machine direction and 18 pounds for the transverse direction.

3.6.4.6 Flame resistance. Flame-resistant test specimens shall be self-extinguishing prior to burning of 60 percent of the specimen area when tested as specified in 4.6.2.2.6. Test specimens shall be fabricated from 12-inch x 12-inch incised (see Figure 4) color-coated cloth, attached to 12-inch x 12-inch net samples with hog rings. Spacing shall be as specified in 3.6.5. Two specimens shall be fabricated from each sampling for finished cloth (see 4.5.1.2.2) for each color represented. Specimens shall not be selected from the same roll.

3.6.4.7 Color. The color of the finished camouflage cloth shall be such that a plot of the trichromatic coefficients (x and y coordinates) shall fall within the applicable 2.0 NBS ellipse of Figures 10 through 16 and 19 through 23, and the apparent reflectance (Y) shall fall within the applicable tolerances specified in Figures 10 through 16 and 19 through 23 before exposure, after accelerated weathering, accelerated fading, after humidity exposure, after salt fog exposure, and after fungus resistance exposure. After environmental exposure (see 4.6.2.2.7.1 through 4.6.2.2.7.5), the trichromatic coefficients (x and y coordinates) of Woodland Color Nos. 1 and 2 of Table I shall fall within the applicable tolerances specified in Figures 17 and 18 and the apparent reflectance (Y) shall fall within the applicable tolerances specified in Figures 17 and 18. After environmental exposure, the trichromatic coefficients and the apparent reflectance of Woodland Color No. 3 of Table I shall fall within the 2.25 NBS ellipse and applicable tolerance specified in Figure 12.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

3.6.4.8 Crocking. The finished camouflage cloth shall be good for wet and fair for dry as defined in FED. TEST METHOD STD. No. 191, Method 5051.

3.6.4.9 Specular gloss. The finished camouflage cloth shall have a specular gloss of not more than 1.0 gloss unit at 85 degrees and 2.0 gloss units at 60 degrees.

3.6.4.10 Spectal reflectance values. Separate samples of finished camouflage cloth before exposure, after accelerated weathering, after accelerated fading, salt fog exposure, after fungus resistance exposure, and after humidity shall have reflectance values within the limits shown in Table II. For Woodland Color Numbers 1 and 2 the spectral curve from 700 to 900 nanometers shall conform to Table III.

Table II. Color Reflectance in the Red and Infrared Spectal Regions

Color No.	Color Name	Infrared Reflectance Range 2/ 1/ Percent (max)	Percent (min)	Allowable Ratio 3/ (min)
Woodland				
1	Light Green	65.0	-	5.2
2	Dark Green	65.0	-	5.2
3	Forest Green	35.0	25.0	-
4	Olive	55.0	25.0	-
5	Khaki	75.0	40.0	-
6	Brown	25.0	20.0	-
7	Tan	55.0	35.0	-
Desert				
1	Khaki	60.0	25.0	-
2	Tan	60.0	35.0	-
3	Straw	60.0	35.0	-
4	Russet	40.0	20.0	-
5	Light Brown	45.0	25.0	-

1/ IR reflectance range to $BaSO_4$ or freshly smoked MgO.
2/ See Table V for wavelength definition.
3/ The ratio is calculated by dividing the value of the infrared spectral range by the value of the red spectal range (see Table V).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

3.6.4.11 Fungus resistance. The finished camouflage cloth shall not support fungus growth.

3.6.4.12 Tear strength. The tear strength of the finished camouflage cloth shall be not less than 6 pounds in the transverse direction.

3.6.5 Method of attachment. The incised camouflage cloth shall be attached to the treated nets with 5056-H18 aluminum rings having a nominal diameter wire of 0.062 inch. The expanded incised camouflage cloth shall be firmly attached at an average of one attachment every 6-3/4 inches for interior spacing and an average of 4-3/4 inches for edge spacing. The camouflage cloth shall be affixed to the net so as to extend beyond the edge-reinforcement cord a distance varying at random up to 3 inches. The attachment shall be located between knotted intersections on the net mesh and slippage shall be provided between the netting and the attachment to accommodate bias stretching.

3.7 Quick-connect-disconnect (QCD) devices.

3.7.1 Brackets and pins. The brackets and pins shall be fabricated from the material specified in 3.4.6 and as shown in Figures 24 and 25. The brackets and pins shall be ultraviolet light stabilized.

3.7.2 Lanyards. The lanyard cord shall be fabricated from the material specified in 3.4.7 and as shown in Figure 26, except the picks per inch shall be 4.0 to 5.0, the minimum breaking strength shall be 750 pounds, and the elongation shall be no more than 15 percent at a 500-pound load. Ends shall be fused to prevent unraveling. The lanyard shall be continuous for the length specified and shall have 25 pins installed and located as shown in Figure 26.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

Table III. Spectral Reflectance Limits for

Light Green and Dark Green Colors

Wavelength	% Reflectance		Wavelength	% Reflectance	
	(max)	(min)		(max)	(min)
600	10.2	-	760	59.5	40.0
610	9.8	-	770	61.5	42.0
620	9.8	-	780	-	42.0
630	9.8	-	790	-	42.0
640	9.5	-	800	-	42.0
650	9.5	-	810	-	42.0
660*	9.8	-	820	-	42.0
670*	12.0	4.0	830	-	42.0
680*	14.0	5.8	840	-	42.0
690	21.5	8.5	850	-	42.0
700	28.0	11.0	860	-	42.0
710	35.8	15.0	870	-	42.0
720	41.0	19.0	880	-	42.0
730	48.5	27.0	890	-	42.0
740	51.8	30.0	900	-	42.0
750	56.0	36.3			

*Values marked with asterisks are for light green cloth only. For dark green cloth, use the following values:

Wavelength	% Reflectance	
	(max)	(min)
660	9.5	-
670	10.0	4.0
680	13.0	5.8

3.7.3 Color. Color for the lanyards, brackets, and pins for woodland and desert shall conform to FED. STD. No. 595, Color No. 34087.

3.8 Cases. The transport case and the repair kit case shall be fabricated from the material specified in 3.4.4 and as shown in Figures 27 and 28.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:10Z
Check the source to verify that this is the current version before use.

3.8.1 Stitches and seams. Unless otherwise specified herein, stitches and seams shall conform to FED. STD. No. 751 of the following types: Stitches - Type 301; seams - Type SSa-1.

3.8.2 Color.

3.8.2.1 Woodland. Unless otherwise specified herein, the color of the materials used for fabrication of the transport case and repair kit case for the Woodland Screen shall conform to FED. STD. No. 595, Color No. 34087.

3.8.2.2 Desert. Unless otherwise specified herein, the color of the materials used for fabrication of the carrying case and repair kit case for the Desert Screen shall conform to FED. STD. No. 595, Color No. 30277.

3.9 Repair kit. Each camouflage screen shall be furnished with a repair kit packed in the repair kit case specified in 3.8. The repair kit shall contain the following items:

Item	Quantity	Reference
16 feet of edge-reinforcement cord	1	3.5.1
5 foot length of twine	6	3.4.1
Plastic straps	200	3.9.1
Pins	30	3.7
Brackets	30	3.7
Lanyard	1	3.7
1 square meter of garnished net [1]	1	3.5
Camouflage cloth [2]	1	3.6
Repair instruction sheet	1	3.10

1. Color/Texture
   A. Woodland - Dark green both sides with incising as shown in Figure 5.
   B. Desert - Khaki one side and tan one side with incising as shown in Figure 4.

2. Color/Texture
   A. Woodland - 5 square feet of each of the following:

      Dark Green/Dark Green - Figure 5 incising
      Forest Green/Brown - Figure 5 incising
      Light Green/Khaki - Figure 4 incising
      Olive/Tan - Figure 4 incising

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the current version before use.

B. Desert
10 square feet of Khaki/Tan - Figure 4 incising
10 square feet of Tan/Straw - Figure 4 incising
5 square feet of Light Brown/Russet - Figure 4 incising

3.9.1 Straps. Plastic straps used in the repair kit shall conform to MIL-S-23190, Type I, Class 1 or 2. Color shall be black.

3.10 Instruction sheets. The repair instruction sheet and the instruction sheet for erecting the camouflage screening system shall be vinyl sheet, 80-pound weight, and shall be olive drab color with white figures and lettering. The original art board for the repair instruction sheet and the instructions for erecting the screen will be loaned by the Government (see 6.6).

3.11 Identification marking. The completed garnished camouflage screen and carrying case shall be identified in accordance with MIL-STD-130. Identification tags shall be of a nylon-coated cloth as specified in 3.4.4. A tag shall be sewn to every other corner of a screen by wrapping an edge of the tag over the edge cord of the screen in such a manner that the stitching shall sew two thicknesses of the tag material to the edge cord. Identification tags for Type I screens shall be in accordance with Figure 33 and, for Type II screens, identification tags shall be in accordance with Figure 32. The identification tag shall be black vinyl ink lettering on an olive drab field. The nomenclature shall read "Camouflage Screening System (Class)" with the type of screen specified in bold type followed in smaller type with other information required by MIL-STD-130.

3.12 Workmanship. The finished screen and cases shall be clean and free from all foreign matter and shall be free from broken meshes and untied mesh connections. Patterns shall not be overstretched and stressed on netting. The QCD devices shall be smoothly finished and shall not be broken or malformed.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:10Z
Check the source to verify that this is the current version before use.

4.1.1 Component and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications, standards, and drawings, as applicable.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

(a) Preproduction inspection (see 4.3).
(b) Initial production inspection (see 4.4).
(c) Quality conformance inspection (see 4.5).
(d) Inspection comparison (see 4.7).
(e) Inspection of packaging (see 4.8).

4.3 Preproduction inspection.

4.3.1 Examination. The screen shall be examined as specified in 4.6.1. Presence of one or more defects shall be cause for rejection.

4.3.2 Tests. The screen shall be subjected to the tests marked "X" in Column 2 of Table IV. Samples for test for the net and finished cloth shall be representative of materials used to fabricate the screen. Unless otherwise indicated, test results shall be based upon the average of five specimens. Failure of any test shall be cause for rejection.

4.4 Initial production inspection. When specified (see 3.3), one or more initial production screens or samples of screen component materials will be selected at random by the Government from the screens being produced by production tooling and will be examined as specified in 4.6.1 and subjected to the tests marked "X" in Column 3 of Table IV to determine conformance to the requirements of this specification. The inspection will be performed by the Government at a site selected by the Government. Acceptance of an initial production screen shall not exclude the remaining screens from the quality conformance inspection and acceptance provisions specified in Section 4. In addition to any test specified as part of the initial production test, the Government reserves the right to conduct any and all other tests contained in this specification as part of the initial production test and failure of such additional tests shall have the same effect as failure of those tests specified as initial production tests.

4.4.1 Inspection failure. Failure of an initial production screen or samples of screen component materials to meet any requirement specified herein during and as a result of the examination and tests specified in 4.4 shall be cause for rejection of the initial production screen(s)

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:10Z
Check the source to verify that this is the currentversion before use.

and shall be cause for refusal by the Government to continue acceptance of production screens until evidence has been provided by the contractor that corrective action has been taken to eliminate the deficiences. Correction of such deficiencies shall be accomplished by the contractor at no cost to the Government on screens previously accepted and produced under the contract. Any deficiencies found as a result of the initial production inspection will be considered prima facie evidence that all screens accepted prior to the completion of initial production inspections are similarly deficient unless evidence to the contrary is furnished by the contractor and such evidence is acceptable to the contracting officer.

4.5 Quality conformance inspection.

4.5.1 Sampling.

4.5.1.1 Unit of product. For the purpose of sampling for examination, a unit of product shall be one complete screen of the type, as specified.

4.5.1.1.1 For examination. Sampling shall be in accordance with MIL-STD-105, Inspection Level S-4.

4.5.1.2 For tests.

4.5.1.2.1 Sampling for nets, Plan A. Samples of netting sufficient for testing shall be furnished from no more than 100,000 square yards of net.

4.5.1.2.1.1 Sampling for nets, Plan B. In addition to sampling specified in 4.5.1.2.1, one unit out of every 20,000 units shall be tested as specified in 4.5.3.1.2.

4.5.1.2.2 Sampling for finished cloth.

4.5.1.2.2.1 Sampling for finished cloth, Plan A. Samples of finished cloth sufficient for testing shall be furnished from no more than 50,000 square yards for each color of finished cloth.

4.5.1.2.2.2 Sampling for finished cloth, Plan B. In addition to sampling specified in 4.5.1.2.2.1, one unit out of every 20,000 units shall be tested as specified in 4.5.3.2.2.

4.5.2 Examination. Samples selected in accordance with 4.5.1.1.1 shall be examined for the defects listed in 4.6.1. AQL shall be 4.0 percent defective.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:10Z
Check the source to verify that this is the currentversion before use.

4.5.2.1 Sampling for aluminum fasteners. Samples of aluminum fasteners shall be 200 for a hexagon screen and 100 for a diamond screen. Non-conformance of more than 10 percent shall be cause for rejection.

4.5.3 Tests.

4.5.3.1 Nets.

4.5.3.1.1 Nets, Plan A. Samples selected in accordance with 4.5.1.2.1 shall be subjected to the tests marked "X" in Column 4 of Table IV. Failure of any test shall be cause for rejection of the represented nets.

4.5.3.1.2 Nets, Plan B. Samples selected in accordance with 4.5.1.2.1.1 shall be tested as specified in 4.6.2.1.

4.5.3.2 Finished cloth.

4.5.3.2.1 Finished cloth, Plan A. Samples selected in accordance with 4.5.1.2.2.1 shall be subjected to the tests marked "X" in Column 4 of Table IV. Failure of any test shall be cause for rejection of the represented finished cloth.

4.5.3.2.2 Finished cloth, Plan B. Samples selected in accordance with 4.5.1.2.2.2 shall be tested as specified in 4.6.2.2.

4.6 Inspection procedures.

4.6.1 Examination. The screen shall be examined as specified herein for the following defects:

Major

101. Materials not as specified.
102. Components missing, not as specified, or damaged.
103. Dimensions not as specified.
104. Colors not as specified.
105. Color-texture patterns for camouflage screen not as specified.
106. Color uniformity not as specified.
107. Color migration from side to side.
108. Mesh size not as specified.
109. Fabrication of edge-reinforcement not as specified.
110. Attachments not as specified.
111. Holes in screen larger than specified.
112. Incising not as specified.
113. Repair kit not as specified.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:10Z
Check the source to verify that this is the currentversion before use.

114. Severed strand of edge cord.
115. Delamination of the color compounds from the base cloth.
116. Incorrect assembly.
117. Stitching not as specified.
118. Missing or malformed aluminum ring attachments.
119. Surface interruptions larger than specified or more than specified.

Minor

201. Corner location patches not as specified.
202. Net incorrectly folded.
203. Identification marking missing, incorrect or illegible.
204. Workmanship not as specified.

4.6.2 Tests. Unless otherwise specified herein, test results shall be based on the average of five samples or specimens.

4.6.2.1 Treated nets.

4.6.2.1.1 Weight increase. Weight increase of the treated net mesh shall be determined in accordance with FED. TEST METHOD STD. No. 191, Method 5401, except specimens shall be 1 square yard of net. Nonconformance to 3.5.5 shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:10Z
Check the source to verify that this is the currentversion before use.

Table IV. Test Schedule

Type of inspection						
Inspection Sequence	Preproduction	Initial Production	Quality Conformance	Test	Test Paragraph	Requirement Paragraph
1	2	3	4	5	6	7
A.				Treated Nets		
1.	X	-	-	Weight increase	4.6.2.1.1	3.5.5
2.	X	X	X	Weight increase after water immersion	4.6.2.1.2	3.5.5.1
3.	X	X	X	Breaking strength	4.6.2.1.3	3.5.5.2
4.	X	-	-	After accel. weathering	4.6.2.1.3.1	3.5.5.2.1
5.	X	-	-	After accel. aging	4.6.2.1.3.2	3.5.5.2.2
6.	X	-	-	After water immersion	4.6.2.1.3.3	3.5.5.2.3
7.	X	-	-	After petroleum immersion	4.6.2.1.3.4	3.5.5.2.4
8.	X	-	-	After salt fog exposure	4.6.2.1.3.5	3.5.5.2.5
9.	X	X	-	Stiffness	4.6.2.1.4	3.5.5.3
10.	X	X	-	Solubility	4.6.2.1.5	3.5.5.4
11.	X	X	-	Flame resistance	4.6.2.1.6	3.5.5.5
12.	X	X	-	Fungus resistance	4.6.2.1.7	3.5.5.6
B.				Finished Cloth		
1.	X	-	-	Weight increase after processing	4.6.2.2.1.1	3.6.4
2.	X	X	X	Weight increase after water immersion	4.6.2.2.1.2	3.6.4.1
3.	X	X	-	Stiffness	4.6.2.2.2	3.6.4.2
4.	X	X	-	Tackiness	4.6.2.2.3	3.6.4.3
5.	X	X	-	Solubility	4.6.2.2.4	3.6.4.4
6.	X	X	X	Breaking strength	4.6.2.2.5	3.6.4.5
7.	X	-	-	After accel. weathering	4.6.2.2.5.1	3.6.4.5.1
8.	X	-	-	After accel. aging	4.6.2.2.5.2	3.6.4.5.2
9.	X	-	-	After accel. fading	4.6.2.2.5.3	3.6.4.5.3
10.	X	-	-	After water immersion	4.6.2.2.5.4	3.6.4.5.4

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:10Z
Check the source to verify that this is the currentversion before use.

Navy - Bureau of Ships

Table IV. Test Schedule - (Cont'd)

1	2	3	4	5	6	7
11.	X	-	-	After petroleum immersion	4.6.2.2.5.5	3.6.4.5.5
12.	X	-	-	After salt fog	4.6.2.2.5.6	3.6.4.5.6
13.	X	-	-	After humidity	-	3.6.4.5.7
14.	X	X	X	Flame resistance	4.6.2.2.6.1	3.6.4.6
15.	X	-	-	After accel. weathering	4.6.2.2.6.2	3.6.4.6
16.	X	-	-	After accel. fading	4.6.2.2.6.3	3.6.4.6
17.	X	-	-	After leaching.	4.6.2.2.6.4	3.6.4.6
18.	X	X	X	Color	4.6.2.2.7	3.6.4.7
19.	X	-	-	After accel. weathering	4.6.2.2.7.1	3.6.4.7
20.	X	-	-	After accel. fading	4.6.2.2.7.2	3.6.4.7
21.	X	-	-	After humidity	4.6.2.2.7.3	3.6.4.7
22.	X	-	-	After salt fog	4.6.2.2.7.4	3.6.4.7
23.	X	-	-	Fungus resistance	4.6.2.2.7.5	3.6.4.7
24.	X	X	-	Crocking	4.6.2.2.8	3.6.4.8
25.	X	X	X	Specular gloss	4.6.2.2.9	3.6.4.9
26.	X	X	X	Spectral reflectance	4.6.2.2.10	3.6.4.10
27.	X	-	-	After accel.weathering	4.6.2.2.10.4	3.6.4.10
28.	X	-	-	After accel. fading	4.6.2.2.10.5	3.6.4.10
29.	X	-	-	After salt fog	4.6.2.2.10.6	3.6.4.10
30.	X	-	-	After fungus resistance	4.6.2.2.10.7	3.6.4.10
31.	X	-	-	After humidity	-	3.6.4.10
32.	X	X	-	Fungus resistance	4.6.2.2.11	3.6.4.11
33.	X	X	X	Tear strength	4.6.2.2.12	3.6.4.12
34.	X	-	X	Radar properties (Type II cloth)	4.6.2.2.13	3.6.2.1

4.6.2.1.2 Weight increase after water immersion. Weight increase of the treated net mesh after immersion in water shall be determined in accordance with ASTM Test Method D 471 except the specimens shall not be dipped into acetone. The cut ends of the specimens shall be sealed. Three specimens, each approximately 2-1/2 inches x 2-1/2 inches, shall be tested for weight increase after the treated net has been immersed in a container of distilled water for 24 hours at 73° F, plus or minus 2° F. Nonconformance to 3.5.5.1 shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

4.6.2.1.3 Breaking strength. The breaking strength of the treated net mesh shall be tested in accordance with FED. TEST METHOD STD. No. 191, Method 5102, with modifications as specified herein. The test specimens shall consist of one finished square mesh complete with four knots and cut from the net with a minimum of 1/2-inch extra twine past the knots. The specimen holding device as shown in Figure 31 shall consist of either rods or hooks of 5/16-inch diameter and of sufficient length to avoid slippage of the net mesh while testing. The rods or hooks shall have round and smooth surfaces. The gage length shall be 3 inches at the start of the test. The test specimen shall be placed on the rods or hooks as shown in Figure 31. Nonconformance to 3.5.5.2 shall constitute failure of this test.

4.6.2.1.3.1 After accelerated weathering. The treated net shall be conditioned in accordance with ASTM G 26 and tested as specified in 4.6.2.1.3. Nonconformance to 3.5.5.2.1 shall constitute failure of this test.

4.6.2.1.3.2 After accelerated aging. The treated net shall be tested in accordance with FED. TEST METHOD STD. No. 191, Method 5851, and 4.6.2.1.3. Nonconformance to 3.5.5.2.2 shall constitute failure of this test.

4.6.2.1.3.3 After water immersion. The treated net mesh shall be immersed in distilled water for 24 hours at 160° F, plus or minus 2° F, and tested as specified in 4.6.2.1.3. Nonconformance to 3.5.5.2.3 shall constitute failure of this test.

4.6.2.1.3.4 After petroleum immersion. The treated net shall be tested in accordance with FED. TEST METHOD STD. No. 601, Method 6001 and 4.6.2.1.3. Nonconformance to 3.5.5.2.4 shall constitute failure of this test.

4.6.2.1.3.5 After salt fog exposure. The treated net mesh shall be tested in accordance with FED. TEST METHOD STD. No. 141, Method 6061, and 4.6.2.1.3. Nonconformance to 3.5.5.2.5 shall constitute failure of this test.

4.6.2.1.4 Stiffness. The stiffness of a sample piece of treated twine shall be tested in accordance with the test method specified in 4.6.2.1.4.1. Specimens shall be tested at standard conditions and after exposure for 94 hours, plus or minus 1 hour, in a chamber maintained at minus 40° F, plus or minus 2° F. Nonconformance to 3.5.5.3 shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

4.6.2.1.4.1 Torsional stiffness ratio.

4.6.2.1.4.1.1 Test specimens. Test specimens shall be 2-inch samples of treated twine.

4.6.2.1.4.1.2 Test apparatus. The test apparatus shall be a Gehman torsional tester conforming to FED. TEST METHOD STD. No. 601, Method 5611, except that only the torsion apparatus, the stand, and a suitable bracket to hold the lower clamp are required. A beryllium-copper-type tension wire of appropriate torsion constant shall be used.

4.6.2.1.4.1.3 Test procedure. The test procedure shall be as follows:

(a) With the specimen and the test apparatus at 73° F plus or minus 5° F, the lower end of the specimen shall be secured in the rigidly mounted clamps of the test apparatus and the upper end shall be secured in the upper pinch clamp attached to the lower end of the torsional wire.
(b) The pointer shall be adjusted to the zero position by rotating the protractor scale. The torsional head shall be turned 180 degrees, and the pointer reading shall be recorded after a period of 10 seconds.
(c) After conducting the tests specified in (a) and (b), the specimen shall be placed in a chamber with an atmosphere of air or a mixture of air and carbon dioxide at minus 40° F, plus or minus 2° F, for 94 hours, plus or minus 1 hour. The torsional apparatus and tongs for handling specimens shall be conditioned in the chamber for not less than 2 hours before use.
(d) The tests specified in (a) and (b) shall be repeated while specimens and apparatus are still in the conditioning chamber at minus 40° F, plus or minus 2° F.

4.6.2.1.4.1.4 Calculations. The tests shall be conducted on three specimens and the results shall be averaged. The torsional stiffness ratio at minus 40° F shall be calculated by means of the following formula:

$$\text{Torsional Stiffness Ratio at } -40^\circ \text{ F} = \frac{\text{Torsional Stiffness Factor at } -40^\circ \text{ F}}{\text{Torsional Stiffness Factor at } 73^\circ \text{ F}}$$

Where Torsional Stiffness Factor =

$$\frac{180 \text{ degrees} - \text{angle of twist of specimen}}{\text{angle of twist of specimen}}$$

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

4.6.2.1.5 Solubility. A 6-inch square specimen of the finished net shall be immersed for 24 hours in a 400 cubic centimeter glass beaker filled with distilled water at a temperature of 160° F, plus or minus 10° F. Nonconformance to 3.5.5.4 shall constitute failure of this test.

4.6.2.1.6 Flame resistance. The flame resistance of the finished treated net mesh twine shall be tested in accordance with FED. TEST METHOD STD. No. 191, Method 5903, except specimen shall be one length of net twine and knots sufficient to test in specified apparatus. Nonconformance to 3.5.5.5 shall constitute failure of this test.

4.6.2.1.7 Fungus resistance. The treated net mesh shall be tested in accordance with FED. TEST METHOD STD. No. 191, Method 5750, except that the test organism shall be aspergillus niger ATCC No. 6275 or QM 458 (see 6.5). Failure to conform to 3.5.5.6 shall constitute failure of this test.

4.6.2.2 Finished cloth.

4.6.2.2.1 Weight increase.

4.6.2.2.1.1 Weight increase after processing. Weight increase of the finished cloth shall be tested in accordance with FED. TEST METHOD STD. No. 191, Method 5041. Three specimens for each test, each 2 inches square, shall be used. Nonconformance to 3.6.4 shall constitute failure of this test.

4.6.2.2.1.2 Weight after water immersion. Weight of the finished cloth after immersion in water shall be determined in accordance with ASTM D 471, except the specimens shall not be dipped into acetone. Ten specimens, each 2 inches square, shall be tested for weight increase after the finished cloth has been immersed in a container of distilled water for 24 hours at 73° F, plus or minus 2° F. Nonconformance to 3.6.4.1 shall constitute failure of this test.

4.6.2.2.2 Stiffness. The stiffness of the finished cloth shall be tested in accordance with FED. TEST METHOD STD. No. 191, Method 5204. Specimens shall be tested after exposure for 94 hours, plus or minus 1 hour, in a chamber at minus 40° F. For finished cloth manufactured with polyvinyl chloride plastisol materials, the minus 40° F exposure time may be reduced to 2 hours minimum. Nonconformance to 3.6.4.2 shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

4.6.2.2.3 Tackiness. The finished cloth shall be tested in accordance with FED. TEST METHOD STD. No. 406, Method 1131. A specimen of finished cloth, 2 x 6 inches, shall be conditioned for 3 hours at 100° F, plus or minus 5° F, and 95 to 100 percent relative humidity. The cloth shall be folded and a pressure of 2 pounds per square inch shall be applied for a period of 4 hours at 180° F, plus or minus 5° F. Nonconformance to 3.6.4.3 shall constitute failure of this test.

4.6.2.2.4 Solubility. A 2- x 6-inch specimen of the finished cloth shall be immersed for 24 hours in a 400 cubic centimeter glass beaker filled with distilled water at a temperature of 70° F, plus or minus 10° F. Nonconformance to 3.6.4.4 shall constitute failure of this test.

4.6.2.2.5 Breaking strength. The breaking strength of the finished cloth shall be tested in accordance with ASTM D 1682, Grab Method. Nonconformance to 3.6.4.5 shall constitute failure of this test.

4.6.2.2.5.1 After accelerated weathering. The finished cloth shall be conditioned in accordance with ASTM G 26. Nonconformance to 3.6.4.5.1 shall constitute failure of this test.

4.6.2.2.5.2 After accelerated aging. The finished cloth shall be tested in accordance with FED. TEST METHOD STD. No. 191, Method 5851. Nonconformance to 3.6.4.5.2 shall constitute failure of this test.

4.6.2.2.5.3 After accelerated fading. The finished cloth shall be tested in accordance with FED. TEST METHOD STD. No. 191, Method 5660. Nonconformance to 3.6.4.5.3 shall constitute failure of this test.

4.6.2.2.5.4 After water immersion. The finished cloth shall be immersed in distilled water for 24 hours at 73° F, plus or minus 2° F, and tested as specified in 4.6.2.2.5. Nonconformance to 3.6.4.5.4 shall constitute failure of this test.

4.6.2.2.5.5 After petroleum immersion. The finished cloth shall be tested in accordance with FED. TEST METHOD STD. No. 601, Method 6001. Nonconformance to 3.6.4.5.5 shall constitute failure of this test.

4.6.2.2.5.6 After salt fog. The finished cloth shall be tested in accordance with FED. TEST METHOD STD. No. 141, Method 6061, 5-percent salt solution. Nonconformance to 3.6.4.5.6 shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

4.6.2.2.5.7 After humidity. The finished cloth shall be tested in accordance with FED. TEST METHOD STD. No. 141, Method 6201. Nonconformance to 3.6.4.5.7 shall constitute failure of this test.

4.6.2.2.6 Flame resistance. Samples selected in accordance with 3.6.4.6 shall be tested as specified herein. Each sample shall be hung from a horizontal support in such a manner that the entire 12- x 12-inch area is exposed. The middle of the bottom edge of the sample shall be positioned in the center of a 1-1/2-inch bunsen burner flame. The burner and fuel shall be as specified in FED. TEST METHOD STD. No. 191, Method 5903, Paragraphs 4.2, 4.3, and 4.4. The test shall be performed in a hooded area specified in Method 5903. The flame shall be applied as specified for 15 seconds then removed. Nonconformance of more than three of the specimens or two of the same color to meet the requirements of 3.6.4.6 shall constitute failure of this test.

4.6.2.2.6.1 Finished cloth, initially. The finished cloth shall be tested in accordance with 4.6.2.2.6. Nonconformance to 3.6.4.6 shall constitute failure of this test.

4.6.2.2.6.2 After accelerated weathering. The finished cloth shall be tested in accordance with ASTM G 26 for 300 hours and as specified in 4.6.2.2.6. Nonconformance to 3.6.4.6 shall constitute failure of this test.

4.6.2.2.6.3 After accelerated fading. The finished cloth shall be tested in accordance with FED. TEST METHOD STD. No. 191, Method 5660 and as specified in 4.6.2.2.6. Nonconformance to 3.6.4.6 shall constitute failure of this test.

4.6.2.2.6.4 After leaching. The finished cloth shall be tested by placing the specimens in 450 ml to 500 ml of distilled water for 24 hours at a temperature of 120° F, plus or minus 5° F. After leaching, the specimens shall be dried at room temperature for 8 hours and then conditioned at 120° F for 40 hours. The specimens shall then be tested in accordance with 4.6.2.2.6. Nonconformance to 3.6.4.6 shall constitute failure of this test.

4.6.2.2.7 Color. The finished cloth shall be tested for color in accordance with FED. TEST METHOD STD. No. 141, Method 4251, using Standard Illuminant C. For the color test, the average of the measurements for six samples shall be used, the average of which shall meet requirements indicated in Figures 10 through 27. However, for Figures 10 through 16, and 19 through 23, two of the six samples may fall within 2.25 NBS units from the center value. Nonconformance to 3.6.4.7, Table I, and Figures 10 through 23 shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

4.6.2.2.7.1 After accelerated weathering. The finished cloth shall be tested in accordance with ASTM G 26 for 300 hours and as specified in 4.6.2.2.7. Nonconformance to 3.6.4.7 shall constitute failure of this test.

4.6.2.2.7.2 After accelerated fading. The finished cloth shall be tested in accordance with FED. TEST METHOD STD. No. 191, Method 5660, for 150 hours and as specified in 4.6.2.2.7. Nonconformance to 3.6.4.7 shall constitute failure of this test.

4.6.2.2.7.3 After humidity. The finished cloth shall be tested in accordance with FED. TEST METHOD STD. No. 141, Method 6201, for 14 days at 120° F, plus or minus 5° F, and not less than 95 percent humidity, and as specified in 4.6.2.2.7. Nonconformance to 3.6.4.7 shall constitute failure of this test.

4.6.2.2.7.4 After salt fog. The finished cloth shall be tested in accordance with FED. TEST METHOD STD. No. 141, Method 6061, using a 5-percent salt solution for 300 hours and as specified in 4.6.2.2.7. Nonconformance to 3.6.4.7 shall constitute failure of this test.

4.6.2.2.7.5 After fungus resistance. The finished cloth shall be tested in accordance with FED. TEST METHOD STD. No. 191, Method 5750, except that the test organism shall be aspergillus niger ATCC No. 6275 or QM 458 (see 6.5), and as specified in 4.6.2.2.7. Nonconformance to 3.6.4.7 shall constitute failure of this test.

4.6.2.2.8 Crocking. The finished cloth shall be tested in accordance with FED. TEST METHOD STD. No. 191, Method 5651 wet and dry, Method B, requirement of good for wet and fair for dry. Nonconformance to 3.6.4.8 shall constitute failure of this test.

4.6.2.2.9 Specular gloss. The specular gloss of the finished cloth shall be tested in accordance with FED. TEST METHOD STD. No. 141, Methods 6101 and 6103. Two measurements for each requirement shall be made oriented 90 degrees to each other and averaged. Nonconformance to 3.6.4.9 shall constitute failure of this test.

4.6.2.2.10 Spectral reflectance. The finished cloth shall be tested in accordance with FED. TEST METHOD STD. No. 141, Method 6241 or 6242. The ordinates to be used shall be those given in Table V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

6. Shade buttons within the envelope dimension.

4.6.2.2.10.1 Spectrophotometer method. If Method 6241 is used, red and infrared reflectance values shall be obtained by averaging the reflectance percentage measured at wavelength ordinates given in Table V.

4.6.2.2.10.2 Reflectometer method. If Method 6242 is used, a Wratton No. 88 or 89B filter and calibrated neutral standards shall be used with the instrument.

Table V. Selected Ordinates for Determining Infrared and Red Reflectance Values from Spectrophotometric Curves

Ordinates		
Red Region (Nanometers)	Infrared Region (Nanometers)	
	714.0	793.0
620.0	725.0	797.0
626.0	730.0	802.0
638.0	737.0	807.0
645.0	742.0	811.0
649.0	747.0	816.0
652.0	751.0	821.0
653.0	756.0	826.0
655.0	760.0	831.0
658.0	764.0	836.0
663.0	769.0	842.0
	773.0	848.0
	777.0	855.0
	783.0	862.0
	787.0	873.0

4.6.2.2.10.3 Report of results. Two determinations shall be made on each sample: One determination of the sample shall be made; and one determination of the sample shall be made again with the sample rotated 90 degrees in position. For each sample, the average of the two determinations shall be reported.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

4.6.2.2.10.4 After accelerated weathering. The finished cloth shall be tested in accordance with ASTM G 26 for 300 hours and as specified in 4.6.2.2.10. Nonconformance to 3.6.4.10 shall constitute failure of this test.

4.6.2.2.10.5 After accelerated fading. The finished cloth shall be tested in accordance with FED. TEST METHOD STD. No. 191, Method 5660 for 150 hours and as specified in 4.6.2.2.10. Nonconformance to 3.6.4.10 shall constitute failure of this test.

4.6.2.2.10.6 After salt fog. The finished cloth shall be tested in accordance with FED. TEST METHOD STD. No. 141, Method 6061, using a 5-percent salt solution for 300 hours and as specified in 4.6.2.2.10. Nonconformance to 3.6.4.10 shall constitute failure of this test.

4.6.2.2.10.7 After fungus resistance. The finished cloth shall be tested in accordance with FED. TEST METHOD STD. No. 191, Method 5750, except that the test organism shall be aspergillus niger ATCC No. 6275 or QM 458 (see 6.5) and as specified in 4.6.2.2.10. Nonconformance to 3.6.4.10 shall constitute failure of this test.

4.6.2.2.10.8 After humidity. The finished cloth shall be tested in accordance with FED. TEST METHOD STD. No. 141, Method 6201 for 14 days at 120° F, plus or minus 5° F, and 95 percent humidity, and as specified in 4.6.2.2.10. Nonconformance to 3.6.4.10 shall constitute failure of this test.

4.6.2.2.11 Fungus resistance. The finished cloth shall be tested in accordance with FED. TEST METHOD STD. No. 191, Method 5750, except that the test organism shall be aspergillus niger ATCC No. 6275 or QM 458 (see 6.5). Nonconformance to 3.6.4.11 shall constitute failure of this test.

4.6.2.2.12 Tear strength. The finished cloth shall be tested in accordance with FED. TEST METHOD STD. No. 191, Method 5136, trapezoid tear. Nonconformance to 3.6.4.12 shall constitute failure of this test.

4.6.2.2.13 Radar properties for cloth. The finished cloth, Type II, shall be 100 percent tested. Nonconformance of more than 5 percent of a roll of the material to meet the requirements of 3.6.2.1 shall constitute failure of the test and all defective cloth above 5 percent shall be removed. No more than 7000 square yards of material shall constitute a roll.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

4.7 Inspection comparison. The Government may select screens and samples of screen component materials at any time during the contract production period and subject these samples to the examination specified in 4.6.1 and the tests marked "X" in Column 3 of Table IV to determine conformance to the requirements of this specification. The inspection will be performed by the Government, at a site selected by the Government, on units selected at random from those which have been accepted by the Government and will not include the previously inspected preproduction model and initial production screens. In addition to any test specified as part of the inspection comparison, the Government reserves the right to conduct any and all other tests contained in this specification as part of the inspection comparison and failure of such additional tests shall have the same effect as failure of those tests specified as inspection comparison.

4.7.1 Inspection failure. Failure of an inspection comparison screen or sample of screen component materials to meet any requirement specified herein during and as a result of the examination and tests specified in 4.7 shall be cause for rejection of the inspection comparison screen(s) and shall be cause for refusal by the Government to continue acceptance of production screens until evidence has been provided by the contractor that corrective action has been taken to eliminate the deficiencies. Correction of such deficiencies shall be accomplished by the contractor at no cost to the Government on screens previously accepted and produced under the contract. Any deficiencies found as a result of the inspection comparison will be considered prima facie evidence that all screens accepted prior to the completion of inspection comparison are similarly deficient unless evidence to the contrary is furnished by the contractor and such evidence is acceptable to the contracting officer.

4.8 Inspection of packaging.

4.8.1 Quality conformance inspection of pack.

4.8.1.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.8.1.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the current version before use.

4.8.1.3 Examination. Samples selected in accordance with 4.8.1.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

120.	Components not contained within the cases as specified for Level A, B, or Commercial.
121.	Screens not folded as specified for Level A, B, or Commercial.
122.	Transport case with all components inclosed not sealed in a bag as specified for Level A or B.
123.	Box not as specified for Level A or B.
124.	Box closure not as specified for Level A or B.
125.	Quantities packed together not as specified for Level A or B.
126.	Pallet not as specified for Level A or B.
127.	Strapping not as specified for Level A or B.
128.	Strapping not applied as specified for Level A or B.
129.	Edge protectors not applied as specified for Level A or B.
130.	Marking missing, illegible, incorrect, or incomplete for Level A, B, or Commercial.

5. PACKAGING

5.1 Preservation. Preservation shall be Level A, B, or Commercial, as specified (see 6.2).

5.1.1 Level A. The repair kit components shall be placed in the repair kit case. Each screen shall be folded as shown in Figure 29 or 30. The repair kit case, folded screen, and all other components required for one complete screening system shall be placed in the transport case. Each transport case shall be placed in a polyethylene bag fabricated from material conforming to L-P-378, Type I, Class I, Grade C, Finish I, film thickness 0.006 inch. The bag shall be tightly compressed around the transport case by vacuum, and the bag closed by heat sealing. The bag containing the screening system shall then be placed in a close-fitting box (approximately 48 inches x 24 inches x 7 inches) conforming to PPP-B-636, V3s, Style FTC-L. The box shall be closed and sealed as specified for Method V in the appendix to the box specification.

5.1.2 Level B. Each complete screening system shall be preserved as specified in 5.1.1, except the box shall conform to PPP-B-636, Type CF, Class Domestic, Variety SW, Grade 275, Style FTC-L. Box closure shall be in accordance with the appendix to the box specification.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:10Z
Check the source to verify that this is the currentversion before use.

5.1.3 Commercial. Commercial preservation shall be in accordance with FED. STD. No. 356 and, in addition, the components shall be placed in the cases and the screen folded as specified in 5.1.1.

5.2 Packing. Packing shall be Level A or Commercial, as specified (see 6.2).

5.2.1 Level A. Five screening systems, preserved as specified in 5.1, shall be packed together on a commercial-type, wooden expendable pallet. The pallet shall be constructed with top and bottom deck boards and in a manner so that the strapping, when applied for securing the load, shall not be subject to damage from skidding or forklift handling. The pallet length and width shall be approximately the same as the dimensions of the box containing the screening system. The boxes shall be secured to the pallet with three straps conforming to QQ-S-781, Type I or IV, regular duty, Size 1/2 inch with a minimum thickness of 0.015 inch; and, unless otherwise specified herein, shall be Finish B. When specified (see 6.2), Finish A strapping shall be used. Style of seals shall be optional. One strap shall be applied lengthwise and two straps girthwise. The lengthwise strap shall be placed in the center and the girthwise strap shall be placed approximately 10 inches from the parallel box edge. Edge protectors shall be placed between the box edge and the strap.

5.2.2 Commercial. Commercial packing shall be in accordance with FED. STD. No. 356.

5.3 Marking.

5.3.1 Military agencies. Marking shall be in accordance with MIL-STD-129.

5.3.2 Commercial. Marking shall be in accordance with FED. STD. No. 356.

6. NOTES

6.1 Intended use. The camouflage screening system is intended for use as temporary or semipermanent concealment of various types of tactical equipment and field installations from hostile, visual, radar, and infrared observations.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Type and class required (see 1.2).
(c) When the Government will conduct any or all of the preproduction model examination and tests. When the Government will conduct some but not all of the preproduction examination and tests, the contracting officer should specify which examination and tests will be conducted by the Government and which examination and tests shall be conducted by the contractor (see 3.2).
(d) Time frame required for submission of preproduction model and number of screens required (see 3.2).
(e) Necessary samples required (see 3.2 and 4.3.2).
(f) When initial production testing is required and number of complete screens to be furnished (see 3.3).
(g) Preservation and packaging required (see 5.1 and 5.2).
(h) When other than Finish B strapping is required (see 5.2.1).

6.3 Preproduction model. Any changes or deviations of production screens from the approved preproduction model during production will be subject to the approval of the contracting officer. Approval of the preproduction model will not relieve the contractor of his obligation to furnish screens conforming to this specification.

6.4 Government tooling. The contracting officer should arrange to furnish the following Government-owned tooling in the quantities indicated for producing the screening system:

Description	Quantity
Matrix Distribution Machine	1
Cut and Incise Machine	1
Pattern Dies	13
Incising Dies	2
Garnish Attach Machines (With Ring Attach Guns)	4
Pin to Lanyard Machine	1
Bracket to Net Machine	1
Folding Tables	2
Repair Kit Assembly Equipment	1
Packaging Equipment	1
Microwave Monitor for Color-Coated Cloth	1

Information concerning Government tooling may be obtained by contacting the Commander, U.S. Army Mobility Equipment Research and Development Command, ATTN: DRXFB-MB, Ft. Belvoir, VA 22060.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the current version before use.

6.5 Fungus. Cultures of the organism used in the fungus resistance test specified in 4.6.2.1.7, 4.6.2.2.7.5, 4.6.2.2.10.7, and 4.6.2.2.11 may be obtained from the Department of Botany, ATTN: Dr. Emmory G. Simmons, University of Massachusetts, Amherst, MA 01002.

6.6 Government-loaned property. The contracting officer should arrange to loan the original art boards specified in 3.10. Information concerning these boards may be obtained by contacting the Commander, U.S. Army Mobility Equipment Research and Development Command, ATTN: DRXFB-MB, Ft. Belvoir, VA 22060.

Custodian:


Army - ME

Preparing activity:

Army - ME

Project No. 1080-A048

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

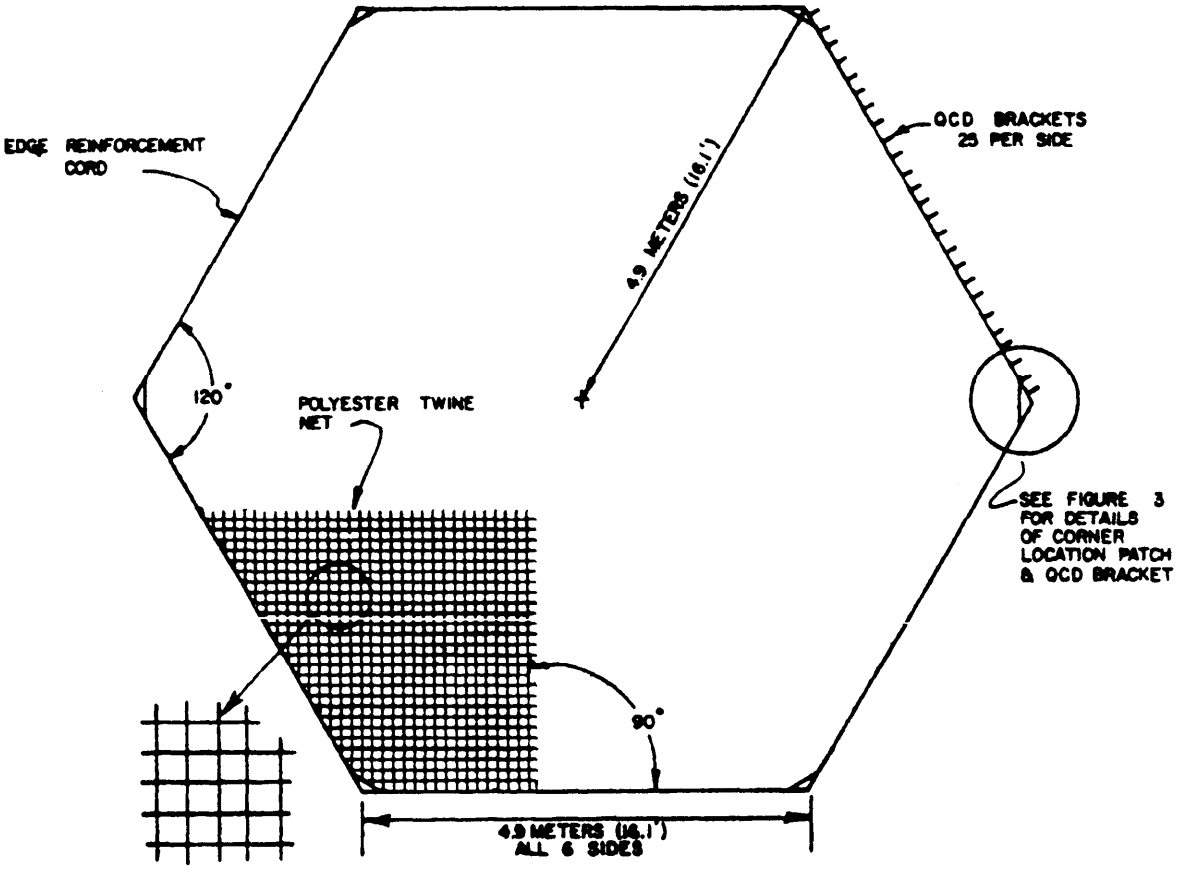


NOTE: DIMENSIONAL TOLERANCE SHALL BE ± 2% PER SIDE WHEN A SIDE IS MEASURED UNDER 20 lbs TENSION.

FIGURE 1. HEXAGON NET

X-2561

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

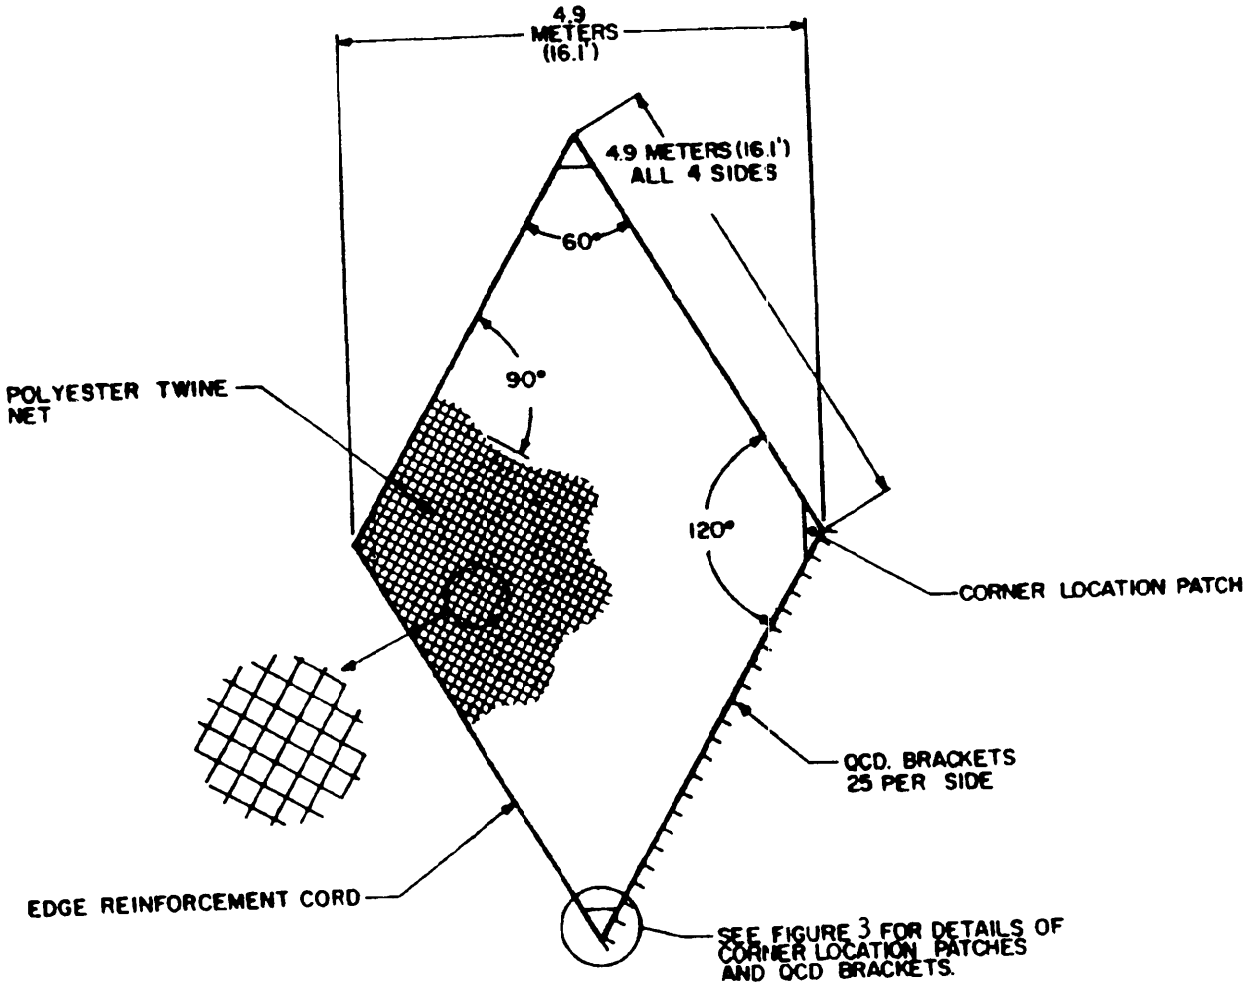


NOTE:
DIMENSIONAL TOLERANCE SHALL BE ± 2% PER SIDE WHEN A SIDE IS MEASURED UNDER 20 LBS. TENSION.


FIGURE 2. RHOMBIC NET.

X-2562

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

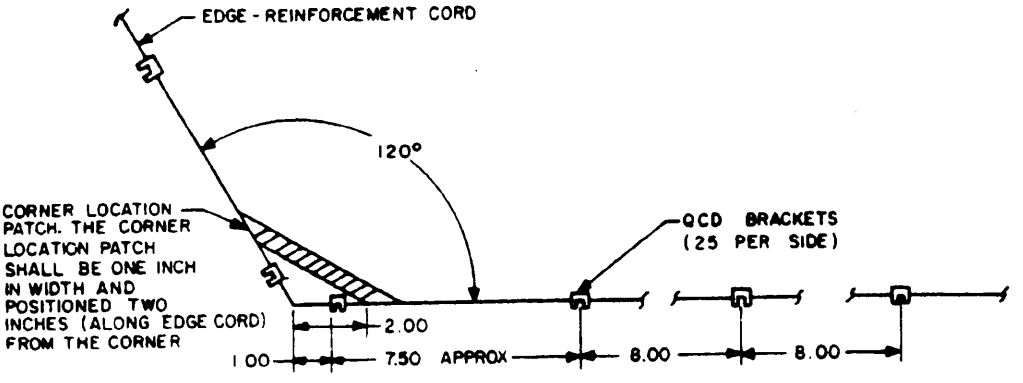

120° CORNER DETAIL

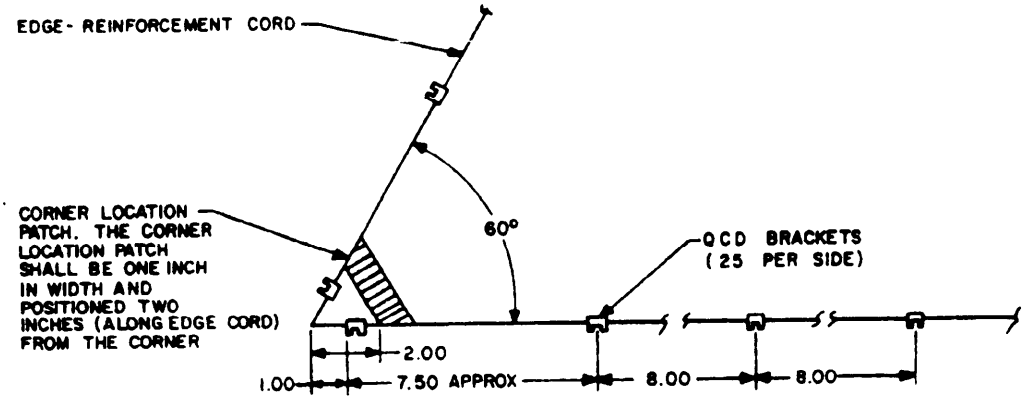

60° CORNER DETAIL

NOTES:

1. ALL DIMENSIONS ARE IN INCHES
2. TOLERANCE: ±.25
3. TOLERANCE ON DIMENSIONS LOCATING QCD BRACKETS APPLY AT THE TIME OF ATTACHMENT OF BRACKETS TO THE NET

FIGURE 3. DETAIL CORNER LOCATION PATCH AND Q.C.D. BRACKETS

X-2563B

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the current version before use.

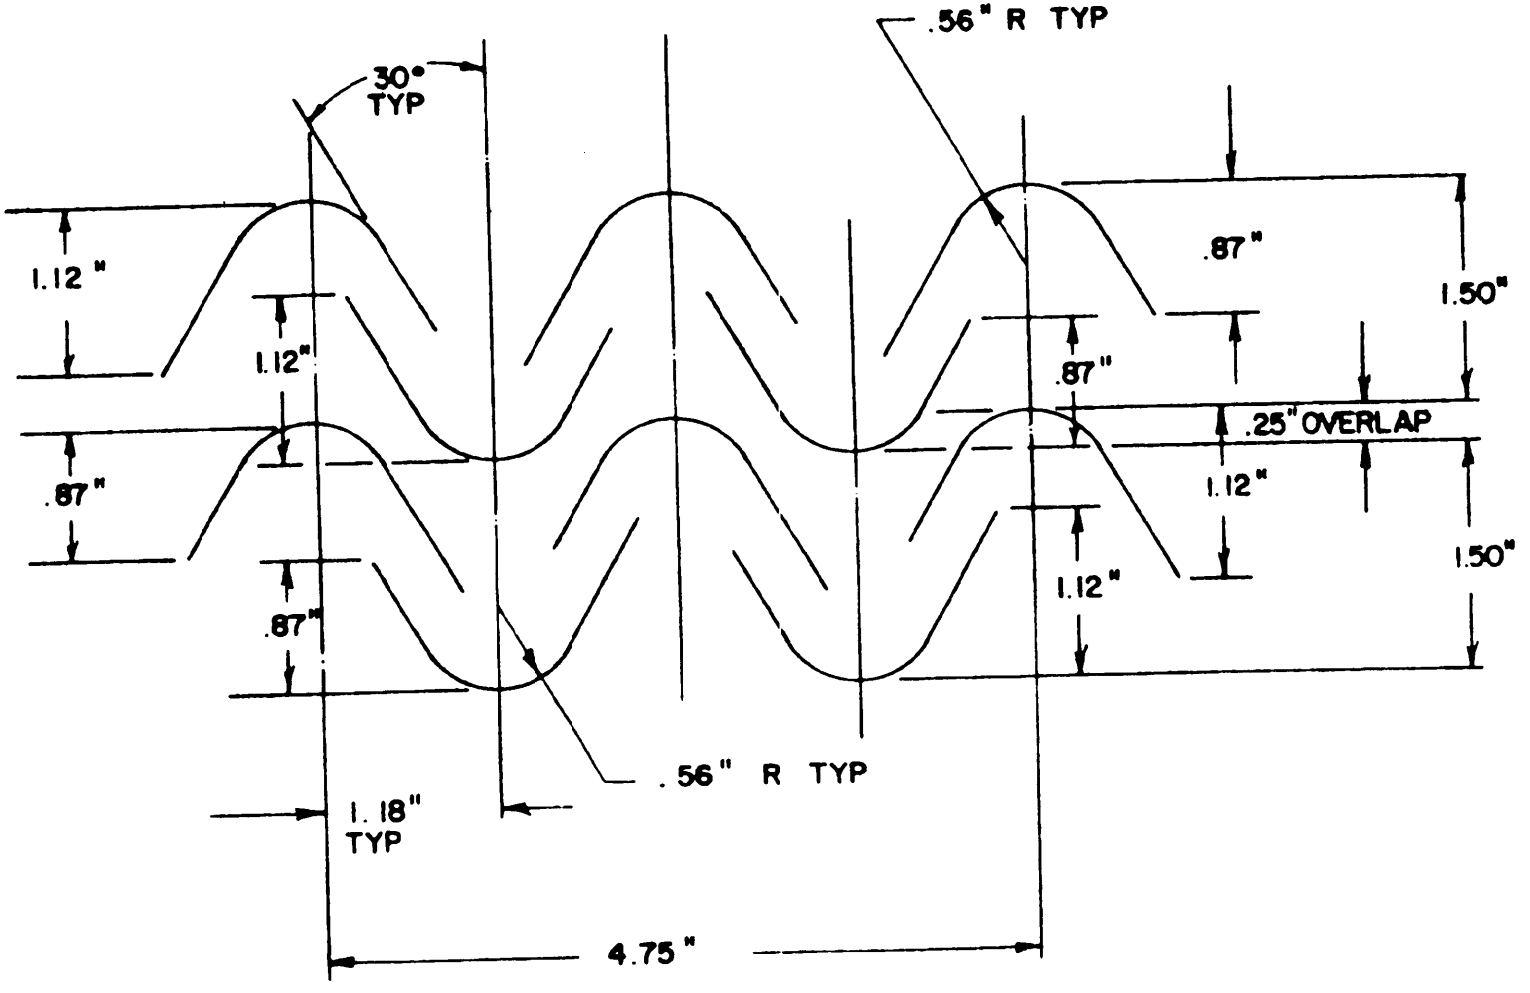


FIGURE 4. INCISING PATTERN

X-2564

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.


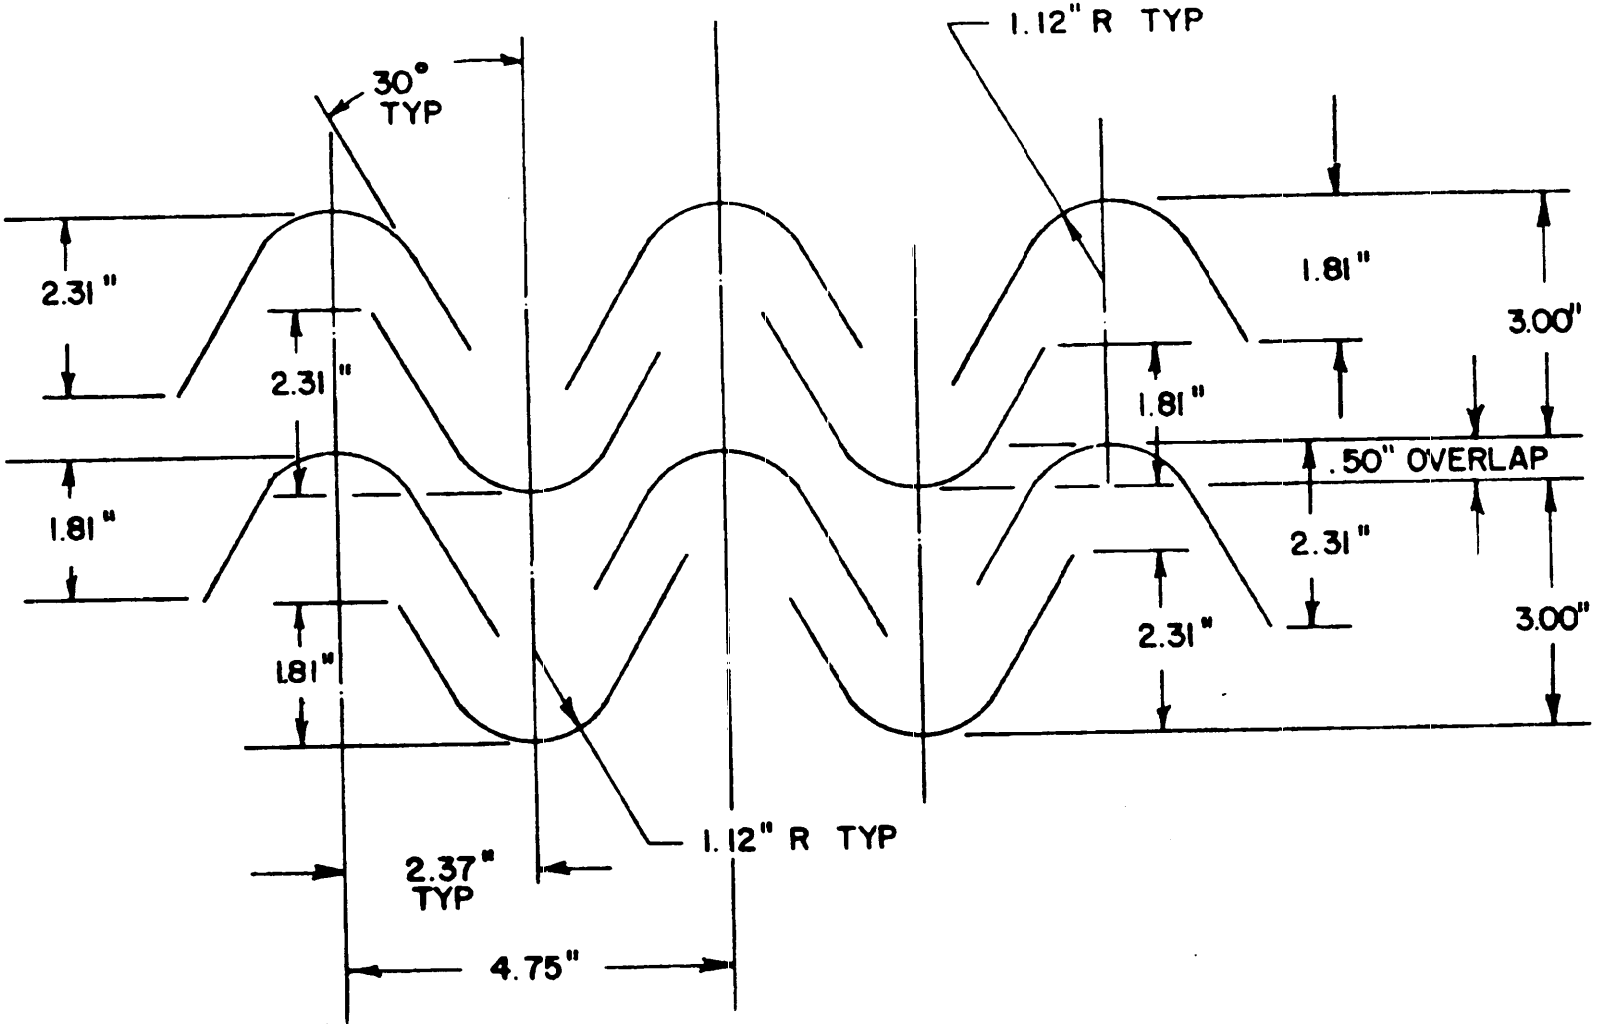


FIGURE 5. INCISING PATTERN

X-2565

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the current version before use.

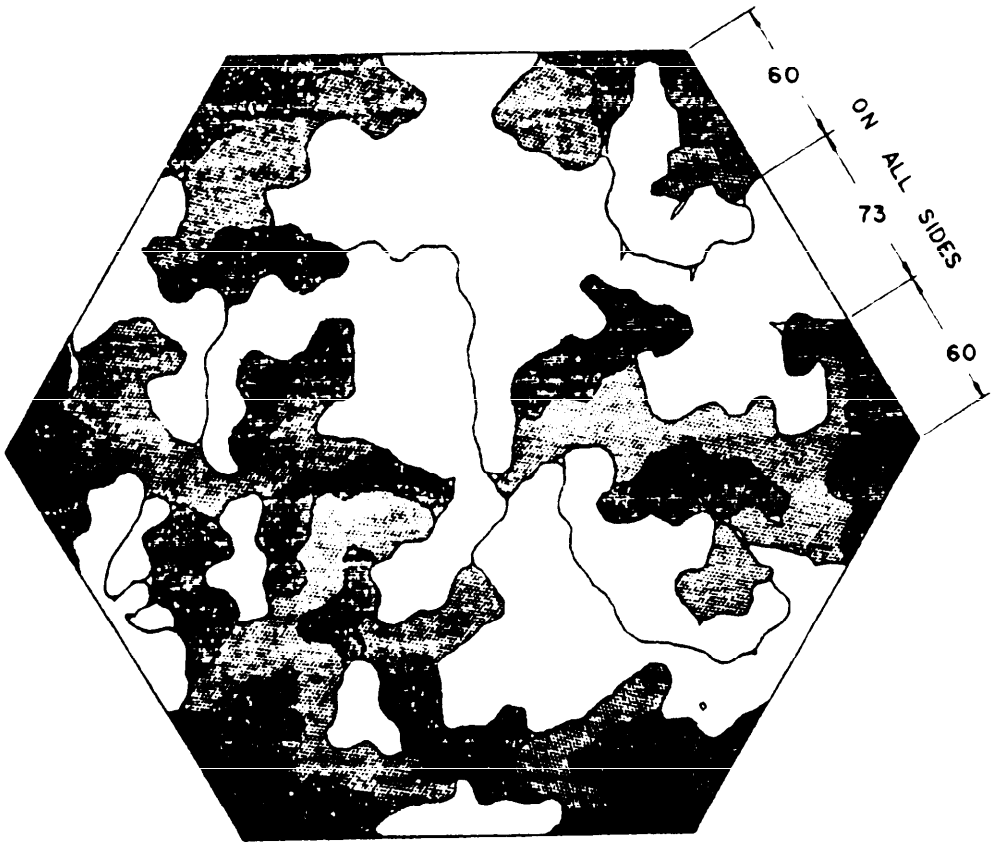


LEGEND	COLOR SIDE 1	COLOR SIDE 2	TEXTURE
	LIGHT GREEN	KHAKI	FIGURE 4 INCISING
	OLIVE	TAN	
	DARK GREEN	DARK GREEN	FIGURE 5 INCISING
	FOREST GREEN	BROWN	

NOTES:
1. APPROXIMATELY 50 PERCENT OF THE GARNISH WILL BE ON EACH SIDE OF THE NET.
2. DIMENSIONS ARE IN INCHES.
3. TOLERANCE: ±12".

FIGURE 6. CAMOUFLAGE HEXAGON SCREEN WOODLAND COLOR/TEXTURE PATTERN AREAS

X 2566B

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

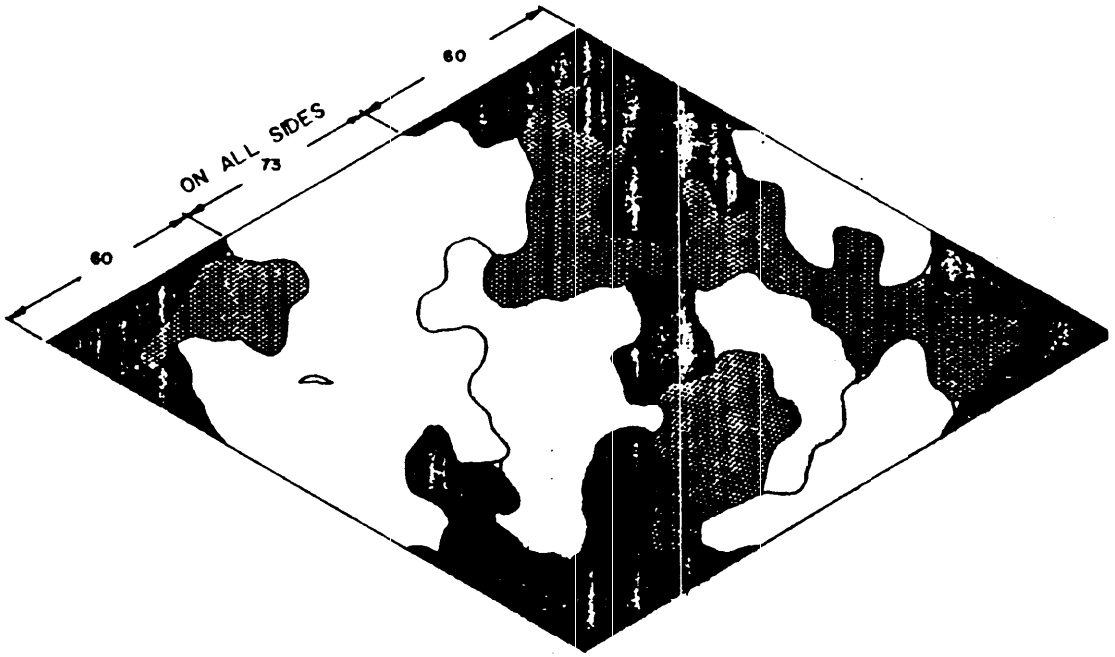


LEGEND	SIDE 1	SIDE 2	TEXTURE
	LIGHT GREEN	KHAKI	FIGURE 4 INCISING
	OLIVE	TAN	
	DARK GREEN	DARK GREEN	FIGURE 5 INCISING
	FOREST GREEN	BROWN	

NOTES:
1. APPROXIMATELY 50 PERCENT OF THE GARNISH WILL BE ON EACH SIDE OF THE NET
2. ALL DIMENSIONS IN INCHES
3. TOLERANCE ± 12

FIGURE 7. CAMOUFLAGE RHOMBIC SCREEN WOODLAND COLOR/TEXTURE PATTERN AREAS

X2567B

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

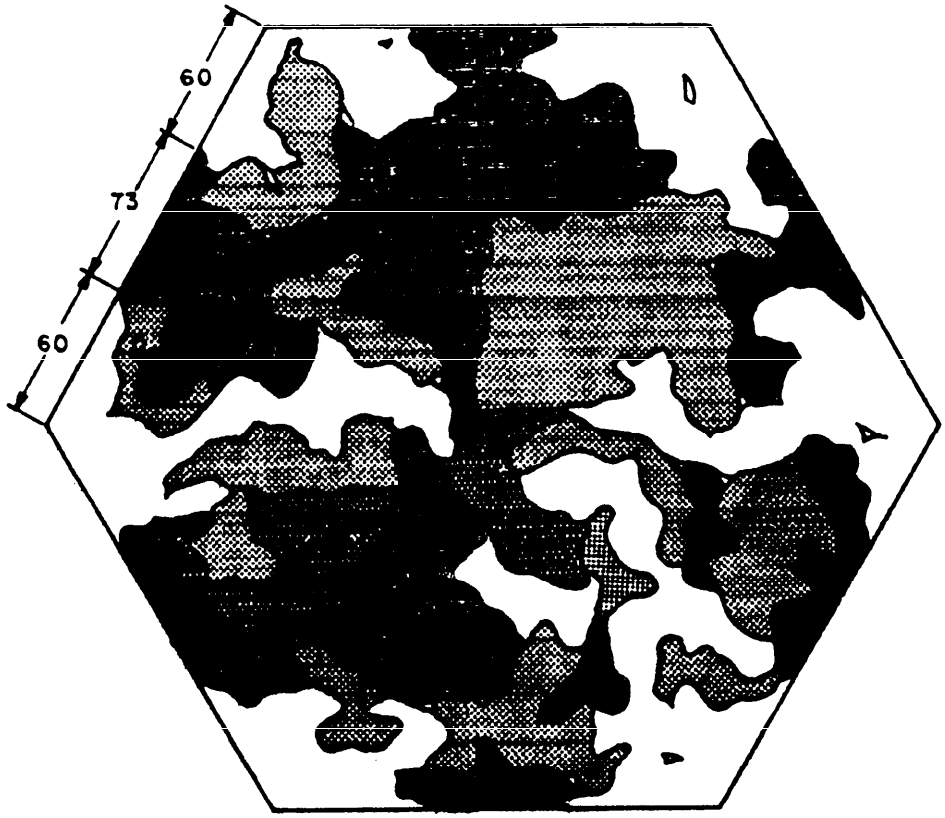

SIDE 1


LEGEND	SIDE 1	TEXTURE
	KHAKI	ALL FIGURE 4 INCISING
	TAN	
	STRAW	
	LT. BROWN	

NOTES:
1. APPROXIMATELY 50 PERCENT OF THE GARNISH WILL BE ON EACH SIDE OF THE NET.
2. ALL DIMENSIONS ARE IN INCHES.
3. TOLERANCES FOR PATTERN EDGE DISTANCE SHALL BE ±12.

FIGURE 8. CAMOUFLAGE HEXAGON SCREEN DESERT COLOR/TEXTURE PATTERN AREAS

X-3109A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

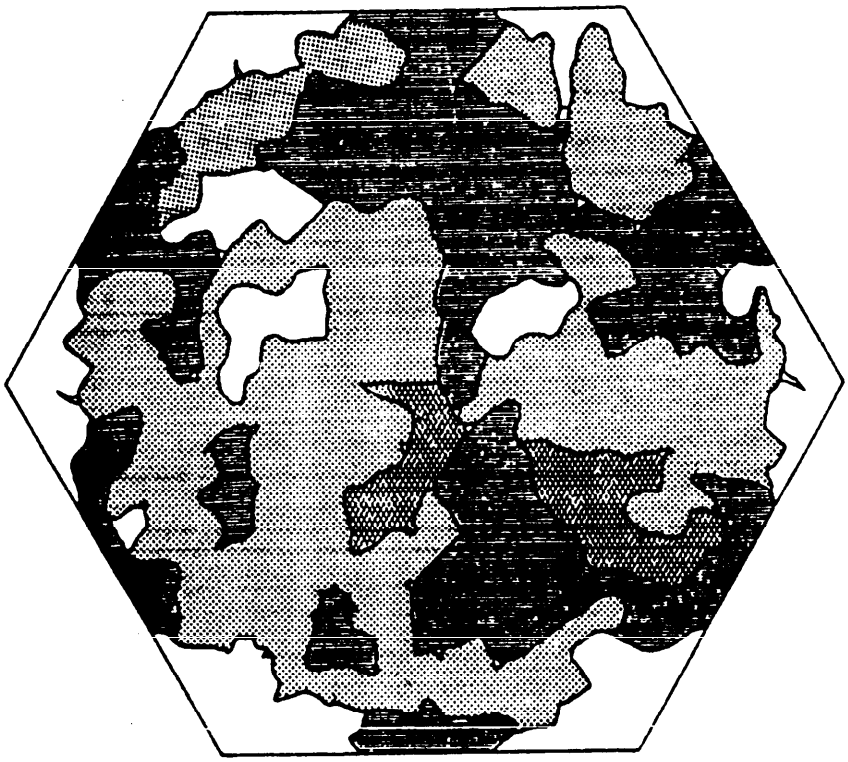

SIDE 2


LEGEND	SIDE 2	TEXTURE
	KHAKI	ALL FIGURE 4 INCISING
	TAN	
	STRAW	
	RUSSET	

NOTES:
1. APPROXIMATELY 50 PERCENT OF THE GARNISH WILL BE ON EACH SIDE OF THE NET.
2. ALL DIMENSIONS ARE IN INCHES.
3. TOLERANCES FOR PATTERN EDGE DISTANCE SHALL BE ±12 .

FIGURE 8a. CAMOUFLAGE HEXAGON SCREEN DESERT COLOR/TEXTURE PATTERN AREAS.

X-3109-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

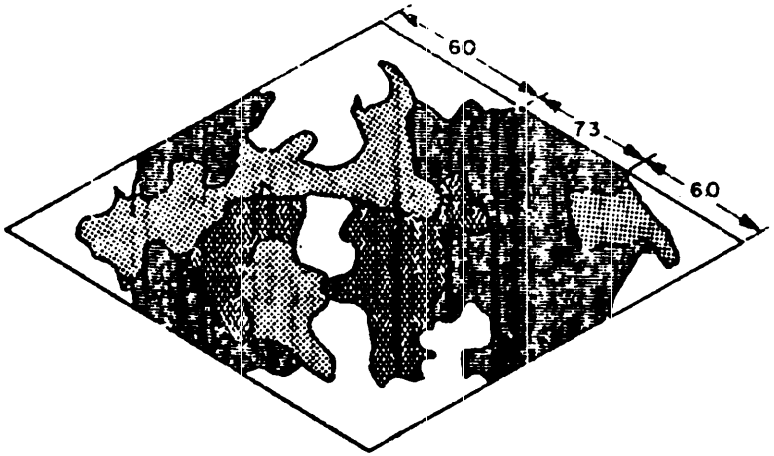

SIDE 1

LEGEND	SIDE 1	TEXTURE
	KHAKI	ALL FIGURE 4 INCISING
	TAN	
	STRAW	
	LT. BROWN	


NOTES:

1. APPROXIMATELY 50 PERCENT OF THE GARNISH WILL BE ON EACH SIDE OF THE NET.
2. ALL DIMENSIONS ARE IN INCHES.
3. TOLERANCES FOR EDGE PATTERN DISTANCES SHALL BE ±2.

FIGURE 9. CAMOUFLAGE RHOMBIC SCREEN DESERT COLOR/TEXTURE PATTERN AREAS.

X-3110A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

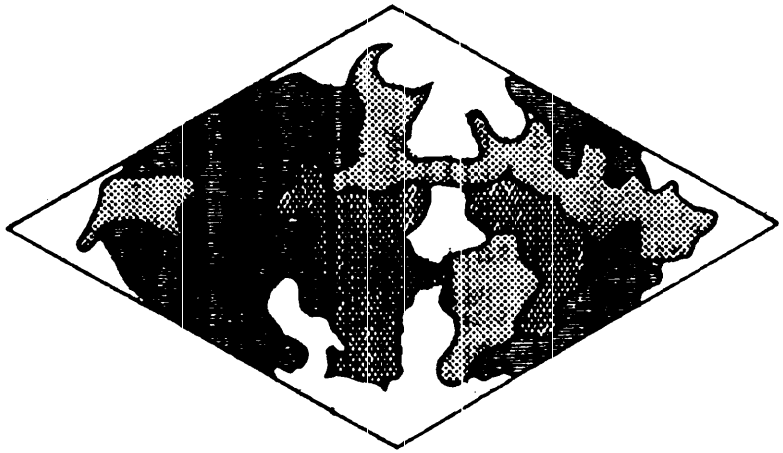

SIDE 2

LEGEND	SIDE 2	TEXTURE
	KHAKI	ALL
	TAN	FIGURE
	STRAW	4
	RUSSET	INCISING


NOTES:

1. APPROXIMATELY 50 PERSENT OF THE GARNISH WILL BE ON EACH SIDE OF THE NET.
2. ALL DIMENSIONS ARE IN INCHES.
3. TOLERANCES FOR EDGE PATTERN DISTANCE SHALL BE ±12.

FIGURE 9a. CAMOUFLAGE RHOMBIC SCREEN DESERT COLOR/TEXTURE PATTERN AREAS

X-3110-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

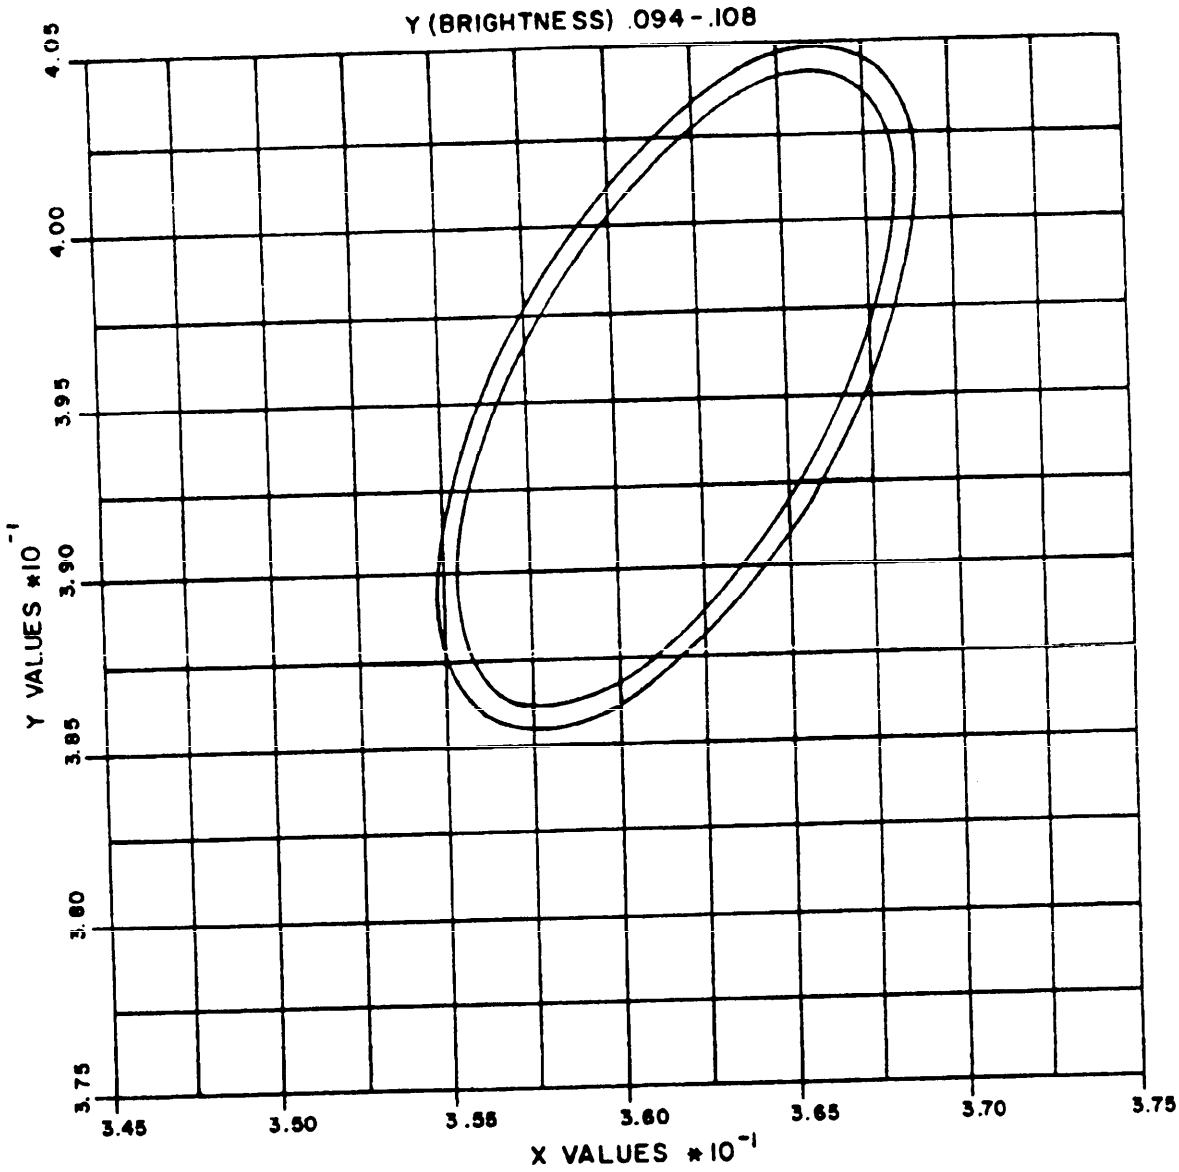


NOTE:
COLOR ELLIPSE IS 2.00 AND 2.25 NBS UNITS FROM CENTRAL VALUES.

FIGURE 10. CHROMATICITY DIAGRAM FOR CAMOUFLAGE CLOTH COLOR - LIGHT GREEN (WOODLAND).

X 2568A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

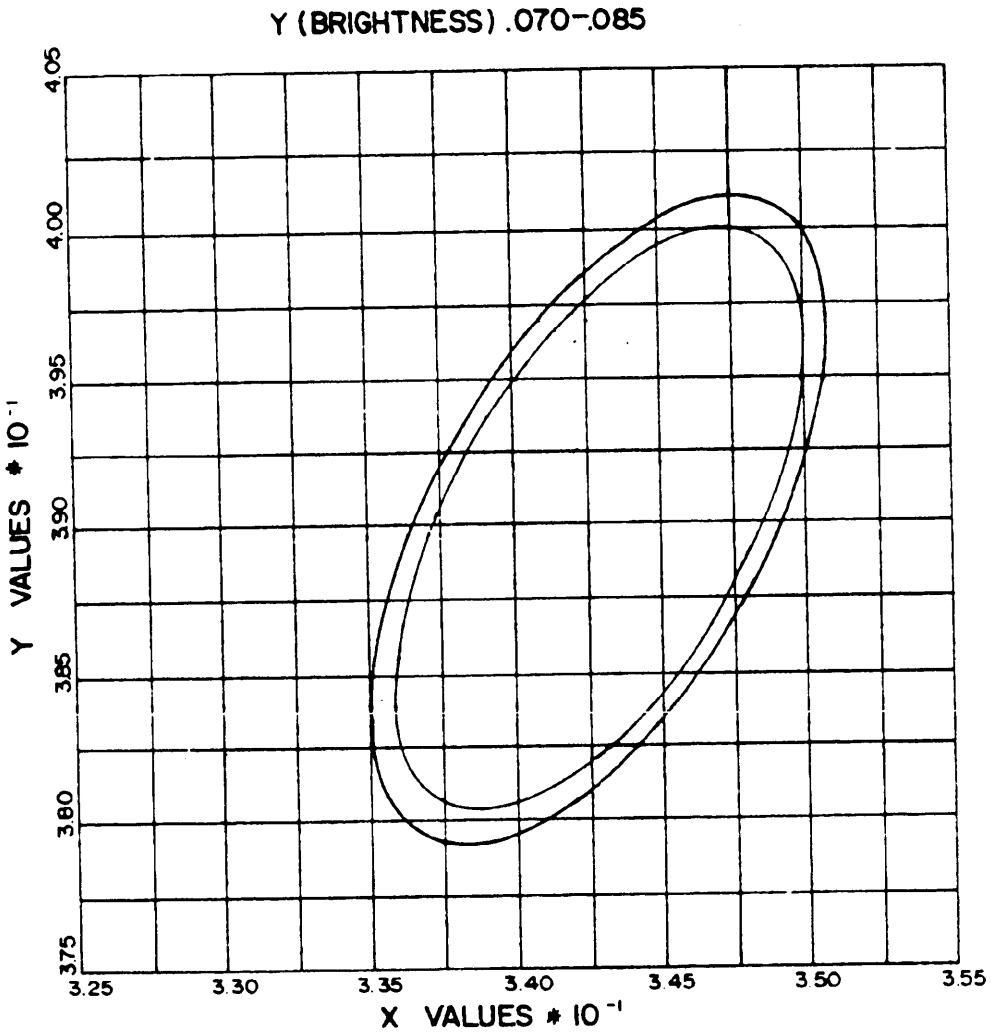


NOTE- COLOR ELLIPSE IS 2.00 AND 2.25 NBS UNITS FROM CENTER VALUES

FIGURE 11. CHROMATICITY DIAGRAM FOR CAMOUFLAGE CLOTH COLOR – DARK GREEN (WOODLAND)

X-2569A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

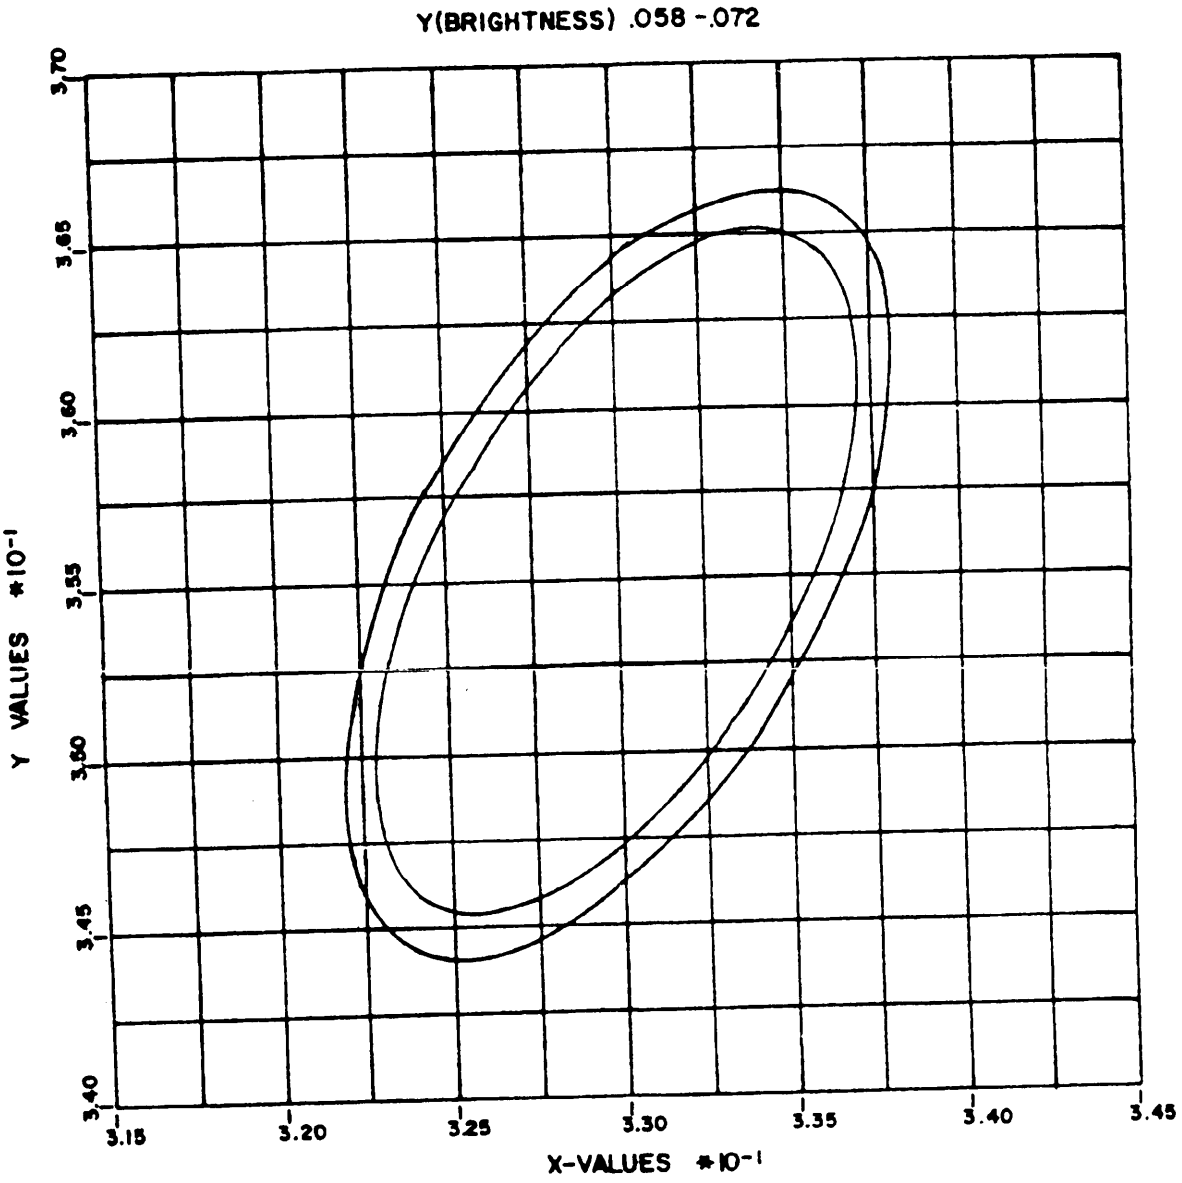


NOTE:
COLOR ELLIPSE IS 2.00 AND 2.25 NBS UNITS FROM CENTER VALUES.

FIGURE 12. CHROMATICITY DIAGRAM FOR CAMOUFLAGE CLOTH COLOR-FOREST GREEN (WOODLAND).

X-2570A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

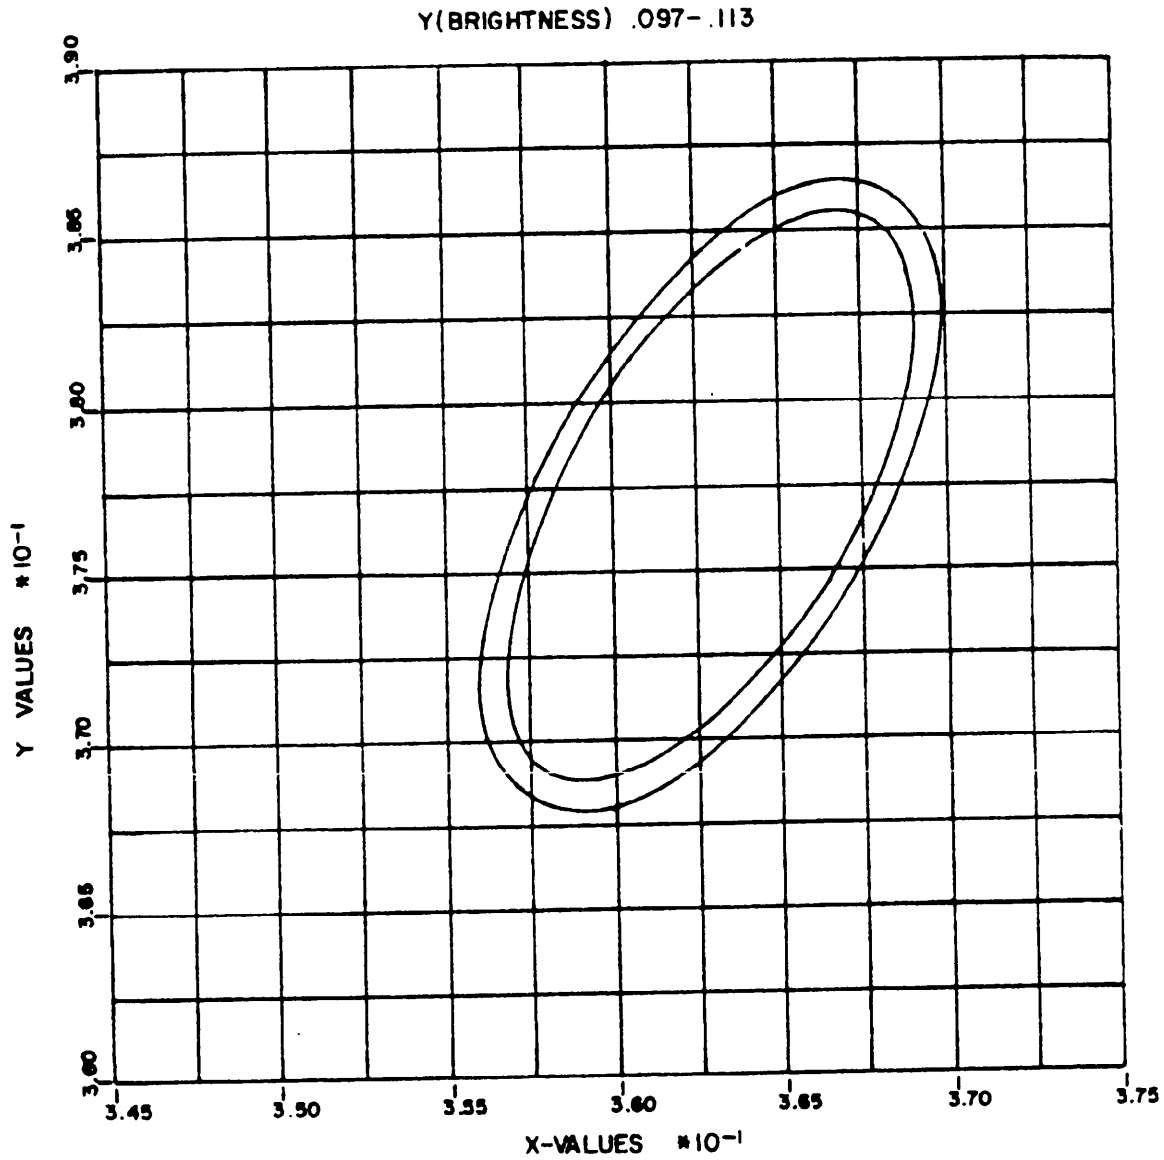


NOTE:
COLOR ELLIPSE IS 2.00 AND 2.25 NBS UNITS FROM CENTER VALUES.

FIGURE 13. CHROMATICITY DIAGRAM FOR CAMOUFLAGE CLOTH COLOR-OLIVE (WOODLAND).

X-2571A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

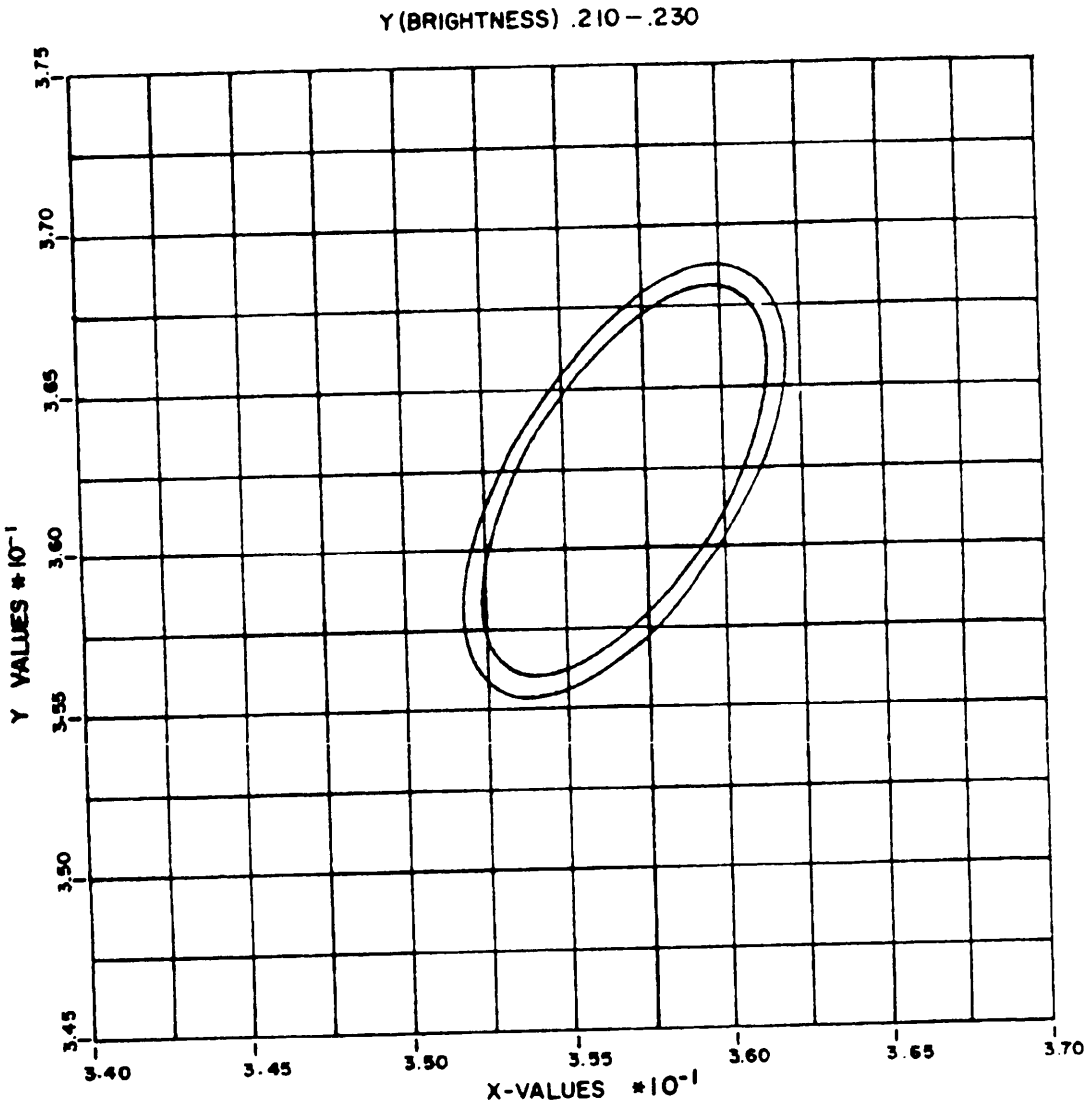


NOTE:
COLOR ELLIPSE IS 2.00 AND 2 25 NBS UNITS FROM CENTER VALUES.

FIGURE 14. CHROMATICITY DIAGRAM FOR CAMOUFLAGE CLOTH COLOR - KHAKI (WOODLAND)

X-2572A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

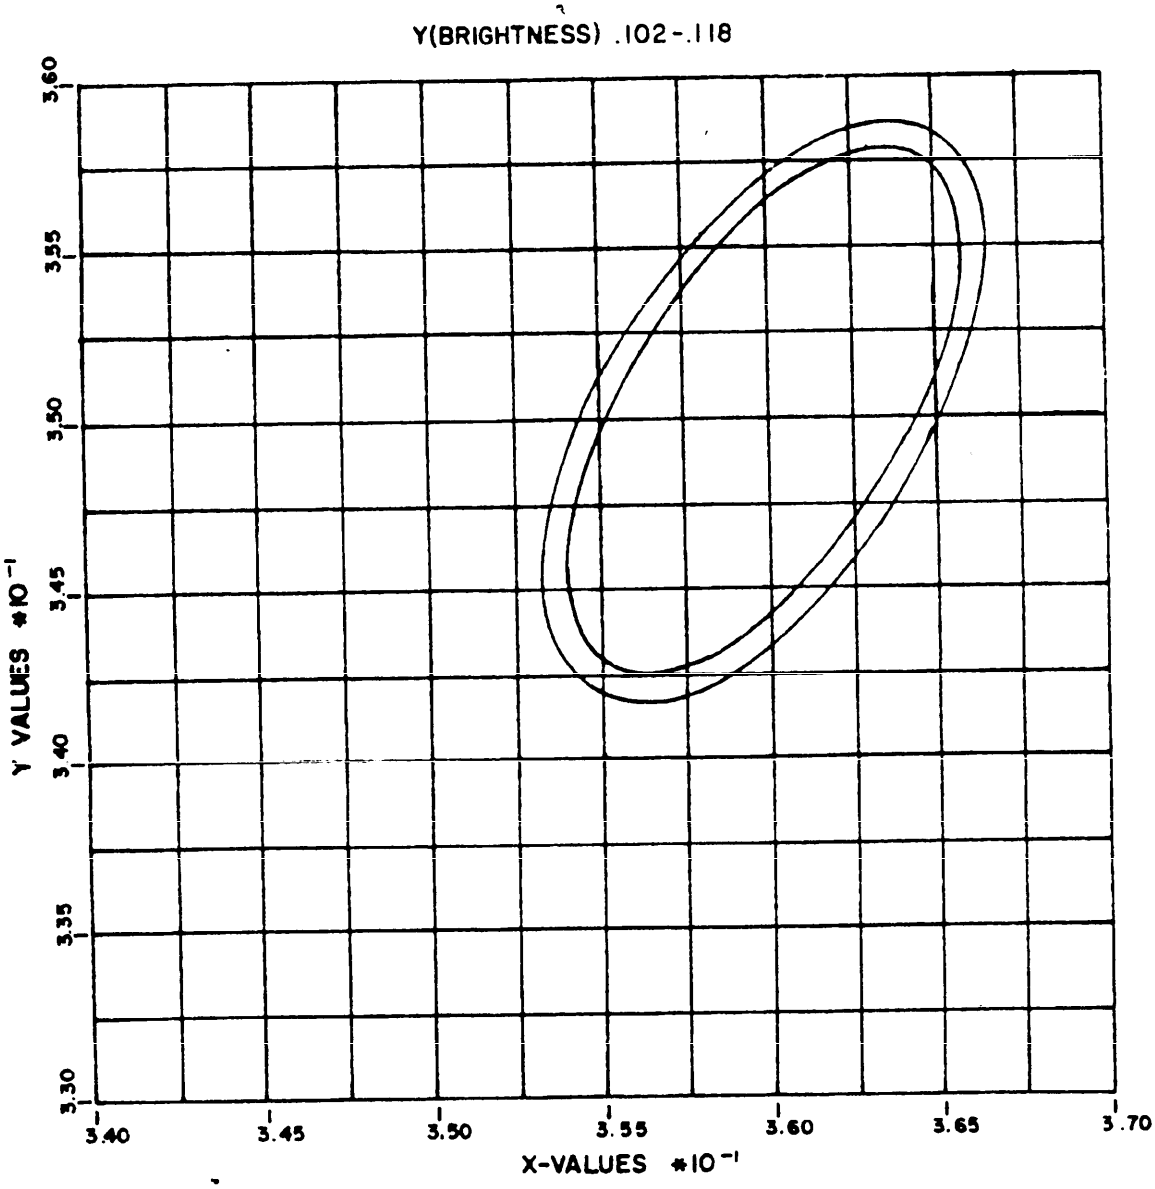


NOTE:
COLOR ELLIPSE IS 2.00 AND 2.25 NBS UNITS FROM CENTER VALUES.

FIGURE 15. CHROMATICITY DIAGRAM FOR CAMOUFLAGE CLOTH COLOR - BROWN (WOODLAND).

X-2573A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

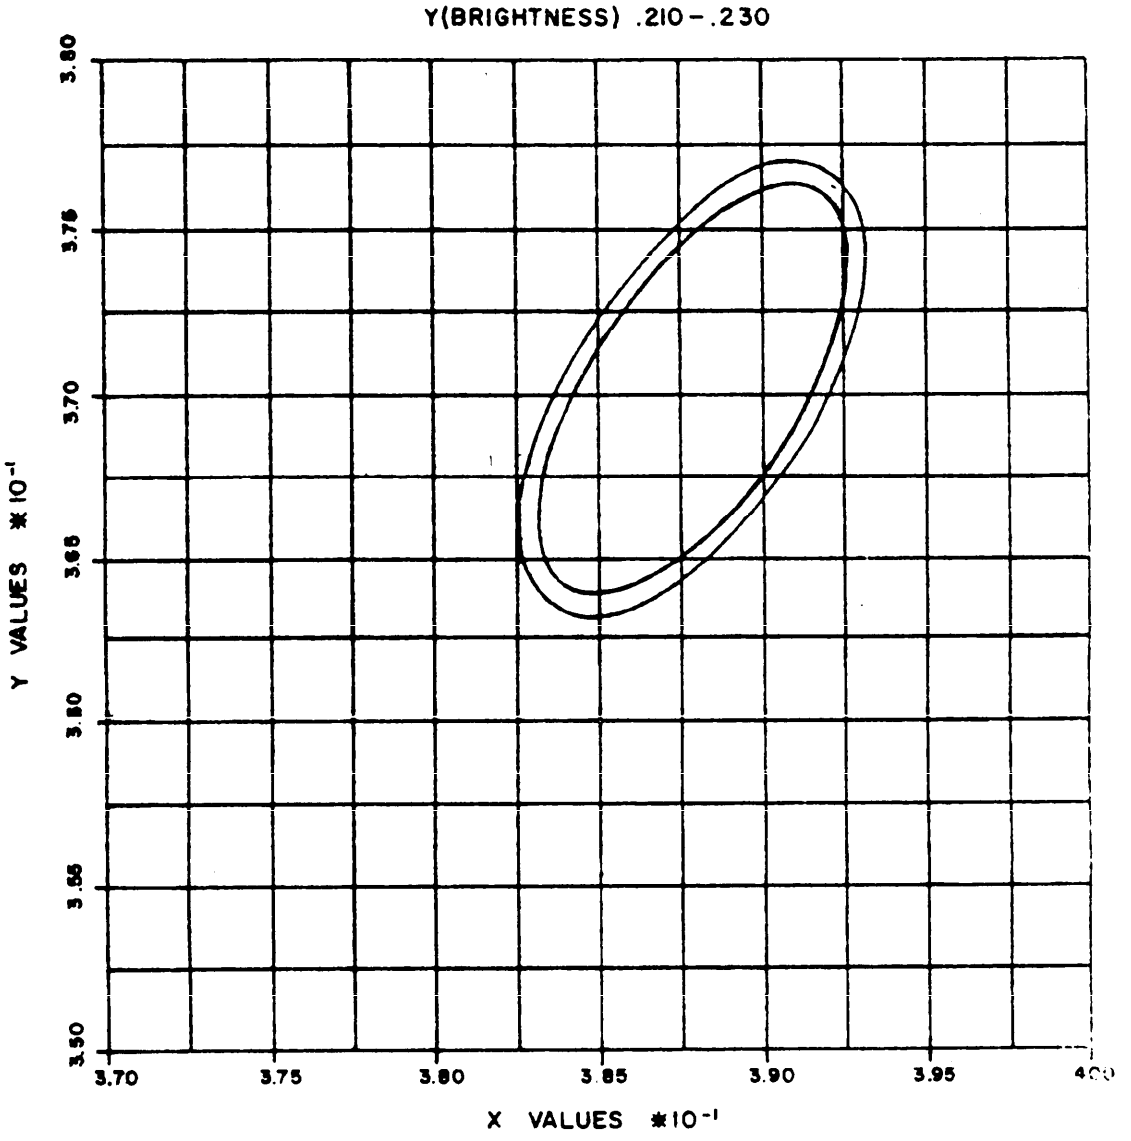


NOTE:
COLOR ELLIPSE IS 2.00 AND 2.25 NBS UNITS FROM CENTER VALUES

FIGURE 16. CHROMATICITY DIAGRAM FOR CAMOUFLAGE CLOTH COLOR-TAN (WOODLAND)

X-2574A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

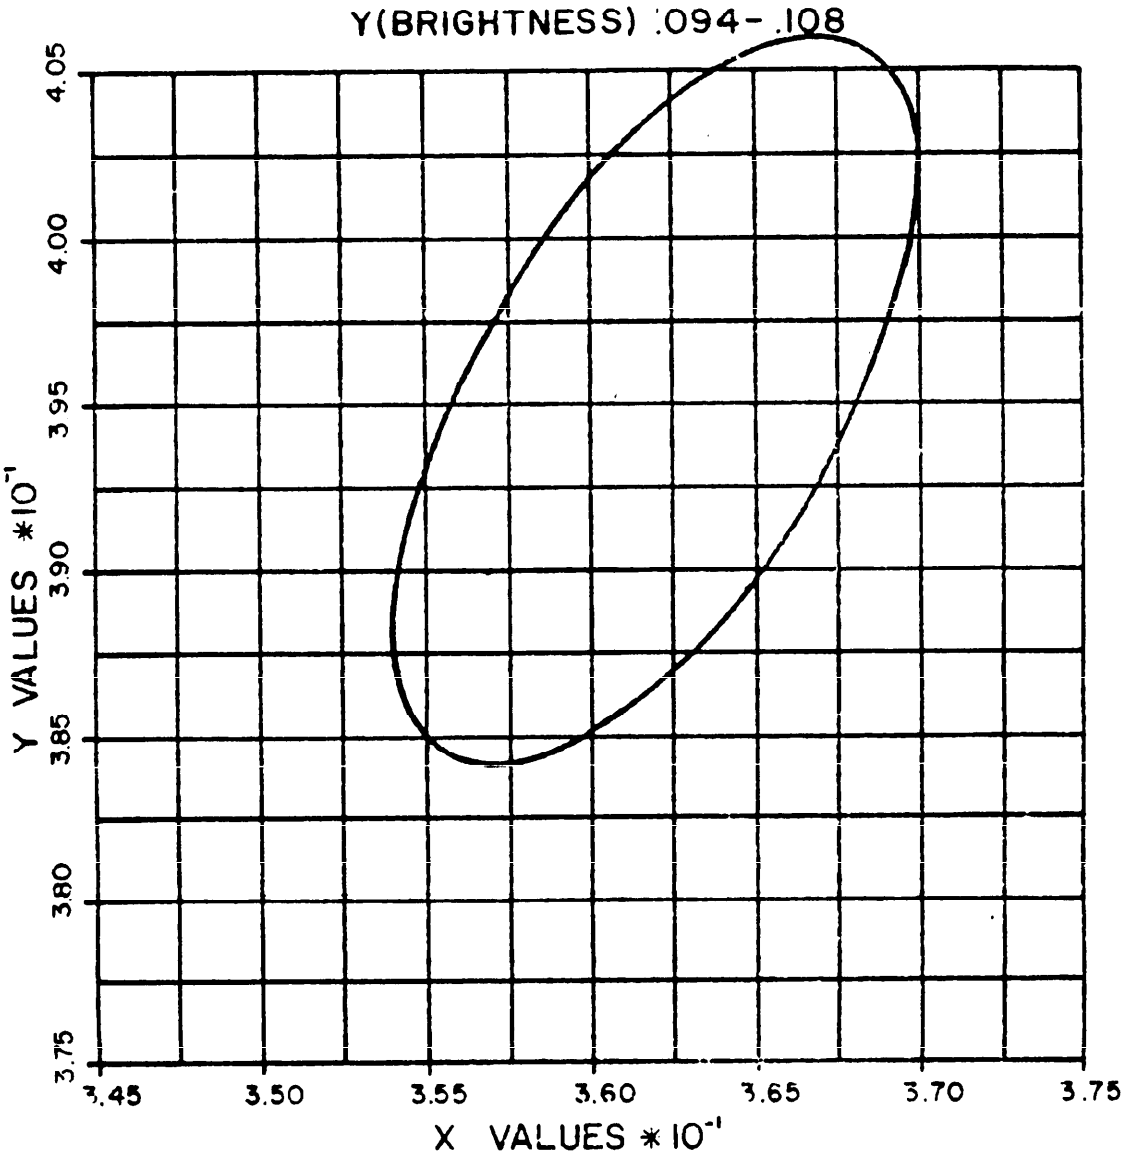


NOTE:
COLOR ELLIPSE IS 2.50 NBS UNITS FROM CENTER VALUES

FIGURE 17. CHROMATICITY DIAGRAM FOR CAMOUFLAGE CLOTH AFTER ENVIRONMENTAL EXPOSURE COLOR - LIGHT GREEN (WOODLAND)

X-2652A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

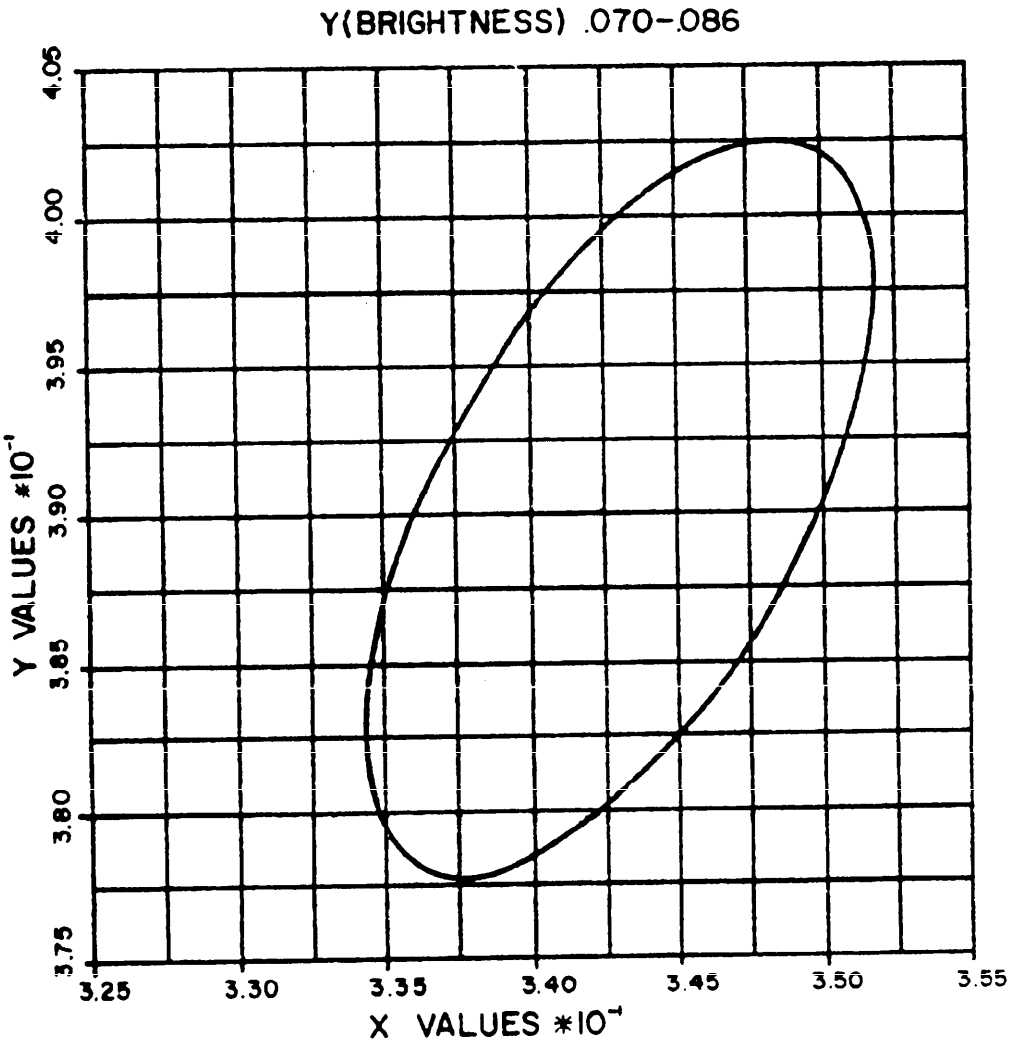


NOTE:
COLOR ELLIPSE IS 2.50 NBS UNITS FROM CENTER VALUES

FIGURE 18. CHROMATICITY DIAGRAM FOR CAMOUFLAGE CLOTH AFTER ENVIRONMENTAL EXPOSURE. COLOR-DARK GREEN (WOODLAND)

X-2653A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

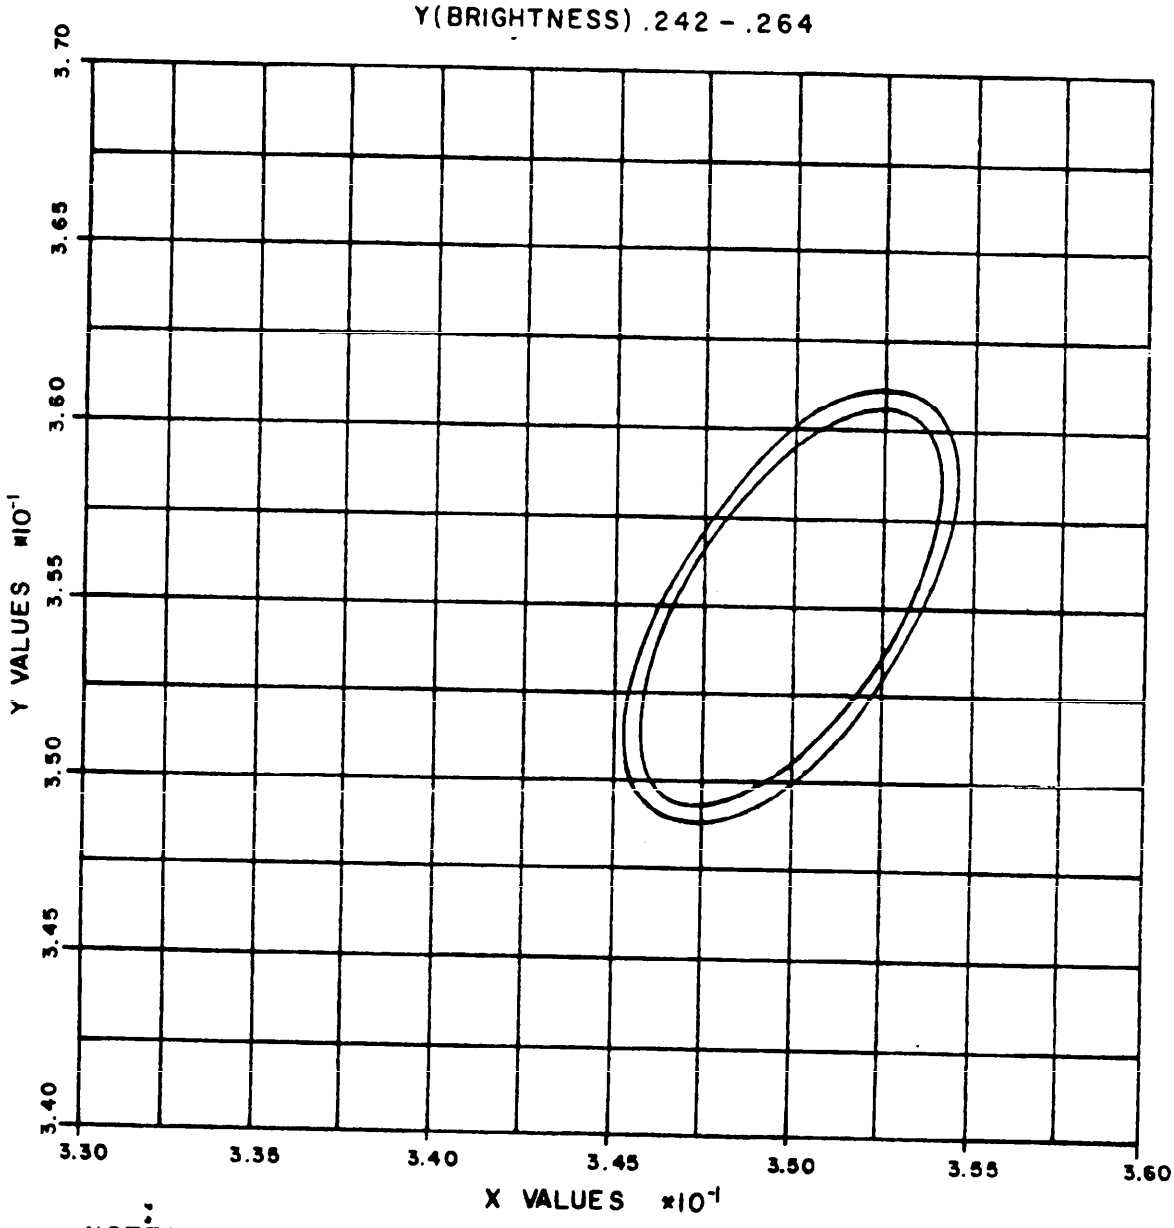


NOTE:
COLOR ELLIPSE IS 2.00 AND 2.25 NBS UNITS FROM CENTER VALUES.

FIGURE 19. CHROMATICITY DIAGRAM FOR CAMOUFLAGE CLOTH, COLOR-KHAKI (DESERT)

X-3111

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

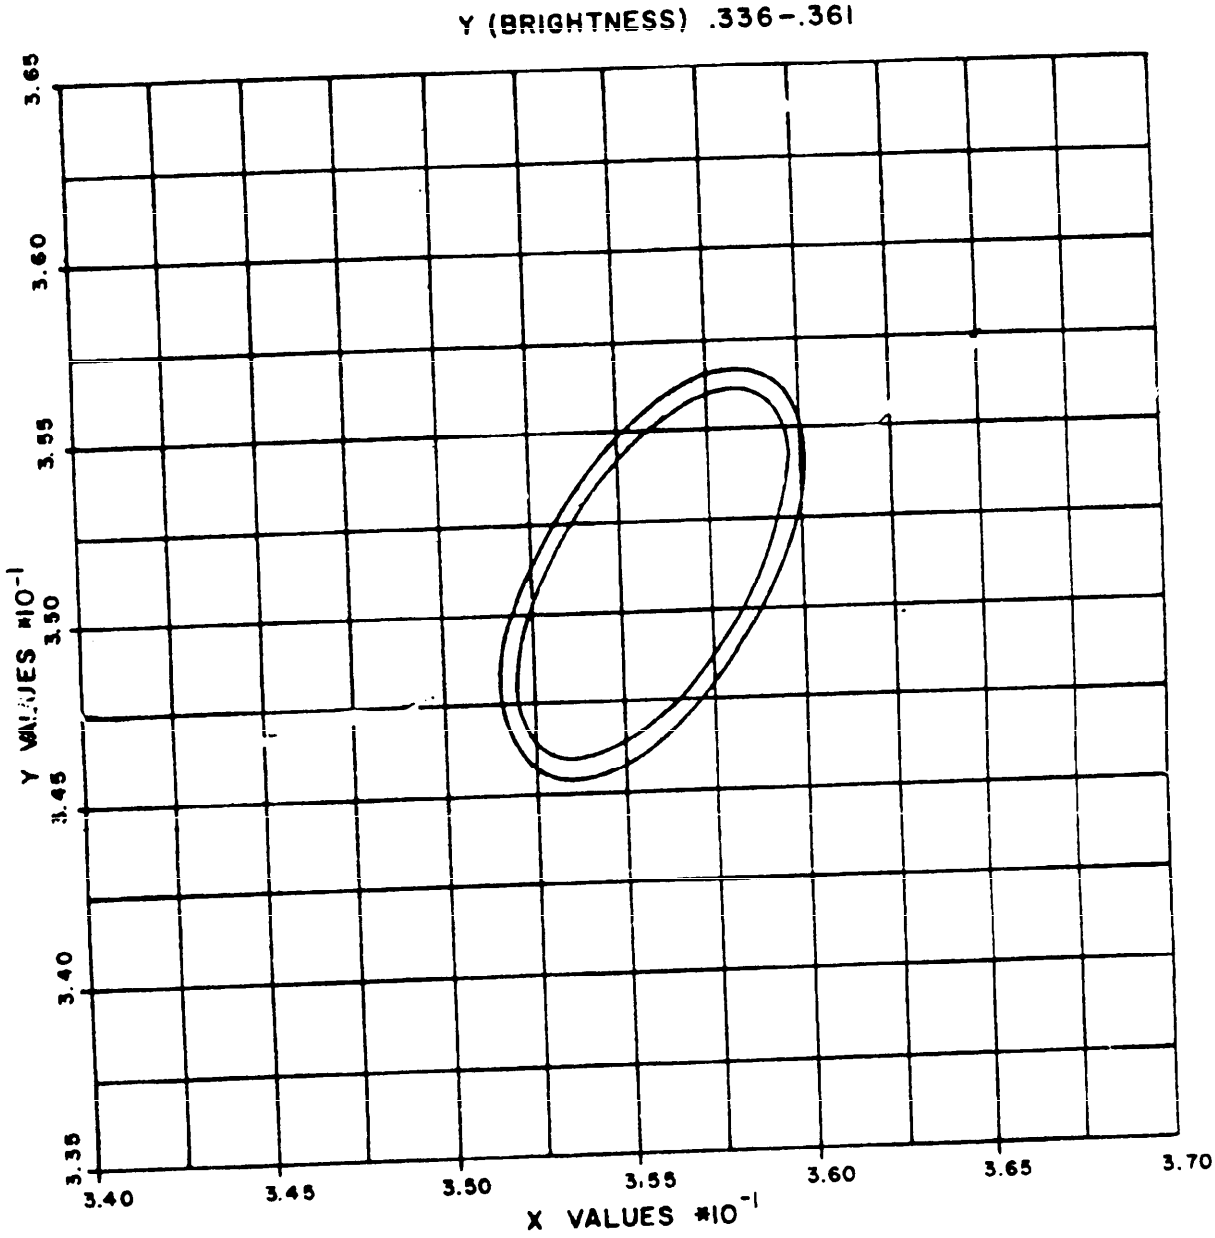


NOTE:
COLOR ELLIPSE IS 2.00 AND 2.25 NBS UNITS FROM CENTER VALUES.

FIGURE 20. CHROMATICITY DIAGRAM FOR CAMOUFLAGE CLOTH, COLOR - TAN (DESERT).

X-3112

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

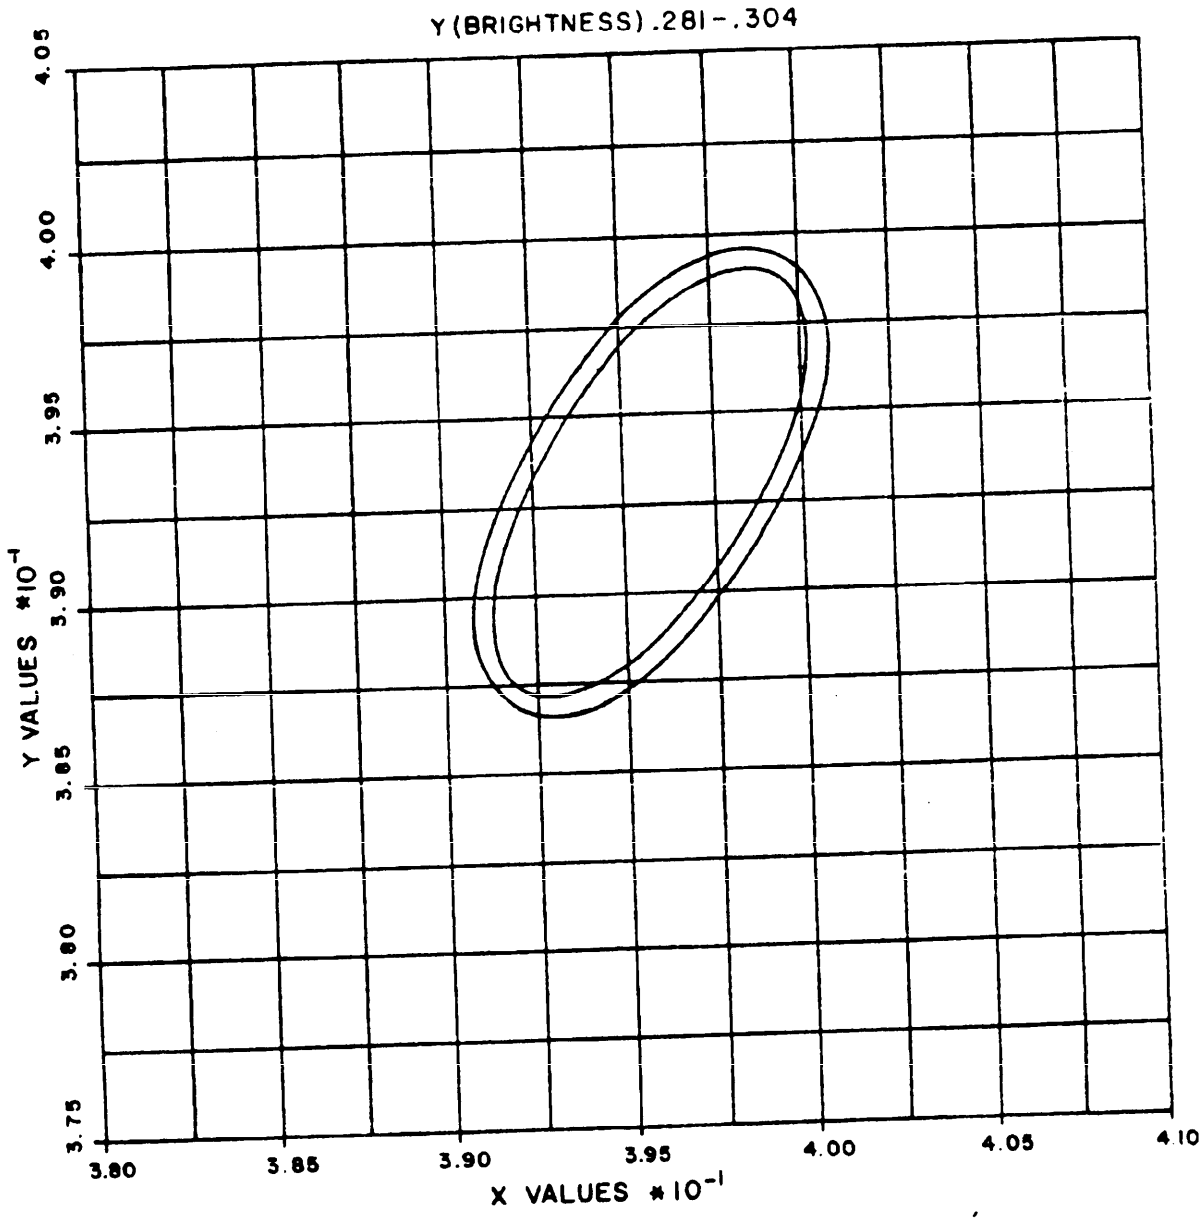


NOTE:
COLOR ELLIPSE IS 2.00 AND 2.25 NBS UNITS FROM CENTER VALUES.

FIGURE 21. CHROMATICITY DIAGRAM FOR CAMOUFLAGE CLOTH, COLOR - STRAW (DESERT).

X-3113

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

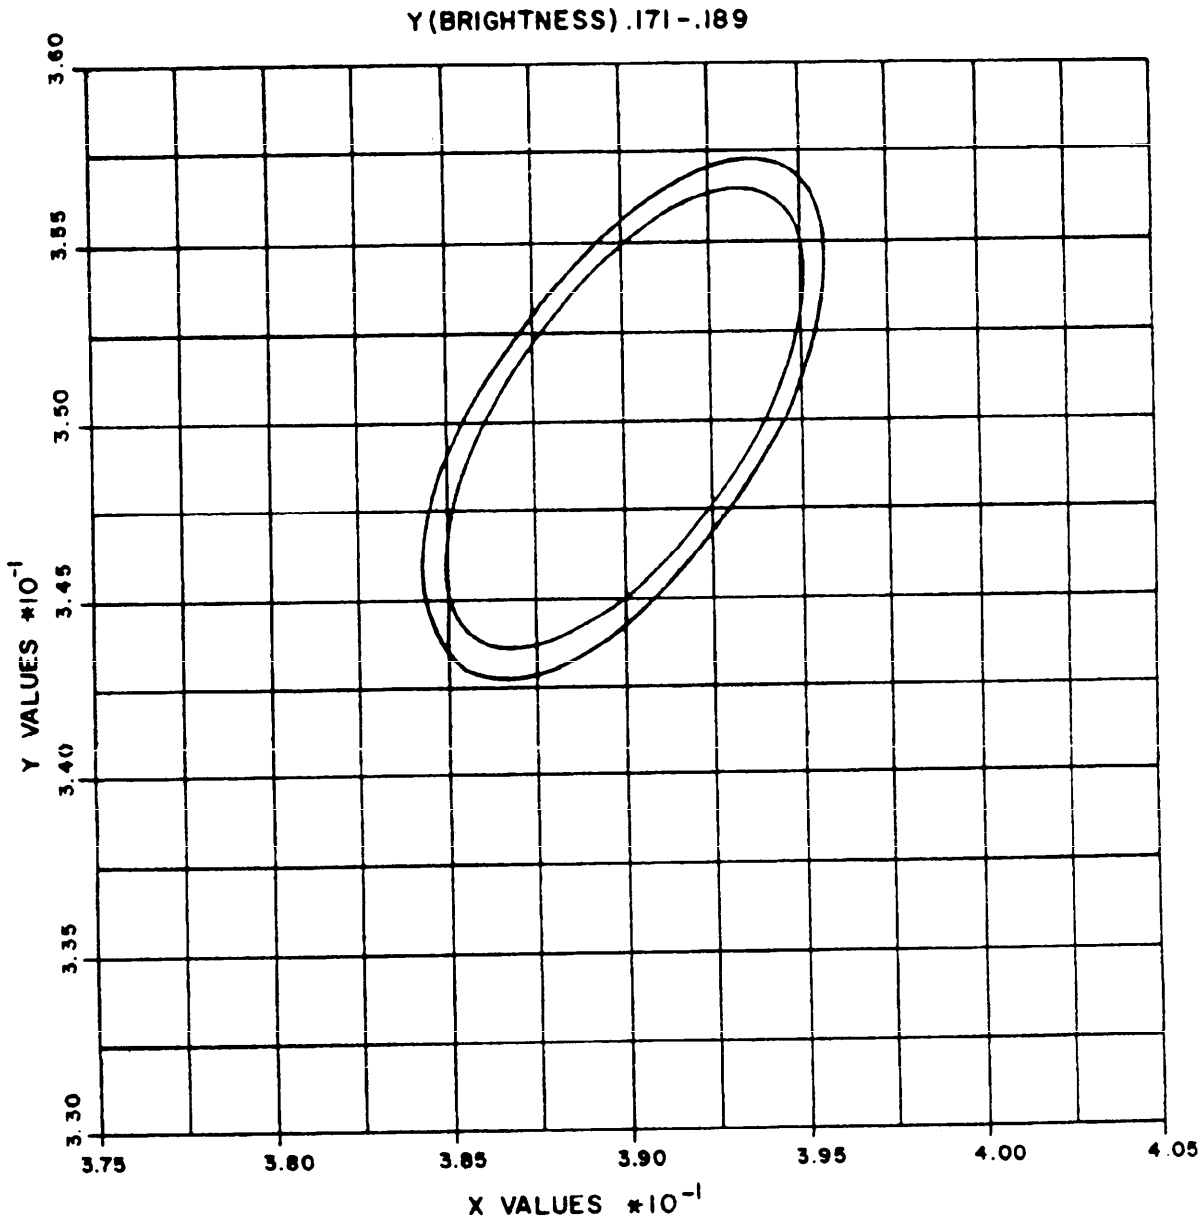


NOTE:
COLOR ELLIPSE IS 2.00 AND 2.25 NBS UNITS FROM CENTER VALUES.

FIGURE 22. CHROMATICITY DIAGRAM FOR CAMOUFLAGE CLOTH, COLOR - RUSSET (DESERT)

X-3114

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

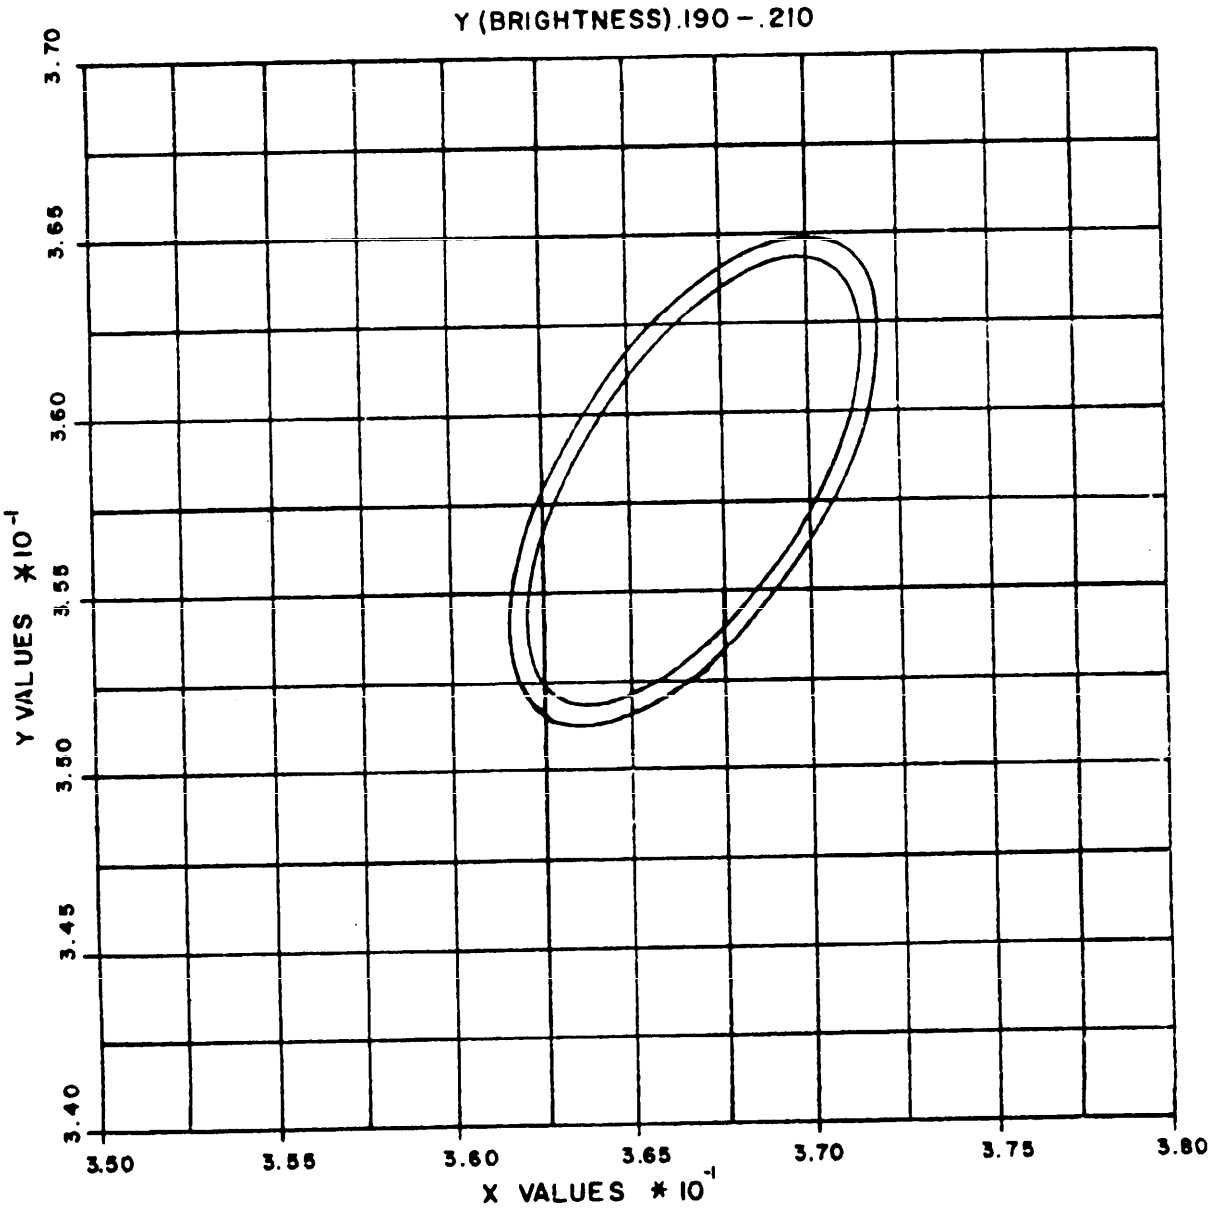


NOTE:
COLOR ELLIPSE IS 2.00 AND 2.25 NBS UNITS FROM CENTER VALUES.

FIGURE 23. CHROMATICITY DIAGRAM FOR CAMOUFLAGE CLOTH, COLOR-LIGHT BROWN (DESERT).

X-3115

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

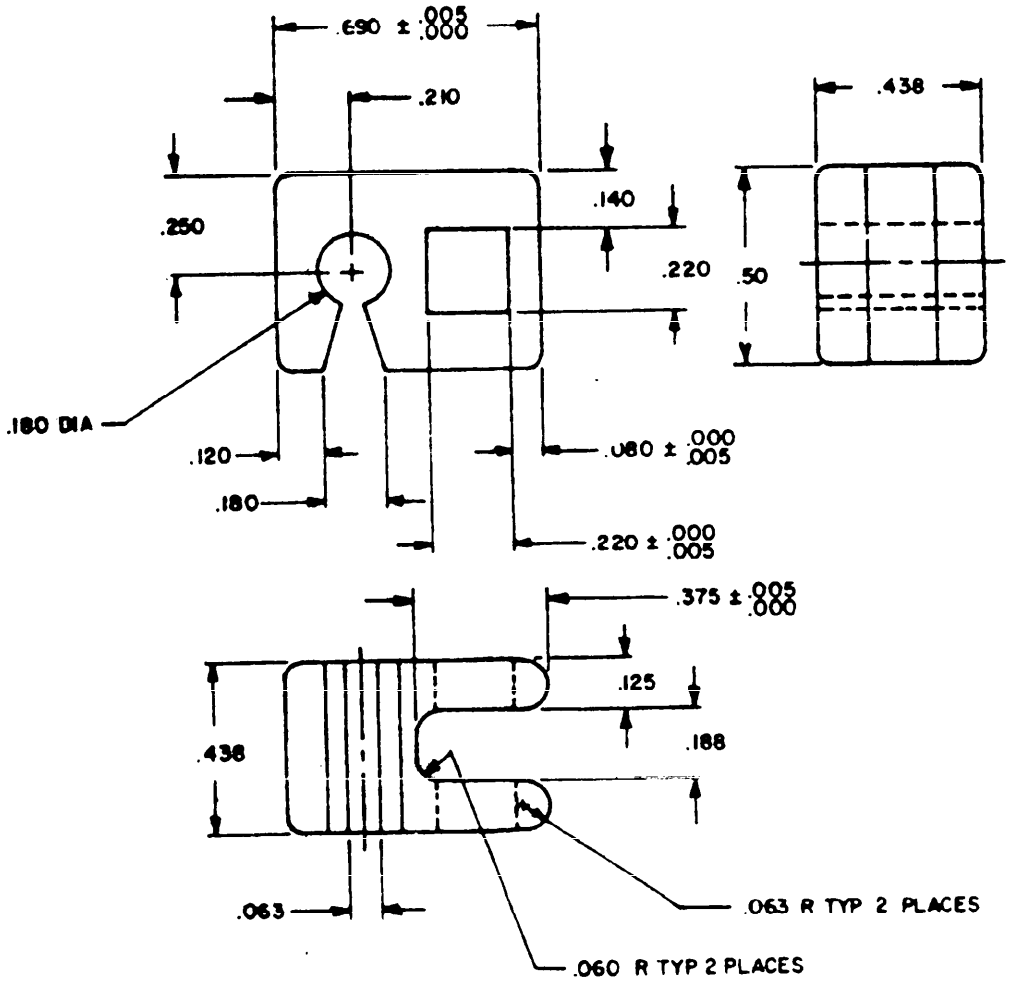


NOTE:
1. UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
2. TOLERANCES:
   3 PLACE DECIMALS ± .005
   2 PLACE DECIMALS ± .01
   BREAK SHARP EDGES

FIGURE 24. BRACKETS

X-2575

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

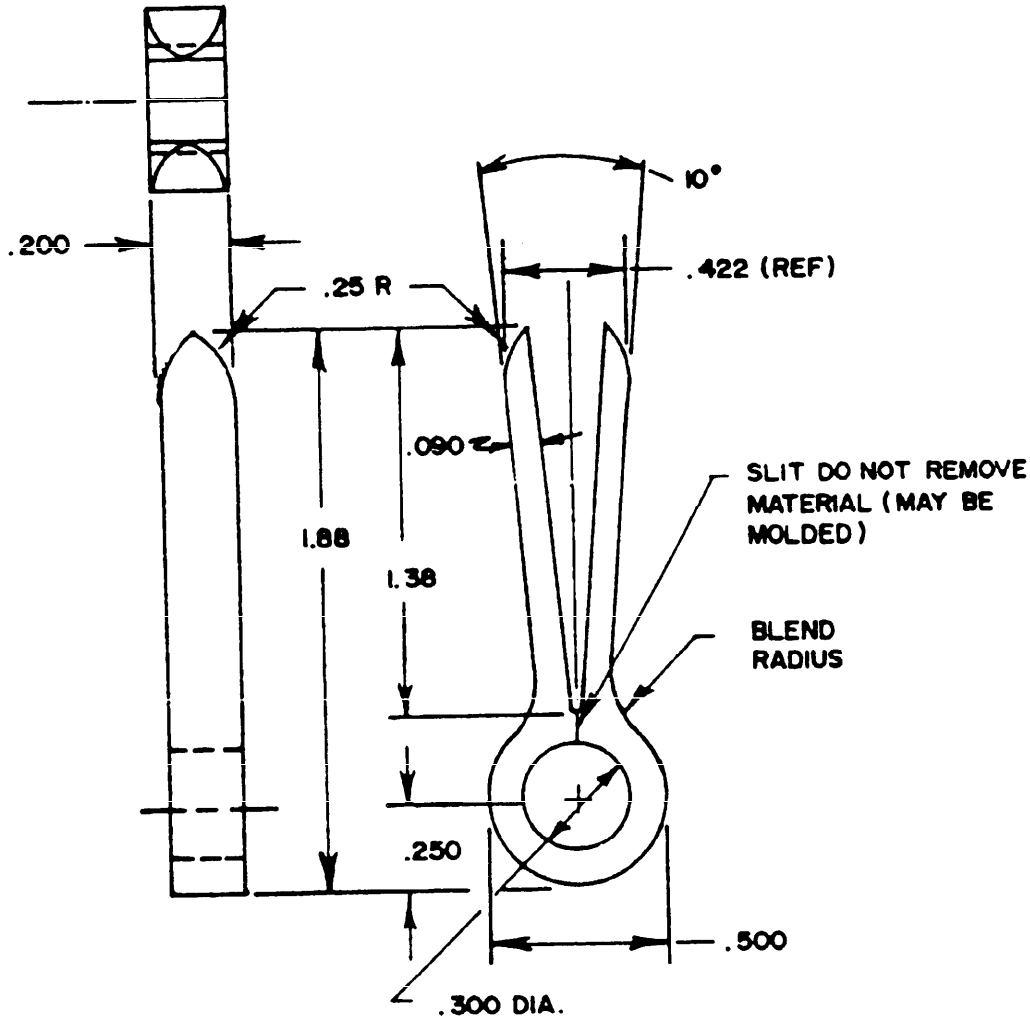


UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ANGLES ± 2°
3 PLACE DECIMALS ± .010
2 PLACE DECIMALS ± .020


NOTE: OUTSIDE EDGES (4) OF PIN PRONGS TO BE RADIUSED 1/32-INCH (TOLERANCES, +0, -1/16 INCH)

FIGURE 25. PINS

X-2576

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

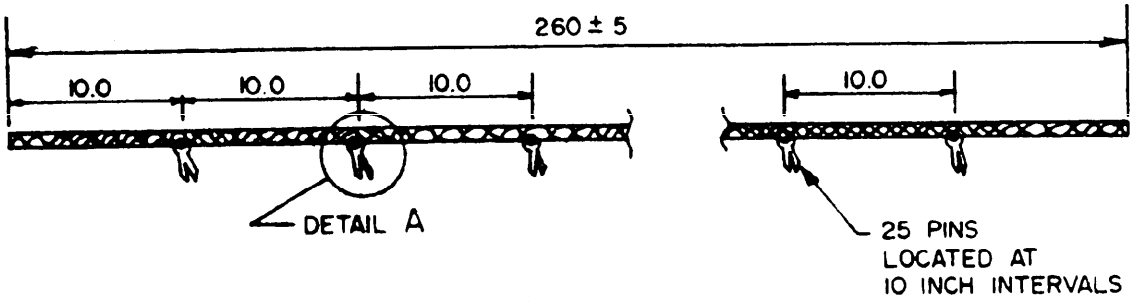

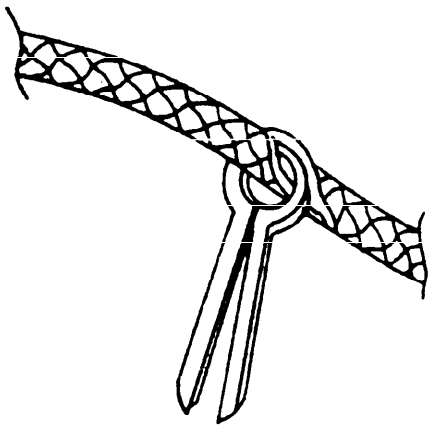


DETAIL A

NOTES:
1. ALL DIMENSIONS ARE IN INCHES
2. UNSPECIFIED TOLERANCE: ±.5

FIGURE 26. LANYARD WITH PIN LOCATION

X-2577A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

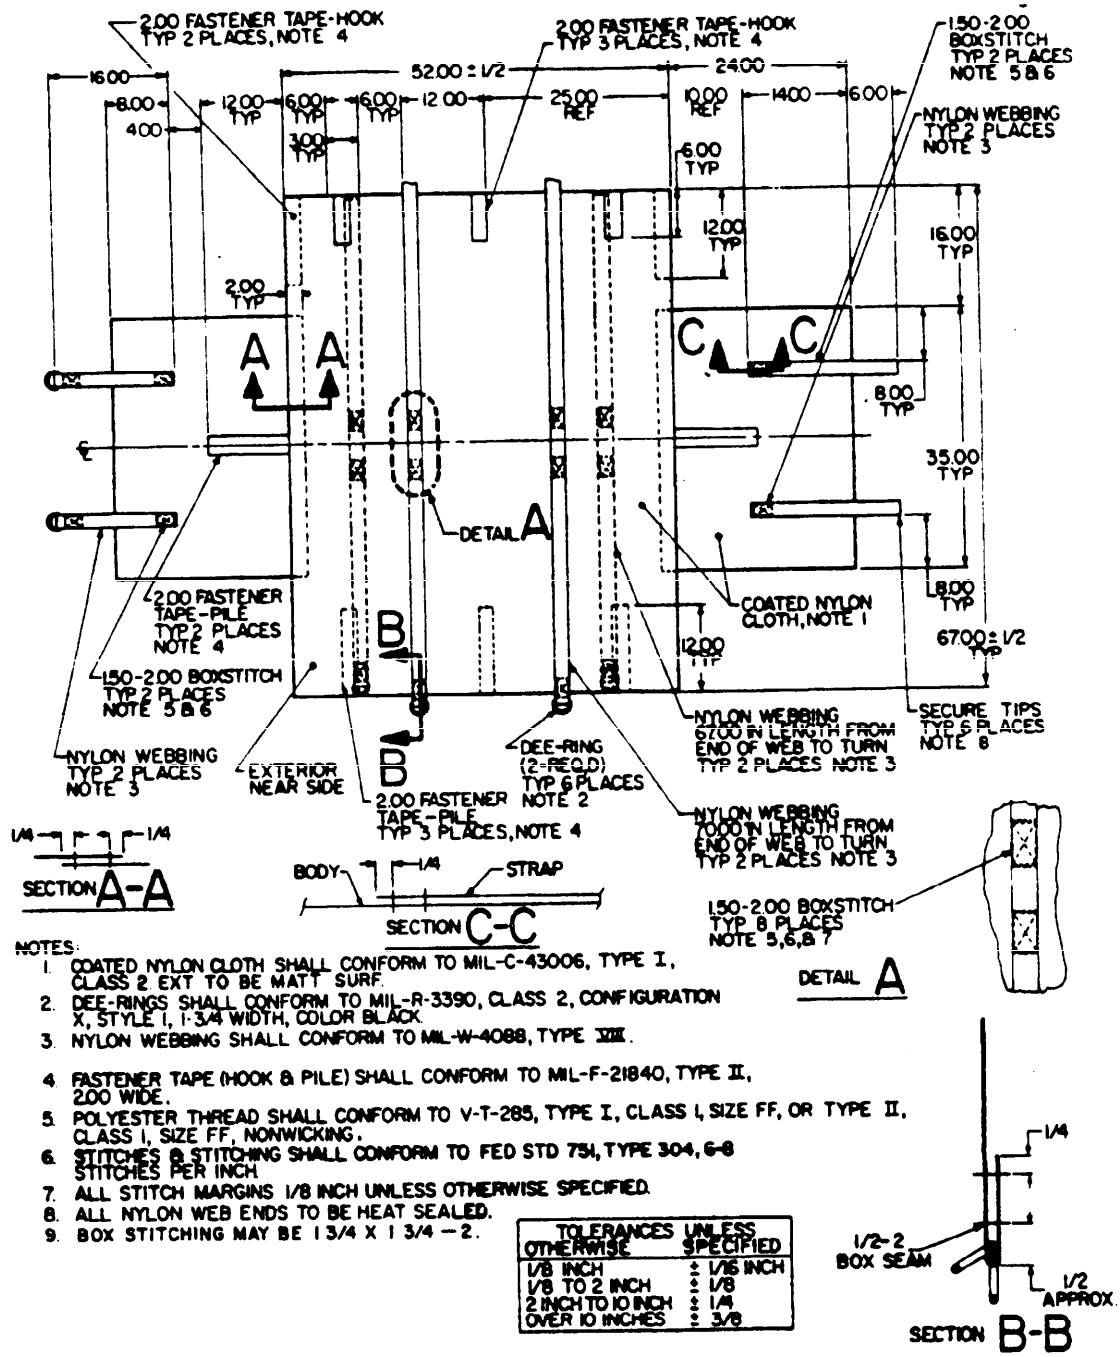

NOTES:


1. COATED NYLON CLOTH SHALL CONFORM TO MIL-C-43006, TYPE I, CLASS 2 EXT TO BE MATT SURF.
2. DEE-RINGS SHALL CONFORM TO MIL-R-3390, CLASS 2, CONFIGURATION X, STYLE 1, 1-3/4 WIDTH, COLOR BLACK.
3. NYLON WEBBING SHALL CONFORM TO MIL-W-4088, TYPE XIII.
4. FASTENER TAPE (HOOK & PILE) SHALL CONFORM TO MIL-F-21840, TYPE II, 2.00 WIDE.
5. POLYESTER THREAD SHALL CONFORM TO V-T-285, TYPE I, CLASS 1, SIZE FF, OR TYPE II, CLASS 1, SIZE FF, NONWICKING.
6. STITCHES & STITCHING SHALL CONFORM TO FED STD 751, TYPE 304, 6-8 STITCHES PER INCH.
7. ALL STITCH MARGINS 1/8 INCH UNLESS OTHERWISE SPECIFIED.
8. ALL NYLON WEB ENDS TO BE HEAT SEALED.
9. BOX STITCHING MAY BE 1 3/4 X 1 3/4 — 2.

TOLERANCES UNLESS OTHERWISE SPECIFIED	
1/8 INCH	± 1/16 INCH
1/8 TO 2 INCH	± 1/8
2 INCH TO 10 INCH	± 1/4
OVER 10 INCHES	± 3/8

FIGURE 27. SCREEN CASE

X-2578C

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

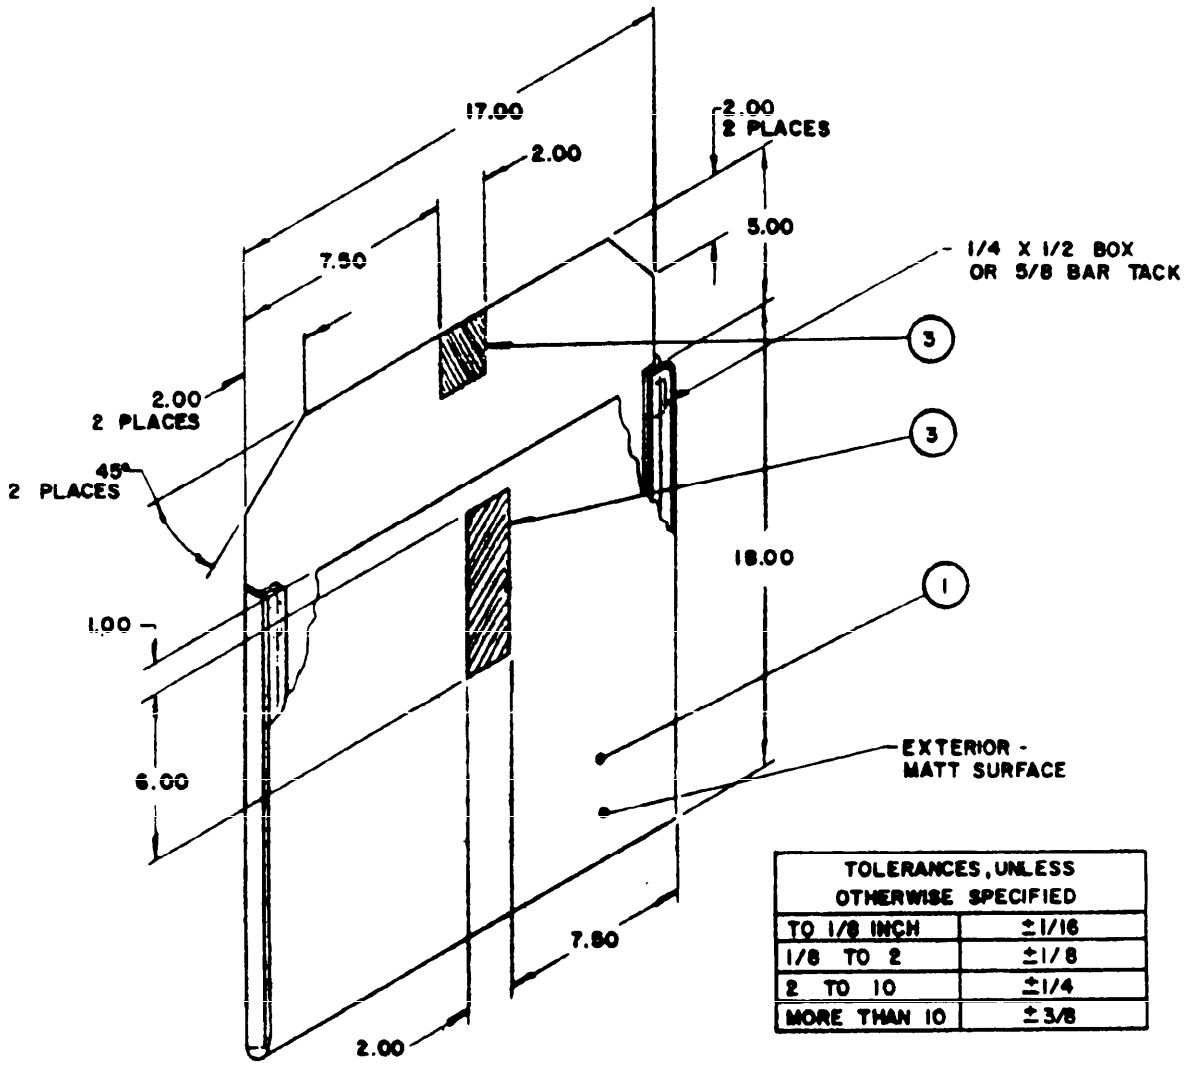

TOLERANCES, UNLESS OTHERWISE SPECIFIED	
TO 1/8 INCH	±1/16
1/8 TO 2	±1/8
2 TO 10	±1/4
MORE THAN 10	±3/8

NOTES:

1. COATED NYLON CLOTH CONFORMING TO MIL-C-43006, TYPE I, CLASS 2. FABRICATE USING POLYESTER THREAD. CONFORMING TO V-T-285, TYPE I, CLASS 1, SIZE FF, OR TYPE II, CLASS 1, SIZE FF, NONWICKING.
2. STITCH MARGINS FOR FASTENERS ARE 1/8 ±1/16 AND FOR CLOSING SEAM TO BE 3/8 ±1/16.
3. FASTENER TAPE (HOOK AND PILE) SHALL CONFORM TO MIL-F-21840, TYPE II, 2 INCH WIDTH.
4. STITCHES AND SEAMS SHALL CONFORM TO FED-STD-751 OF FOLLOWING TYPES: STITCHES-TYPES 301.

FIGURE 28. REPAIR KIT CASE X-25798

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

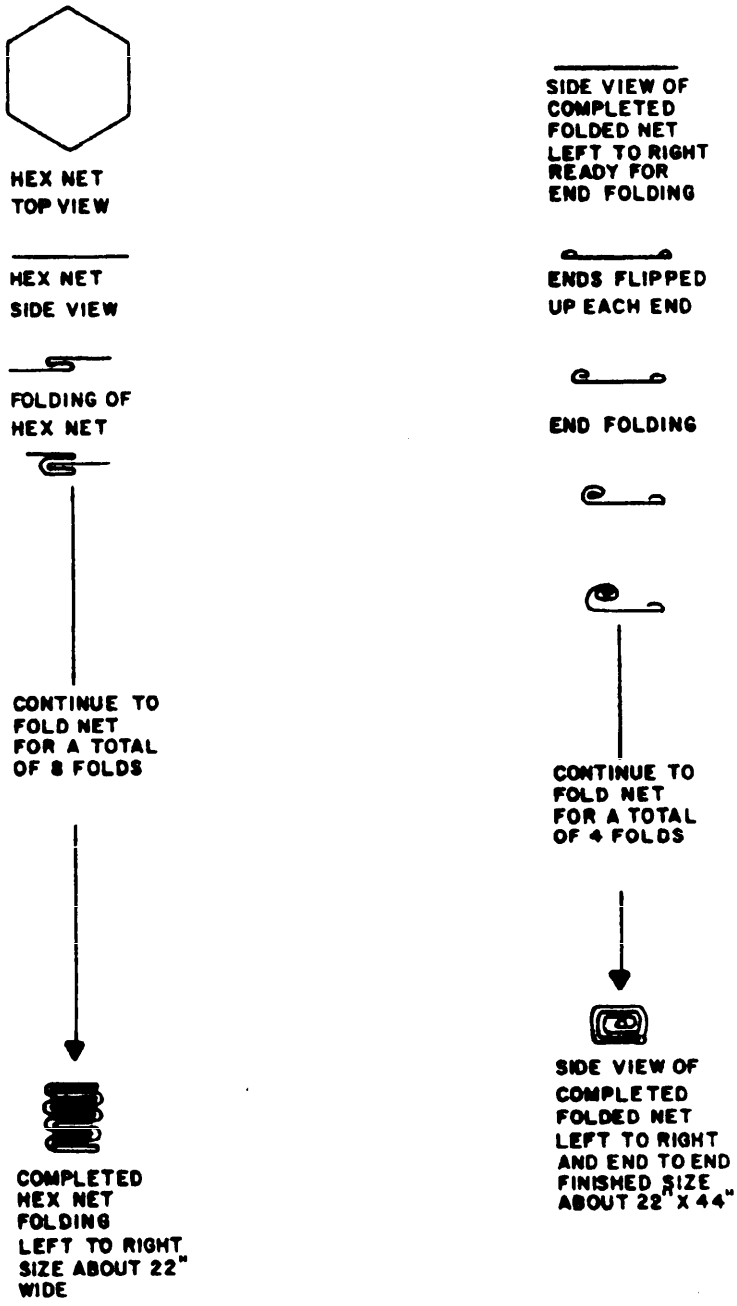


FIGURE 29. METHOD FOR FOLDING HEXAGON SCREEN FOR PACKAGING.

X-3116

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.


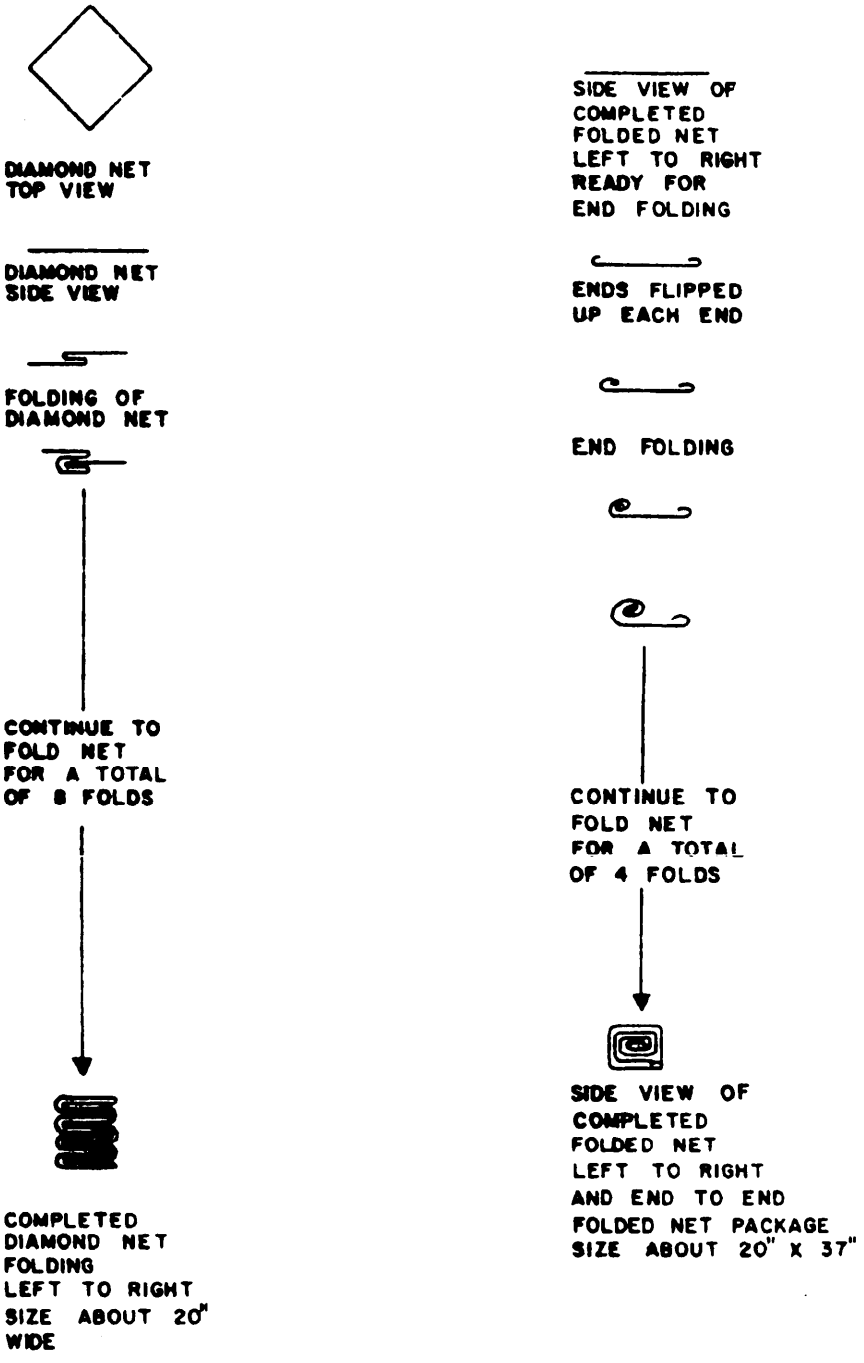


FIGURE 30. METHOD FOR FOLDING RHOMBIC SCREEN FOR PACKAGING

X-3117

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

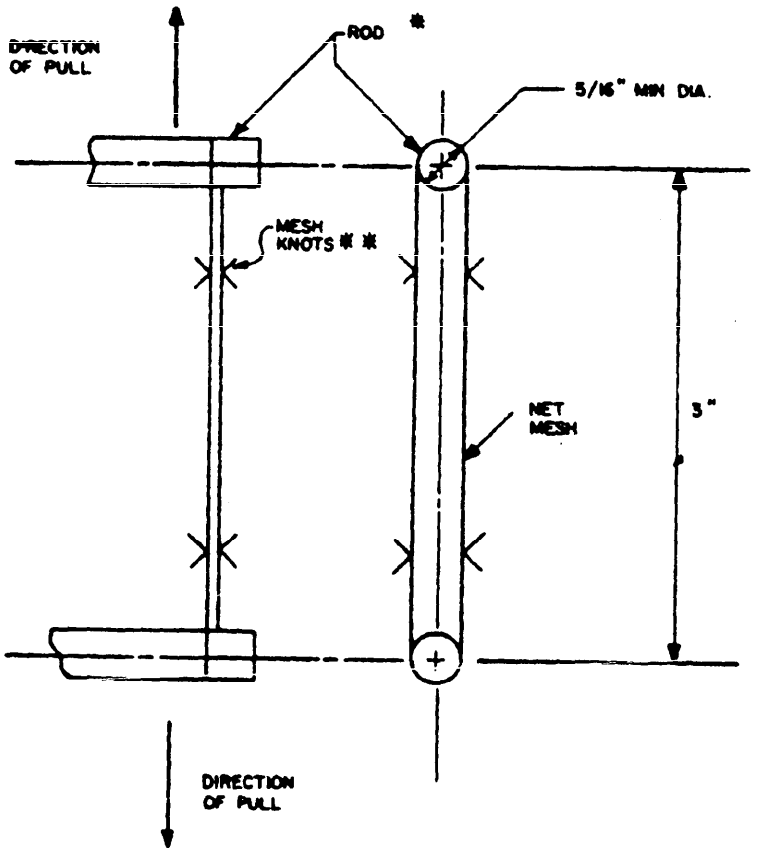


* HOOK (S) OF SAME DIAMETER ARE ACCEPTABLE IN LIEU OF RODS AS SHOWN.

* * LOCATION OF KNOTS OF NET MESH TO BE AS SHOWN ABOVE DURING THE MESH BREAKING TEST.

FIGURE 31. MESH BREAKING STRENGTH - TEST SPECIMEN SETUP

X-2581

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

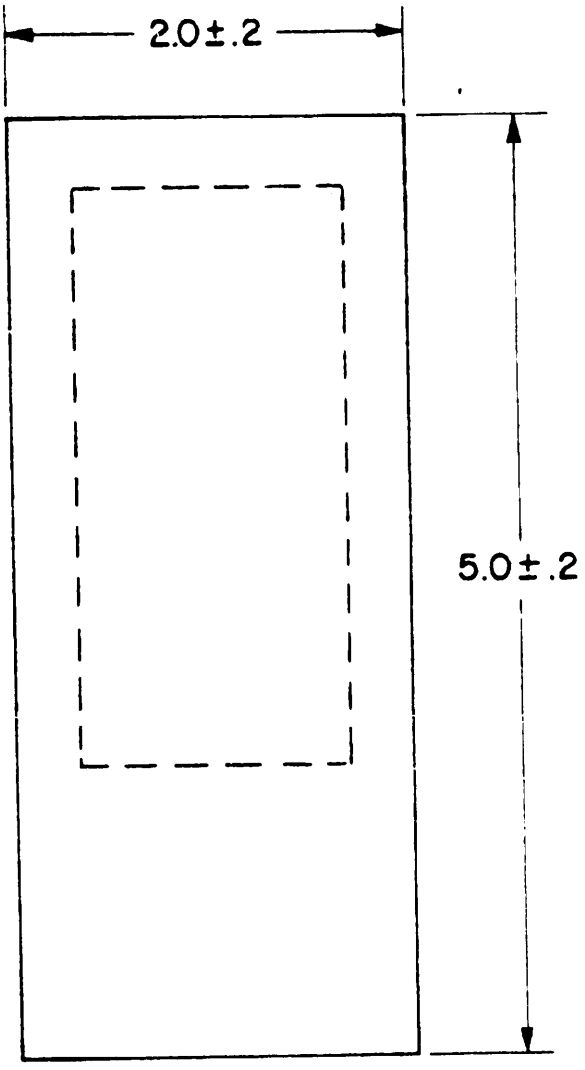


NOTE:
ALL DIMENSIONS IN INCHES

FIGURE 32.

IDENTIFICATION TAG FOR TYPE II SCREEN

X-2955

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

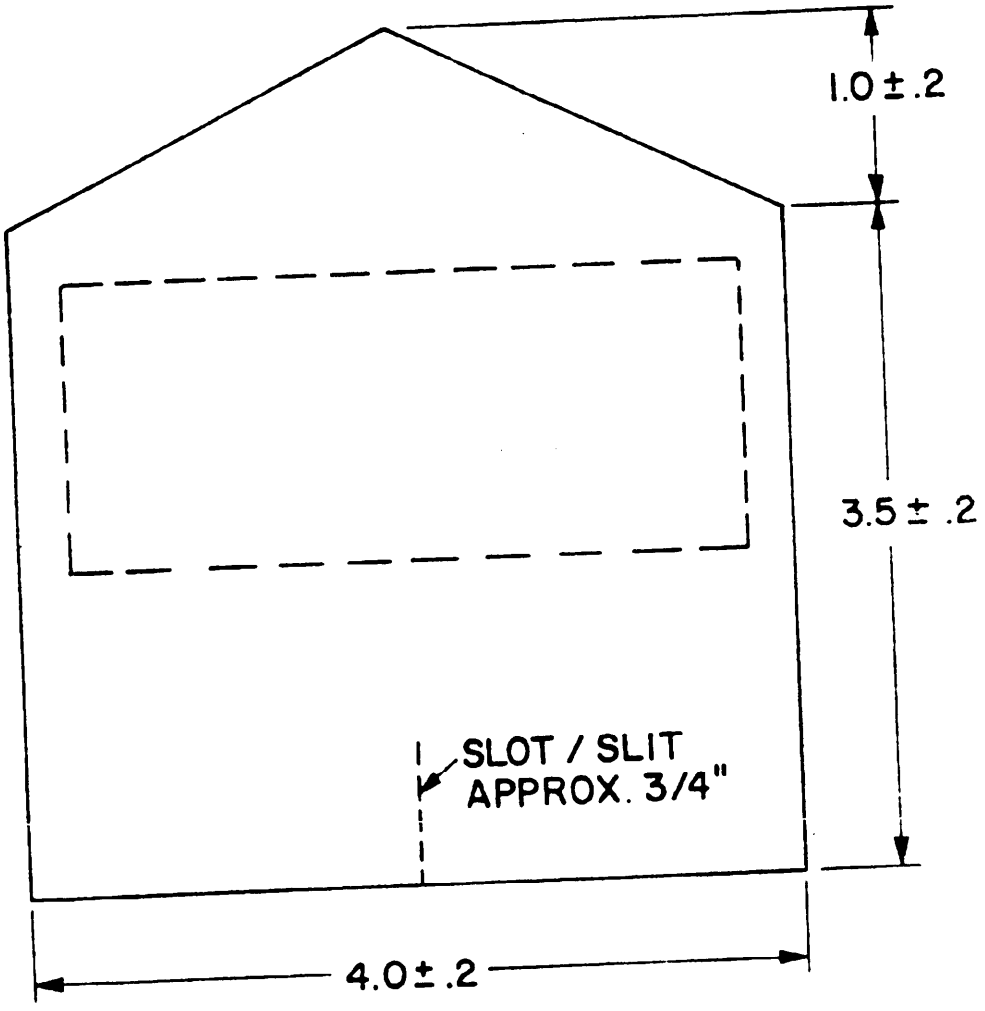


NOTE:
ALL DIMENSIONS IN INCHES

FIGURE 33.

IDENTIFICATION TAG FOR TYPE I SCREEN

X-2956

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

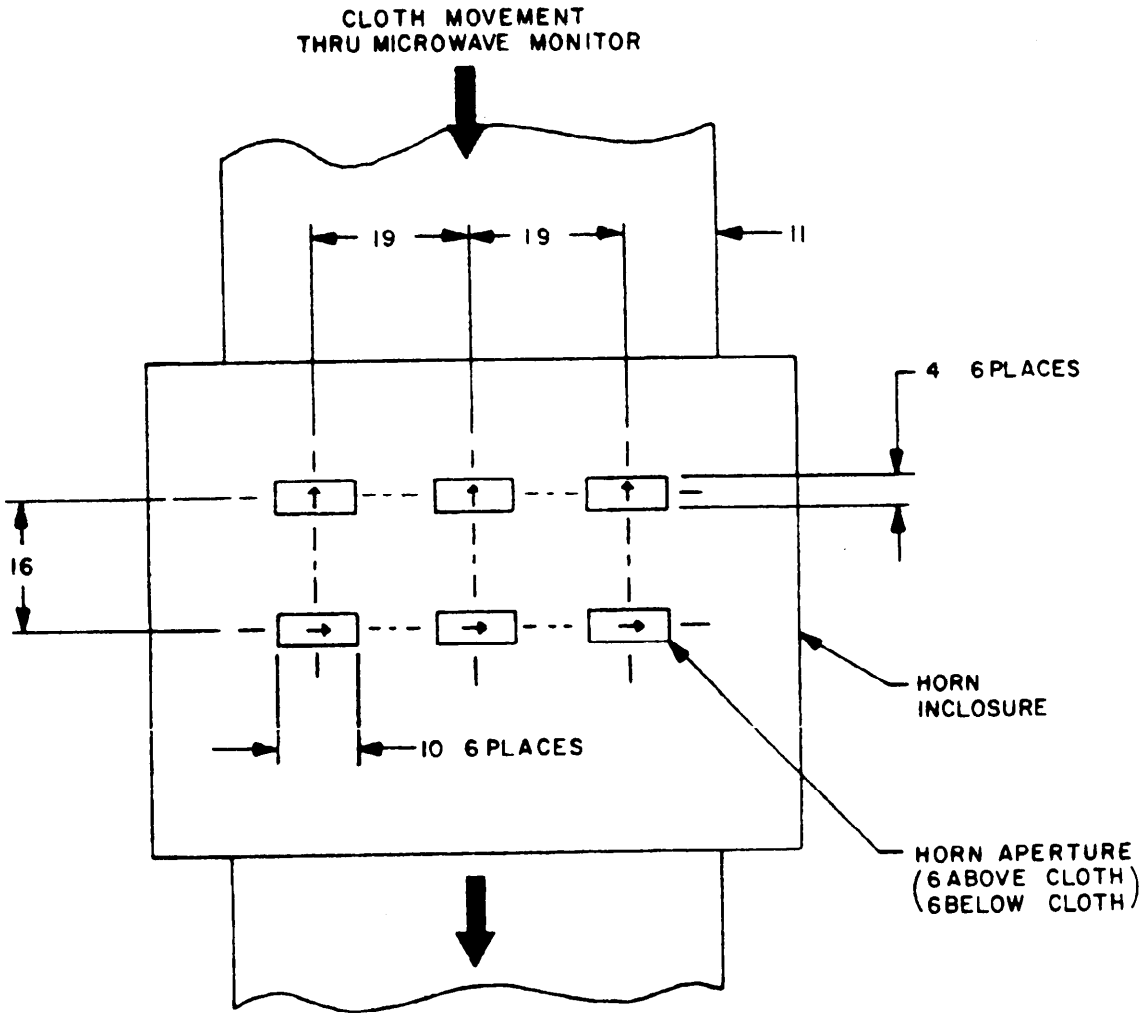

NOTE:
1. HORN POLARIZATION DENOTED BY DIRECTION OF ARROWS.
2 ALL DIMENSIONS ARE IN INCHES.
3. APPROXIMATE LOCATION OF HORNS.

FIGURE 34. APERTURE CONFIGURATION FOR MICROWAVE MONITOR.

X-3118

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Mobility Equipment Research & Development Command
ATTN: DRDME-DS
Fort Belvoir, VA 22060

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:10Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil - Downloaded: 2026-01-26T04:10Z
Check the source to verify that this is the current version before use.