MIL-D-52776A
19 July 1976
SUPERSEDING
MIL-D-52776(ME)
31 January 1974

MILITARY SPECIFICATION

DETECTOR, ANTI-INTRUSION: DT-509/GSQ

(MAGID T-4)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a magnetic anti-intrusion detection device.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-636	- Boxes, Shipping, Fiberboard.
PPP-C-843	- Cushioning Material, Cellulosic.
PPP-C-850	- Cushioning Material, Polystyrene, Expanded, Resilient (for Packaging Uses).

MILITARY

MIL-P-116	- Preservation-Packaging, Methods of.
MIL-C-45662	- Calibration System Requirements.

FSC 6350

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

MIL-H-46855	- Human Engineering Requirements for Military Systems, Equipment and Facilities.
MIL-P-60312	- Parts, Molded, Plastic Foam Polystyrene for Use with Ammunition.

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-454	- Standard General Requirement for Electronic Equipment.
MIL-STD-461	- Electromagnetic Interference Characteristics Requirements for Equipment.
MIL-STD-781	- Reliability Tests: Exponential Distribution.
MIL-STD-810	- Environmental Test Methods.
MIL-STD-1472	- Human Engineering Design Criteria for Military Systems, Equipment and Facilities.

FEDERAL

FED. STD. No. 356	- Commercial Packaging of Supplies and Equipment.

DRAWINGS

ME

TA13220E2400	- Magnetic Intrusion Detector T-4 DT-509/GSQ (MAGID T-4).

(Copies of specifications, standards, and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Description. The detector anti-intrusion: DT-509/GSQ (MAGID T-4) (hereinafter called "MAGID T-4 KIT") shall be in accordance with Top Assembly TA13220E2400 and as specified herein. The MAGID T-4 kit shall consist of the following components:

(a) Sensor assembly: DT-516/GSQ (Hereinafter called "MAGID T-4"). (NSN 6350-00-150-6970 w/o cable) (NSN 6350-00-150-6972 w/cable)
(b) External sensor assembly M x 9056 (hereinafter called "auxiliary solenoid"). (NSN 6350-00-150-6973)
(c) Emplacement kit. (NSN: N/A)
(d) Cable assembly - 30-foot cable. (NSN 6350-00-160-0630)
(e) Canvas carrying case. (NSN 6350-00-150-6974)

When specified (see 6.2), any of the five components listed above shall be furnished separately.

3.1.1 Drawings. The drawings forming a part of this specification are end product drawings. No deviation from the prescribed dimensions, materials, or tolerances is permissible without prior approval of the contracting officer. Any data (e.g., shop drawings, layouts, flow sheets, processing procedures, etc.) prepared by the contractor or obtained from a vendor to support fabrication and manufacture of the production item shall be made available, upon request, for inspection by the contracting officer or his designated representative.

3.2 First article (preproduction model). The contractor shall furnish one or more MAGID T-4 kits for examination and testing within the time frame specified (see 6.2) to prove prior to starting production that his production methods will produce MAGID T-4 kits that comply with the requirements of this specification. Examination and tests shall be as specified in Section 4; and, unless otherwise specified herein, all examinations and tests shall be conducted by the contractor subject to surveillance and approval by the Government (see 6.3). When specified (see 6.2), the Government will conduct any or all of the preproduction examinations and tests.

3.3 Initial production. When specified (see 6.2), the contractor shall furnish to the Government one or more MAGID T-4 kits for inspection as specified in 4.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

3.4 Material. Material shall be as specified herein and as shown on the applicable drawings. Inherently fungus-resistant or fungus-proofed material shall be used where applicable. MAGID T-4 kits fabricated of materials other than those specified herein and any design changes required due to the use of such materials shall be subject to the approval of the contracting officer.

3.5 Climatic, environmental, and structural requirements. The MAGID T-4, auxiliary solenoid, and cable assembly, shall suffer no degradation, deterioration, or change in tolerance limits which could in any manner affect operational, service, or maintenance requirements when tested in accordance with the following:

(a) Altitude (see 4.6.3.8.3).
(b) Humidity (see 4.6.3.8.4).
(c) Fungus (see 4.6.3.8.5).
(d) Salt fog (see 4.6.3.8.6).
(e) Immersion (see 4.6.3.8.7).
(f) Sunshine (see 4.6.3.8.8).
(g) High temperature (see 4.6.3.8.1).
(h) Low temperature (see 4.6.3.8.2).
(i) Temperature shock (see 4.6.3.8.9).
(j) Vibration (see 4.6.3.9.1).
(k) Bounce, loose cargo (see 4.6.3.9.2).
(l) Shock (drop) (see 4.6.3.9.3).
(m) Bench handling (see 4.6.3.9.4).

3.5.1 Humidity. There shall be no corrosion which could in any manner affect operational, service, or maintenance requirements.

3.5.2 Fungus. There shall be no evidence of viable fungus growth on any component or subassembly.

3.5.3 Salt fog. There shall be no corrosion or binding of moving parts.

3.5.4 Immersion. There shall be no evidence of leakage into the test item.

3.6 MAGID T-4. The MAGID T-4 is a hand-emplaced, recoverable, magnetic, intrusion detection device. The MAGID T-4 shall detect personnel passing through an area with ferromagnetic material on their person. The MAGID T-4 shall operate in a seismic/magnetic detection

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

mode with the MINISID III or as a magnetic-only external sensor to the MINISID III when the auxiliary solenoid is attached and the shorting plug removed. The MAGID T-4 shall have the required logic to sense when the auxiliary solenoid is attached and select the required mode of operation. The basic logic diagram is illustrated in Figure 1.

3.6.1 Operating voltage and current. The MAGID T-4 shall operate from 20 to 32 volts (V) direct current (dc) provided from the MINISID III. The maximum quiescent current shall be 0.250 milliamp (ma) at 28.0V dc. The maximum current drawn when an output signal is generated shall be 9.0 ma.

3.6.2 Solenoid. The solenoid shall exhibit the following frequency response and sensitivity when tested as specified in 4.6.3.2:

Frequency	Sensitivity (microvolts/gamma)
0.4 Hz	2.5
0.5 Hz	3.4
0.6 Hz	4.0
0.7 Hz	4.8
0.8 Hz	5.4
0.9 Hz	6.1
1.0 Hz	6.9
1.5 Hz	10.0
2.0 Hz	12.9
2.5 Hz	14.6
3.0 Hz	14.6
4.0 Hz	12.3
5.0 Hz	10.0
6.0 Hz	8.3
7.0 Hz	7.0
8.0 Hz	6.1
9.0 Hz	5.3
10.0 Hz	4.8
60.0 Hz	0.6

Note: Frequency tolerance shall be plus or minus 10 percent. Sensitivity tolerance shall be plus or minus 10 percent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

3.6.3 Infrasonic amplifier. The infrasonic amplifier, hereinafter called "amplifier", shall consist of a low noise transistorized bandpass pre-amplifier, a bandpass post-amplifier, and a three-stage low-pass filter. The amplifier voltage gain shall be measured as specified in 4.6.3.3.1 and shall have the frequency response and gain as shown in Table I.

TABLE I. Voltage gain versus frequency.

Frequency (Hertz)	Voltage gain
0.4 ± 10%	maximum 94% of 0.7 Hz voltage gain reading.
0.7 ± 10%	voltage gain as established in 4.6.3.3.1 (see note).
1.5 ± 10%	maximum 88% of 0.7 Hz voltage gain reading.
30.0 ± 10%	maximum 42 decibels.

Note: The voltage gain is established at 0.7 Hz and shall satisfy the equation:

$$\frac{\text{Threshold voltage (volts) as established in 4.6.3.4}}{\text{Voltage gain as established in 4.6.3.3.1}} = (160 \times 10\text{-}9) \pm 15\% \text{ v p-p}$$

Actual voltage gain shall be within ± 15% of calculated value.

Abbreviations used in the above Table I and the note are as follows: Hertz (Hz), peak-to-peak (p-p).

3.6.3.1 Amplifier output noise. The amplifier output noise level shall be less than 40 nanovolts rms times the voltage gain at 0.7 Hz and shall satisfy the accelerated output noise test in accordance with 4.6.3.3.2. The amplifier output noise shall be low enough to pass the false alarm test (see 4.6.3.6).

3.6.3.2 Amplifier recovery rate. The amplifier shall be out of a saturation condition within 3.0 seconds after the trailing edge of an applied 1.0, plus or minus 0.1, microvolt square pulse of 500, plus or minus 25, milliseconds (ms) duration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

3.6.4 Bipolar detector. The bipolar detector shall generate an output signal only when the threshold voltage of either polarity is exceeded at the amplifier output. The threshold voltage shall correspond to a sinusoidally varying 0.7 Hz, plus or minus 2 percent, magnetic field of 0.072, plus or minus 20 percent, gamma peak along the axis of the solenoid.

3.6.5 Detector processor. The detector processor shall consist of the following time function logic (see Figure 1).

3.6.5.1 Magnetic lockout. The magnetic lockout shall be a 0.7, plus or minus 0.1, second one-shot multivibrator, triggered by the output signal from the bipolar detector. The one-shot timing shall not be affected by additional input signals occurring during its "on" time.

3.6.5.2 Magnetic enable. The magnetic enable shall be a 2.3, plus or minus 0.3, second one-shot multivibrator. The one-shot shall be triggered by the trailing edge of the magnetic lockout output signal. The one-shot timing shall not be affected by input signals occurring during its "on" time.

3.6.5.3 Magnetic "AND" gate. The magnetic "AND" gate shall be a two-input "AND" gate. One input shall be the output of the bipolar detector, the second input shall be the magnetic enable output signal. When the magnetic enable and the bipolar detector inputs are present, the magnetic "AND" gate shall generate an output signal.

3.6.5.4 Detector enable gate. The detector enable gate shall be a two-input "AND" gate. One input shall be the seismic enable signal when the auxiliary solenoid is removed or shall be connected to a constant input when the shorting plug is used. The second input shall be the output signal of the magnetic "AND" gate. When both inputs are present, an output signal shall be generated.

3.6.5.5 Magnetic inhibit. The magnetic inhibit shall be 4.5, plus or minus 0.5, second one-shot multivibrator. The one-shot shall be triggered from the output signal of the detector enable gate. The one-shot timing shall not be affected by input signals occurring during its "on" time.

3.6.5.6 Output generator. The output generator shall be a 15, plus or minus 5, millisecond one-shot multivibrator. The one-shot shall be triggered by the leading edge of the magnetic inhibit output signal. The output generator shall be capable of driving a 1000, plus or minus 100, ohms resistive load and shall have the following characteristics:

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:10Z
Check the source to verify that this is the currentversion before use.

(a) Positive pulse amplitude of 5.6 to 6.3 volts peak.
(b) Pulse width of 10 to 20 milliseconds.
(c) Rise time of less than 0.2 milliseconds.
(d) Fall time of less than 0.5 milliseconds at 90 percent of 5.6 volts.
(e) Quiescent noise level of less than 50 millivolts peak.

3.6.5.7 Seismic enable. The seismic enable shall be a resetable 22, plus or minus 4, second one-shot multivibrator. The one-shot shall be triggered by signals having the characteristics specified in 3.6.5.6. The signals shall be coupled from the output connector. The one-shot timing shall be reset with each input signal. The maximum input signal rate shall be once every 6 seconds.

3.7 Auxiliary solenoid. The auxiliary solenoid shall have the same electrical characteristics as the MAGID T-4 solenoid (see 3.6.2). The auxiliary solenoid shall be capable of being attached to the MAGID T-4 by the 8-foot, plus or minus 3-inch, shielded, twisted pair, insulated cable, permanently attached to one end of the auxiliary solenoid.

3.8 False alarms. The MAGID T-4 and cable assembly shall function so as not to transmit any false alarms when tested in accordance with 4.6.3.6. The auxiliary solenoid is not included in this test.

3.9 Electromagnetic interference. The electromagnetic interference emission and susceptibility characteristics of the MAGID T-4, auxiliary solenoid, and cable assembly shall be within the limits defined in 4.6.3.10.

3.10 Burn-in. Each MAGID T-4, auxiliary solenoid, and cable assembly to be delivered to the Government shall be operated without failure for 48 consecutive hours with 100 activations per day.

3.11 Identification marking. A permanent serial number shall be stamped into the MAGID T-4 and auxiliary solenoid housing. No other identification marking shall be used.

3.12 Human engineering. Any changes to the detector shall emphasize human engineering design characteristics. Any changes shall be designed to conform to the applicable human engineering design criteria as stated in MIL-H-46855 and MIL-STD-1472.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

3.13 Reliability. The MAGID T-4 shall have a specified mean-time-between-failure (MTBF) of 15,000 hours and a minimum acceptable MTBF of 3000 hours, assuming 100 activations per day. When specified (see 6.2), reliability testing shall be conducted in accordance with 4.6.3.11.

3.13.1 Failure. A failure is defined as any malfunction that causes or may cause failure to commence operation, cessation of operation, or degradation of performance below levels specified herein.

3.14 Safety. The equipment shall meet the pertinent safety requirements of MIL-STD-454.

3.15 Workmanship. Workmanship shall be in accordance with MIL-STD-454, Requirement 9. These requirements are applicable to wiring, welding, brazing, plating, riveting, finishes, machine operations, screw assemblies, and freedom of parts from burrs, sharp edges, or any other damage or defect that could make the part or equipment unsuitable for the purpose intended.

3.15.1 Soldering. All soldering shall be performed in accordance with MIL-STD-454, Requirement 5.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications, standards, and drawings, as applicable.

4.1.2 Disassembly inspection. Failure of any test by the preproduction model shall be cause for disassembly, in the presence of a Government representative, of the preproduction model to the extent necessary to determine the cause of failure. Each disassembled part

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

shall be examined in detail for compliance with the specification and referenced drawings in regard to materials, dimensions, tolerances, and workmanship. Parts not complying with such requirements shall be rejected and shall be cause for rejection of the preproduction model.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

(a) Preproduction inspection (see 4.3).
(b) Initial production inspection (see 4.4).
(c) Quality conformance inspection (see 4.5).
(d) Inspection comparison (see 4.7).
(e) Inspection of packaging (see 4.8).

4.3 Preproduction inspection.

4.3.1 Examination. The preproduction MAGID T-4 kits shall be examined as specified in 4.6.1. Presence of one or more defects shall be cause for performing the inspection specified in 4.1.2.

4.3.2 Tests. The preproduction MAGID T-4 kits shall be subjected to the tests marked "X" in Column 1 of Table II. Failure of any test shall be cause for performing the inspection specified in 4.1.2.

4.4 Initial production inspection. When specified (see 6.3), one or more initial production MAGID T-4 kits will be selected at random by the Government from the MAGID T-4 kits being produced from production tooling and will be examined for the defects specified in 4.6.1 and subjected to the tests marked "X" in Column 2 of Table II to determine conformance to the requirements of this specification. The inspection will be performed by the Government at a site selected by the Government. Acceptance of an initial production MAGID T-4 kit shall not exclude the remaining MAGID T-4 kits from the quality conformance inspection and acceptance provisions specified in Section 4. In addition to any test specified as part of the initial production test, the Government reserves the right to conduct any and all other tests contained in this specification as part of the initial production test and failure of such additional tests shall have the same effect as failure of those tests specified as initial production tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

4.4.1 Inspection failure. Failure of an initial production MAGID T-4 kit to meet any requirement specified herein during and as a result of the inspection specified in 4.4 shall be cause for rejection of the initial production MAGID T-4 kit and shall be cause for refusal by the Government to continue acceptance of production MAGID T-4 kits until evidence has been provided by the contractor that corrective action has been taken to eliminate the deficiencies. Correction of such deficiencies shall be accomplished by the contractor at no cost to the Government on MAGID T-4 kits previously accepted and produced under the contract. Any deficiencies found as result of the initial production inspection will be considered prima facie evidence that all MAGID T-4 kits accepted prior to the completion of initial production inspection are similarly deficient unless evidence to the contrary is furnished by the contractor and such evidence is acceptable to the contracting officer.

4.5 Quality conformance inspection.

4.5.1 Sampling. Sampling for tests shall be in accordance with MIL-STD-105, Inspection Level II.

4.5.2 Examination. Each MAGID T-4 kit sample shall be examined for the possible defects specified in 4.6.1. AQL shall be 1.0 percent defective for major defects and 2.5 percent defective for minor defects.

4.5.3 Tests.

4.5.3.1 Individual. Each MAGID T-4 kit shall be subjected to the tests marked "X" in Column 3 of Table II. Failure of any test shall be cause for rejection.

4.5.3.2 Samples. Samples selected in accordance with 4.5.1 shall be subjected to the tests marked "X" in Column 4 of Table II. AQL shall be 1.5 percent defective.

4.6 Inspection procedure.

4.6.1 Examination. The MAGID T-4 kit shall be examined as specified in 4.5.2.1 for the following possible defects:

Major

101. Any part or component not in accordance with the requirements shown on the drawings.
102. Parts or components missing or not as specified.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the current version before use.

103. Electrical circuitry not protected from the effects of moisture and fungus growth.
104. Installation of wiring not as specified.

Minor

201. Workmanship not as specified.
202. Treatment and painting not as specified.
203. Identification or special marking missing, incomplete, or not legible.

4.6.2 Test schedule. The test schedule is contained in Table II.

TABLE II. Test schedule.

First article	Initial production and Inspection comparison	Quality conformance individual	Quality conformance samples	Test	Test paragraph	Requirement paragraph
1	2	3	4	5	6	7
X	-	X	-	Burn-in.	4.6.3.1.1	3.10
X	X	X	-	Solenoid.	4.6.3.2	3.6.2, 3.7
X	X	X	-	Infrasonic amplifier.	4.6.3.3	3.6.3
X	X	X	-	Bipolar detector.	4.6.3.4	3.6.4
X	X	X	-	Detector processor.	4.6.3.5	3.6.5
X	X	X	-	False alarms.	4.6.3.6	3.8
X	X	X	-	Field simulation.	4.6.3.7	3.5
X	X	-	-	Vibration.	4.6.3.9.1	3.5
X	X	-	X	Bounce.	4.6.3.9.2	3.5
X	X	-	X	Shock.	4.6.3.9.3	3.5
X	X	-	X	High Temp.	4.6.3.8.1	3.5
X	X	-	X	Low Temp.	4.6.3.8.2	3.5
X	X	-	X	Sunshine.	4.6.3.8.8	3.5
X	X	-	X	Temperature shock.	4.6.3.8.9	3.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

TABLE II. Test schedule.-Continued

1	2	3	4	5	6	7
X	X	X	-	Immersion.	4.6.3.8.7	3.5
X	X	-	-	Altitude.	4.6.3.8.3	3.5
X	X	X	-	Bench handling.	4.6.3.9.4	3.5
X	X	-	-	Humidity.	4.6.3.8.4	3.5
X	-	-	-	Salt fog.	4.6.3.8.6	3.5
X	-	-	-	Electromagnetic interference.	4.6.3.10	3.9
X	-	-	-	Fungus growth (Test A).	4.6.3.9.5.1	3.5
-	X	-	-	Fungus growth (Test B).	4.6.3.9.5.2	3.5
X	X	-	-	Reliability.	4.6.3.11	3.13

4.6.3 Tests.

4.6.3.1 Conditions. Unless otherwise specified, all tests shall be conducted at an ambient room temperature of 75° F, plus or minus 5° F, with the power ON.

4.6.3.1.1 Burn-In. Each MAGID T-4 shall be subjected to a 48-hour burn-in. During burn-in the MAGID T-4 shall be exercised through all of its functions 100 times each 24-hour period. Failures during burn-in shall be analyzed and corrective action taken when appropriate. Copies of failure reports shall be forwarded to the contracting officer. Only MAGID T-4 units that successfully complete the 48-hour burn-in shall be subjected to the testing specified in 4.6.2.

4.6.3.1.2 Test equipment calibration. Calibration of test equipment shall be in accordance with MIL-C-45662.

4.6.3.1.3 MINISID III and Portatale. The Government will loan a MINISID III and a Portatale AN/USQ-46A (see 6.7).

4.6.3.2 Solenoid. The two following tests shall be performed on all auxiliary and internal solenoids (see 3.6.2 and 3.7).

4.6.3.2.1 Sensitivity. Place the solenoid in a uniform sinusoidally varying magnetic field of 100 gamma, plus or minus 10 gamma, peak at 1.5 Hz, plus or minus 5 percent. This field shall generate an rms voltage of 0.666 millivolt, plus or minus 10 percent, in the solenoid.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

At 6.0 Hz, plus or minus 5 percent of 100 gamma, plus or minus 10 gamma, peak field shall generate an rms voltage of 0.425 millivolt, plus or minus 20 percent, in the solenoid. Inability to generate either voltage shall constitute failure of this test.

4.6.3.2.2 Balance. Connect each solenoid coil in parallel opposing with a solenoid standard (see 6.6.2) that is calibrated to meet the voltage output requirement as tested above. The solenoid standard and the MAGID T-4 solenoid shall be energized with a uniform sinusoidally varying magnetic field of 100 gamma, plus or minus 10 gamma, peak at 1.5 Hz, plus or minus 5 percent. A net voltage output of more than 0.013 millivolt shall constitute failure of this test.

4.6.3.3 Infrasonic amplifier. Place the amplifier board in a shielded container with buffered output circuits to prevent interference with the amplifier circuitry during testing. The oscillator used in all tests of the amplifier shall have a dc offset voltage which is less than 2 percent of the peak signal level being applied. The input to the amplifier shall be applied with respect to the nominally 4.1 volt bias voltage supply.

4.6.3.3.1 Voltage gain. With a 4200 ohm, plus or minus 1 percent, noninductive resistor connected across the amplifier input, measure the voltage gain over the frequency range of 0.40 to 1.5 Hz. Maintain an output signal voltage of not less than 1 volt nor greater than 3 volts peak. Voltage gain not within the limits specified in 3.6.3 and Table I shall constitute failure of this test.

4.6.3.3.2 Accelerated output noise. Connect a 4200 ohm, plus or minus 1 percent, noninductive resistor across the amplifier input without introducing any excitation. The accelerated output noise test shall be a 6-minute, plus or minus 10 seconds, test and shall indicate the amount of time the amplifier analog output signal exceeds a set threshold of 500 millivolts, plus or minus 2 percent, peak-to-peak. A time duration above this threshold greater than 11.2 percent for the 6 minute interval shall constitute failure of this test. (This compares with a false alarm rate of less than 10 alarms in 1000 hours.)

4.6.3.3.3 Recovery rate. Apply a 1.0 microvolt, plus or minus 0.1 microvolt, square pulse of 500 milliseconds, plus or minus 25 milliseconds, duration across a shielded 4200 ohm, plus or minus 1 percent, noninductive input resistor. Inability of the infrasonic amplifier to recover as specified in 3.6.3.2 shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

4.6.3.4 Bipolar detector. With an input signal 120 dB below 0.50 volt, plus or minus 0.05 volt, peak-to-peak at 0.7 Hz, plus or minus 2 percent, the positive threshold level shall be plus 1.1 volts, plus or minus 0.2 volt, and the negative threshold level shall be minus 1.1 volts, plus or minus 0.2 volt. Threshold levels outside of these limits shall constitute failure of this test.

4.6.3.5 Detector processor. Input signals to the logic board shall be negative going 50 ms, plus or minus 5.0 ms, signals whose normal quiescent levels are 8.2 volts, plus or minus 0.4 volt, dc and whose levels during the 50 ms, plus or minus 5.0 ms, pulses are 0.6 volt, plus or minus 0.2 volt dc. The input signal fall time shall be 400 microsec maximum. The number and spacing of input signals shall be as specified in the following tests. The seismic input shall be disabled unless otherwise specified.

4.6.3.5.1 Normal spacing test. Apply two signals whose leading edges are separated by not less than 0.85 second nor more than 2.55 seconds. Inability to generate one and only one output signal shall constitute failure of this test.

4.6.3.5.2 Wide spacing test. Apply two signals whose leading edges are separated by not less than 3.45 seconds nor more than 4.0 seconds. Generation of an output signal shall constitute failure of this test.

4.6.3.5.3 Narrow spacing test. Apply two signals whose leading edge are separated by 0.5 second, plus or minus 0.05 second. Generation of an output signal shall constitute failure of this test.

4.6.3.5.4 Inhibit test. Apply a series of nine signals whose leadin; edges are separated by 1 second, plus or minus 0.05 second. Inability to generate two or more output signals with a spacing between signals not less than 4.8 seconds shall constitute failure of this test.

4.6.3.5.5 Output pulse test. Apply the signal specified in 4.6.3.5.1. Nonconformance to 3.6.5.6 shall constitute failure of this test.

4.6.3.5.6 Seismic enable test. The seismic input shall be enabled for this test.

(a) Apply the signal specified in 3.6.5.7 to the seismic enable input. Generation of an output signal shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

(b) Apply the signal specified in 4.6.3.5.1 to the logic board input. Generation of an output signal shall constitute failure of this test. This test shall not be initiated until at least 30 seconds after the test in (a) is completed.
(c) Apply the signal specified in 3.6.5.7 to the seismic-enable input. Within 22 seconds, plus or minus 4 seconds, apply the signal specified in 4.6.3.5.1 to the logic board input. Inability to generate one and only one output signal shall constitute failure of this test.
(d) Apply two signals as specified in 3.6.5.7 at 10 seconds, plus or minus 1 second, apart. Within 32 seconds, plus or minus 5 seconds, apply the signal specified in 4.6.3.5.1 to the logic board input. Inability to generate one and only one output signal shall constitute failure of this test.

4.6.3.6 False alarm test. Connect a 4200 ohm, plus or minus 1 percent, noninductive resistor across the input of the amplifier. Generation of an alarm under the following conditions shall constitute failure of this test:

(a) No signal input in 4 hours with the detector processor warming from minus 25° F toward room temperature.
(b) When two sine waves of equal voltage, whose frequencies differ by 2.0 Hz, are applied to the input leads, when the amplitudes and frequencies are as follows:

(1) 100 microvolts rms at 30 and 32 Hz.
(2) 350 microvolts rms at 60 and 62 Hz.

4.6.3.7 Field simulation test. The MAGID T-4 with and without auxiliary solenoid shall have the following field simulation tests performed. The Government reserves the right to approve the calibration and test procedures used in the computer field simulation tests. Inability to pass one or more of the following ten tests (4.6.3.7.1 through 4.6.3.7.10) shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

4.6.3.7.1 Test 1, power.

(a) Connect a power supply to the unit under test.
(b) Allow the unit under test to stabilize for 3 minutes.
(c) Check the quiescent current at 28.0V dc. The quiescent current shall not exceed 0.250 milliamperes (see 3.6.1).

4.6.3.7.2 Test 2, seismic and magnetic.

(a) Activate the seismic and magnetic.
(b) Two seconds after activating the seismic input one-shot, excite the solenoid with a positive half cycle magnetic input.
(c) Four seconds after activating the seismic input one-shot, excite the solenoid with a positive half cycle magnetic input.
(d) Verify the following:

(1) One output occurred.
(2) The output signal risetime, falltime, pulse width, and pulse amplitude.

4.6.3.7.3 Test 3, seismic and magnetic.

(a) Activate the seismic input one-shot.
(b) Fifteen seconds after activating the seismic input one-shot, excite the solenoid with a positive half cycle magnetic input.
(c) Seventeen seconds after activating the seismic input one-shot, excite the solenoid with a positive half cycle magnetic input.
(d) Verify the following:

(1) One output occurred.
(2) The output signal risetime, falltime, pulse width, and pulse amplitude.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

4.6.3.7.4 Test 4, seismic and magnetic.

(a) Activate the seismic input one-shot.
(b) Twenty-six seconds after activating the seismic input one-shot, excite the solenoid with a positive half cycle magnetic input.
(c) Twenty-eight seconds after activating the seismic input one-shot, excite the solenoid with a positive half cycle magnetic input.
(d) Verify that no alarm occurs.

4.6.3.7.5 Test 5, single pulse and wide spacing.

(a) Connect a short from Pin C to Pin D on J1 of the unit under test.
(b) Excite the solenoid with a positive half cycle magnetic input.
(c) Verify that no alarm occurs.
(d) Excite the solenoid with a pair of positive half cycle magnetic inputs whose leading edges are separated by 3.5 seconds.
(e) Verify that no alarm occurs for a minimum of one out of five consecutive runs.

4.6.3.7.6 Test 6, time interval.

(a) Connect a short from Pin C to Pin D on J1 of the unit under test.
(b) Excite the solenoid with a continuous wave (CW) magnetic input for 10 seconds.
(c) Measure the time interval between the first and second alarms.
(d) Verify that the time is greater than 4.50 seconds.

4.6.3.7.7 Test 7, false alarm.

(a) Connect a short from Pin C to Pin D on J1 of the MAGID T-4 under test.
(b) Excite the solenoid with a low level CW magnetic input for 5 minutes.
(c) Verify that one alarm occurs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

Note: When performing this test at high temperature reduce the amplitude of the driving signal into the coil by one-half the value required at normal ambient temperature.

4.6.3.7.8 Test 8, sensitivity.

(a) Connect a short from Pin C to Pin D on J1 of the MAGID T-4 under test.
(b) Verify that the quiescent power supply current is less than 250 microamps.
(c) Verify the solenoid with eight pairs of positive half cycle magnetic inputs. The spacing or the leading edges of the two signals for each pair shall be 2 seconds.
(d) Verify that the pulsed current does not exceed 9 milliamperes.
(e) Verify that a minimum of seven alarms occur and all the output signal characteristics are valid.

4.6.3.7.9 Test 9, sensitivity.

(a) Connect a short from Pin C to Pin D on J1 of the MAGID T-4 under test.
(b) Excite the solenoid with eight pairs of negative half cycle magnetic inputs. The spacing of the leading edges of the two signals for each pair is to be 2 seconds.
(c) Verify that the pulsed current does not exceed 9 milliamperes.
(d) Verify that a minimum of seven alarms occur and all the output signal characteristics are valid.

4.6.3.7.10 Test 10, bandpass characteristics.

(a) Connect a short from Pin C to Pin D on J1 of the MAGID T-4 under test.
(b) Excite the solenoid with a CW generator at 1.5 Hz.
(c) Verify that the number of alarms is not less than ten.

4.6.3.8 Climatic environmental tests (power on). The following tests shall be conducted and any nonconformance to 3.5 shall constitute failure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

4.6.3.8.1 High temperature. The test item shall be subjected to the high temperature test as specified in Method 501.1, Procedure II of MIL-STD-810. The high operating temperature shall be 145° F.

4.6.3.8.2 Low temperature. The test item shall be subjected to the low temperature test as specified in Method 502.1, Procedure I of MIL-STD-810. The low storage temperature shall be minus 65° F. The storage period shall be 72 hours. The low operating temperature shall be minus 25° F.

4.6.3.8.3 Altitude. The test item shall be subjected to the altitude test as specified in Method 500.1 of MIL-STD-810, except that the storage altitude shall be 17,500 feet and the operational altitude shall be 10,000 feet.

4.6.3.8.4 Humidity. The test item shall be subjected to the humidity test as specified in Method 507.1, Procedure II of MIL-STD-810.

4.6.3.8.5 Fungus. Use the fungus test method as specified in 4.6.3.9.5.

4.6.3.8.6 Salt fog. The test item shall be subjected to the salt fog test as specified in Method 509.1, Procedure I of MIL-STD-810.

4.6.3.8.7 Immersion. The test item shall be subjected to the immersion test as specified in Method 512.1, Procedure I of MIL-STD-810.

4.6.3.8.8 Sunshine. The test item shall be subjected to the sunshine test as specified in Method 505.1, Procedure I of MIL-STD-810.

4.6.3.8.9 Temperature shock. The test item shall be subjected to the temperature shock test as specified in Method 503.1, Procedure I of MIL-STD-810.

4.6.3.9 Structural environmental test. The following tests shall be conducted and any nonconformance to 3.5 shall constitute failure.

4.6.3.9.1 Vibration. The test item shall be subjected to sinusoidal vibration in its three mutually perpendicular axes consisting of logarithmic cycling from 5 to 200 to 5 Hz. The sweep rate shall be 5 to

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

200 to 5 Hz in 12 minutes. Vibratory inputs to the test item shall be 1 inch double amplitude constant displacement from 5 to 7 Hz, 2.5 g's peak constant acceleration from 7 to 92 Hz, 0.0058 inch double amplitude constant displacement from 92 to 110 Hz, and 3.5 g's peak constant acceleration from 110 to 200 Hz. Total test times shall be 84 minutes per axis of vibration. Operational checks shall be performed after each axis of vibration.

4.6.3.9.2 Bounce, loose cargo. The test item shall be subjected to the bounce, loose cargo test as specified in Method 514.2, Procedure XI, Part 2 of MIL-STD-810. An operational check shall be performed after this test.

4.6.3.9.3 Shock (drop). The test item shall be subjected to the shock (drop) test as specified in Method 516.2, Procedure II of MIL-STD-810. An operational check shall be performed after this test.

4.6.3.9.4 Bench handling. The test item shall be subjected to the bench handling test as specified in Method 516.2, Procedure V of MIL-STD-810. An operational check shall be performed after this test.

4.6.3.9.5 Fungus growth.

4.6.3.9.5.1 Fungus growth (Test A). The MAGID T-4 kit shall be placed in the Tropical Testing Chamber, USAMERADCOM, Fort Belvoir, Virginia and subjected to exposure under simulated cyclic tropical conditions prevailing therein for a period of ninety (90) days (see 6.5). Environmental conditions within the chamber are as follows:

> The Tropical Testing Chamber is operated on a daily temperature-humidity cycle typical of a tropical area. For an 8-hour period, the temperature is held at 85° F and the relative humidity at 70 percent. During the next 8 hours of the cycle, the temperature is gradually lowered to 75° F and the relative humidity is raised to 95 percent. The temperature and relative humidity are then kept at 75° F and 95 percent for a 4-hour period, followed by a gradual change to 85° F and 70 percent during the next 4-hour period, which completes the cycle.

The chamber atmosphere is heavily charged with spores of various species of fungi and provides continuous inoculation of exposed items and materials to such an extent that artificial prior inoculation with fungus spores is unnecessary.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

The following list is representative of the fungi present in the chamber:

Acremonium alternatum	Memmoniella echinata
Ascotricha xylina	Mucor sp.
Aspergillus fluvus	Myrothecium verrucaria
Aspergillus niger	Nigrospora sphaerica
Aspergillus oryzae	Penicillium citrinum
Aspergillus terreus	Penicillium luteum
Aspergillus versicolor	Penicillium purpurogenum
Chaetomium bostrychodes	Penicillium stoloniferum
Chaetomium indicum	Pollularia sp.
Chaetomium globosum	Rhizopus nigricans
Coniothyrium sp.	Spicaria sp.
Curvularia sp.	Stachbotrys atra
Fusarium sp.	Trichoderma viride

Upon removal from the chamber after the 90-day exposure period, the MAGID T-4 kit shall be examined for damage (see 6.6.1). The MAGID T-4 kit shall be tested in accordance with 4.6.3.7. Any evidence of damage or inability to perform as specified in 4.6.3.7 shall constitute failure of this test.

4.6.3.9.5.2 Fungus growth (Test B). The MAGID T-4 kit shall be tested in accordance with MIL-STD-810, Method 508.1, Procedure I. After conclusion of the test, the MAGID T-4 kit shall be subjected to the tests marked "X" in Column 2 of Table II. Failure of any test or evidence of damage (see 6.6.1) shall constitute failure of this test.

4.6.3.10 Electromagnetic interference characteristics. Two MAGID T-4, auxiliary solenoid, and cable assemblies shall be tested in accordance with MIL-STD-461 for Class ID, RS01 and RS03. The contractor shall furnish the contracting officer the test plans and test reports in accordance with MIL-STD-461, except that the time interval for submission of reports shall be as specified (see 6.2). Upon approval of the reports by the contracting officer and provided all other requirements of the specification are met, the components meeting all requirements as specified herein shall be used as models for all production runs. Disapproval of any report shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

4.6.3.11 Reliability test. When specified (see 3.13), the MAGID T-4 shall be tested in accordance with MIL-STD-781, Test Plan VI. When this reliability test is to be conducted, the time frame for conducting the test, the number of MAGID T-4 units to be tested, and who shall perform the tests shall be as specified (see 6.2). The detector shall be activated 100 times per day during the reliability test. Accept/reject criteria shall be as specified in Test Plan VI of MIL-STD-781. Items selected for reliability testing shall have been "burned-in" as specified in 3.10 and shall have passed the quality conformance inspection specified in 4.5. Periodic performance checks shall be made throughout the reliability test. The reliability test shall be conducted under ambient environmental conditions. Nonconformance to 3.13 shall constitute failure of this test.

4.7 Inspection comparison. The Government may select MAGID T-4 kits at any time during the contract production period and subject these MAGID T-4 kits to the examination specified in 4.6.1 and the tests marked "X" in Column 2 of Table II to determine conformance to the requirements of this specification. The inspection will be performed by the Government, at a site selected by the Government, on units selected at random from those which have been accepted by the Government and will not include the previously inspected preproduction model and initial production MAGID T-4 kits. In addition to any test specified as part of the inspection comparison, the Government reserves the right to conduct any and all other tests contained in this specification as part of the inspection comparison and failure of such additional tests shall have the same effect as failure of those tests specified as inspection comparison.

4.7.1 Inspection failure. Failure of an inspection comparison MAGID T-4 kit to meet any requirement specified herein during and as a result of the examination and tests specified in 4.7 shall be cause for rejection of the inspection comparison MAGID T-4 kits and shall be cause for refusal by the Government to continue acceptance of production MAGID T-4 kits until evidence has been provided by the contractor that corrective action has been taken to eliminate the deficiencies. Correction of such deficiencies shall be accomplished by the contractor at no cost to the Government on MAGID T-4 kits previously accepted and produced under the contract. Any deficiencies found as a result of the inspection comparison will be considered prima facie evidence that all MAGID T-4 kits accepted prior to the completion of inspection comparison are similarly deficient unless evidence to the contrary is furnished by the contractor and such evidence is acceptable to the contracting officer.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the current version before use.

4.8 Inspection of packaging.

4.8.1 Preproduction pack inspection.

4.8.1.1 Examination. Examine the preproduction pack for the defects specified in 4.8.2.3. Presence of one or more defects shall be cause for rejection.

4.8.2 Quality conformance inspection of pack.

4.8.2.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.8.2.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.8.2.3 Examination. Samples selected in accordance with 4.8.2.2 shall be examined for the following possible defects. AQL shall be 1.0 percent defective for major defects and 2.5 percent defective for minor defects.

Major

105. Materials, methods, and containers not as specified for Level A or B. Each incorrect material, method, or container shall be considered one defect.
106. Components not cushioned and secured within the box as specified.
107. Box not sealed as specified for Level A.
108. Packing not as specified for Level A or B.
109. Gross weight of wood boxes exceeds 100 pounds for Level A or B.
110. Gross weight or size of fiberboard boxes exceeds the box specifications for Level B.

Minor

204. Marking missing, illegible, incorrect, or incomplete for Level A, B, or Commercial.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preproduction pack. The contractor shall furnish a preproduction pack for examination of the complete MAGID T-4 kit or separately procured components within the time frame specified (see 6.2) to prove prior to starting production that the applied preservation, packing, and marking comply with the preparation for delivery requirements of this specification. Examination shall be as specified in Section 4 and shall be subjected to surveillance and approval by the Government (see 6.4). The preproduction pack may be accomplished utilizing either the preproduction kit or components as applicable or the production kit or components as applicable. If the preproduction model kit or components are utilized, any preservation, and packing shall be removed by the contractor at no expense to the Government when requested by the Government to facilitate comparison between the preproduction model kit or components and the production kit or components.

5.2 Preservation. Preservation shall be Level A or Commercial, as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Procurement of complete detector kits.

5.2.1.1.1 Sensor assembly, cable, carrying case, and technical publications. The sensor assembly, cable, and canvas carrying case shall be placed together in a box conforming to PPP-B-636, W6c. The components shall be cushioned and secured within the box in a manner to prevent movement or damage with molded forms of expanded polystyrene, fabricated from material conforming to MIL-P-60312, Type II, Class 1, with cushioning conforming to PPP-C-850, Type I, Class 3, or with cushioning conforming to PPP-C-843, Type II, Class B. Technical publications shall be preserved in accordance with MIL-P-116, Method IC-1, and placed in the box. The box shall be closed and sealed as specified for Method V in the appendix to the box specification.

5.2.1.1.2 External sensor assembly and emplacement kit. The external sensor assembly and emplacement kit shall be preserved together as specified in 5.2.1.1.1.

5.2.1.2 Detector components procured separately. MAGID T-4 components of like description shall be preserved together in the quantities specified (see 6.2). Preservation of the components shall be as specified in 5.2.1.1.1.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the current version before use.

5.2.2 Commercial. Commercial preservation of complete detector kits or detector components when procured separately shall be in accordance with FED. STD. No. 356.

5.3 Packing. Packing shall be Level A, B, or Commercial, as specified (see 6.2).

5.3.1 Level A.

5.3.1.1 Procurement of complete MAGID T-4 kits. Components contained within the fiberboard boxes as specified in 5.2.1 and 5.2.2, comprising complete detector kits, shall be packed together in quantities not to exceed 100 pounds, in a close-fitting wood box conforming to PPP-B-501, Overseas Type, Grade B, style optional. The fiberboard boxes shall be blocked within the wood box in a manner to prevent movement. Box closure and strapping shall be in accordance with the appendix to the box specification.

5.3.1.2 MAGID T-4 components procured separately. MAGID T-4 components procured separately shall be packed together as specified in 5.3.1.1.

5.3.2 Level B. Packing shall be as specified in 5.3.1, except boxes shall be Domestic Type. As an alternate, boxes conforming to PPP-B-636, V3c may be used when the quantity to be packed does not exceed the weight or size limitation of the box. Box closure and strapping shall be in accordance with the appendix to the applicable box specification.

5.3.3 Commercial. Commercial packing of complete detector kits or components procured separately shall be in accordance with FED. STD. No. 356.

5.4 Marking.

5.4.1 Military packaging. Marking shall be in accordance with MIL-STD-129.

5.4.2 Commercial packaging. Marking shall be in accordance with FED. STD. No. 356.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The MAGID T-4 kit is intended for use with the MINISID III in detecting the passage of personnel within an area around the solenoid.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) When components are to be furnished separately (see 3.1).
(c) Time frame required for submission of preproduction model and number of MAGID T-4 kits required (see 3.2).
(d) When the Government will conduct any or all of the preproduction model examination and tests. When the Government will conduct some but not all of the preproduction examination and tests, the contracting officer should specify which examination and tests will be conducted by the Government and which examination and tests shall be conducted by the contractor (see 3.2).
(e) When initial production inspection is required, and number of MAGID T-4 kits to be furnished, when applicable (see 3.3).
(f) Time interval for submission of electromagnetic interference test plans and test reports (see 4.6.3.10).
(g) When reliability test is required, the time frame for conducting the reliability test, the number of MAGID T-4 units to be tested, and who shall perform the test (see 3.13 and 4.6.3.11).
(h) Time frame required for submission of preproduction pack (see 5.1).
(i) Degree of preservation and packing required (see 5.2 and 5.3).
(j) Quantity of components to be preserved together (see 5.2.1.2).

6.3 Preproduction model. Any changes or deviations of production MAGID T-4 kits from the approved preproduction model during production will be subject to the approval of the contracting officer. Approval of the preproduction model will not relieve the contractor of his obligation to furnish MAGID T-4 kits conforming to this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

6.4 Preproduction pack. Any changes or deviations of production packs from the approved preproduction pack will be subject to the approval of the contracting officer. Approval of the preproduction pack will not relieve the contractor of his obligation to preserve, pack, and mark the complete detector kits or separately procured detector components in accordance with this specification.

6.5 Tropical test chamber. When specified, the contracting officer will arrange to provide the tropical test chamber at USAMERADCOM, Fort Belvoir, VA for use in testing the MAGID T-4 kit (see 4.6.3.9.5).

6.6 Definitions.

6.6.1 Damage. Damage is deformation, loosening, breakage, corrosion, or change of fit of any component or part or any physical condition resulting in nonconformance to the provisions of this specification.

6.6.2 Solenoid standard. The solenoid standard is one whose sensitivity is set precisely, within accuracy limits of test equipment, to the nominal value at 1.5 Hz required by 4.6.3.2. The contractor shall supply the unit to be used as the solenoid standard.

6.7 Government-loaned property. The contracting officer should arrange to loan the property specified in 4.6.3.1.2.

Custodians:
Army - ME
Navy - SH
Air Force - 99

Preparing activity:
Army - ME

Project 6350-0038

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

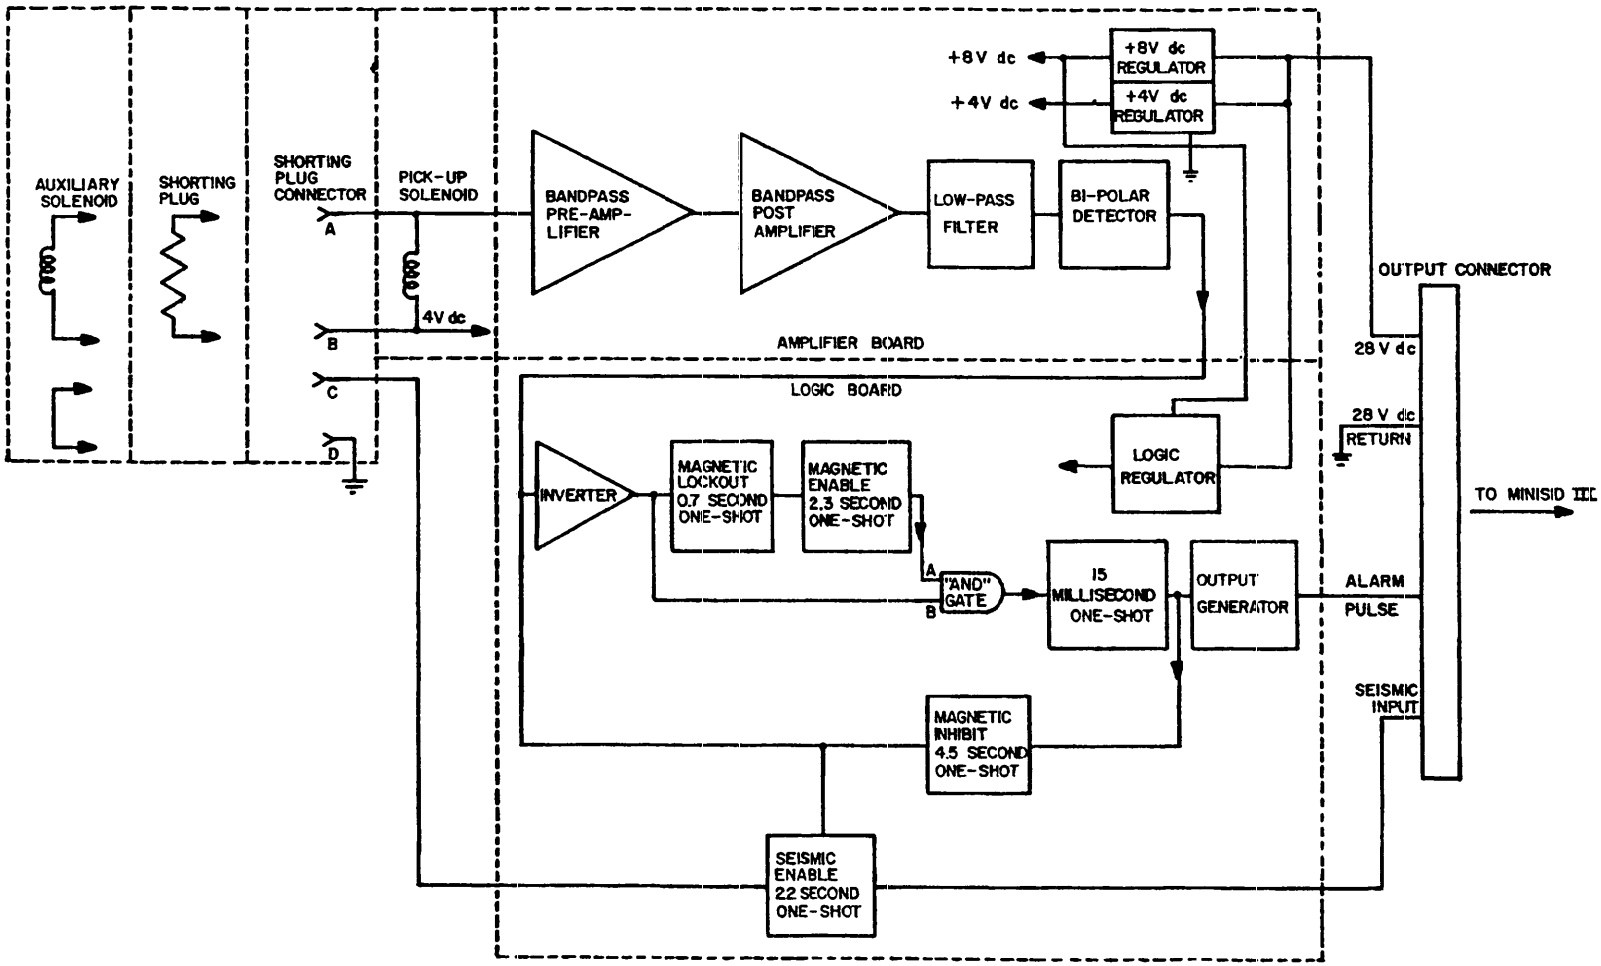


FIGURE 1. MAGID T-4 BLOCK DIAGRAM

☆U.S. GOVERNMENT PRINTING OFFICE: 1976-603-766/5683

X-2633A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE MIL-D-52776A Detector, Anti-Intrusion: DT-509/GSQ (MAGID T-4)

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:10Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Mobility Equipment Research and
Development Command
ATTN: DRXFB-DS
Ft. Belvoir, VA 22060

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:10Z
Check the source to verify that this is the current version before use.