MILITARY SPECIFICATION

AUGER, EARTH, TRUCK-MOUNTED, 36-INCH DIAMETER HOLE, 60-FOOT MAXIMUM DEPTH

1. SCOPE

1.1 This specification covers a diesel-engine-driven auger for digging large-diameter holes and setting casing.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

GG-P-455	- Plate, Photographic (Photosensitive Aluminum).
QQ-S-781	- Steel, Strapping, Flat.
QQ-S-790	- Steel, Strapping, Round (Bare and Zinc-Coating).
RR-W-410	- Wire Rope and Strand.
TT-P-664	- Primer, Coating, Synthetic, Rust-Inhibiting, Lacquer-Resisting.
UU-T-81	- Tags, Shipping and Stock.
ZZ-H-428	- Hose, Rubber: Preformed and Straight; Hose, Preformed: Flexible, Wire-Reinforced, (for the Coolant Systems of Automotive and other Liquid-Cooled Engines).
ZZ-I-550	- Inner Tube, Pneumatic Tire.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-621	- Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636	- Box, Fiberboard.
PPP-T-60	- Tape: Pressure-Sensitive Adhesive, Waterproof, for Packaging.

Military

MIL-P-116	- Preservation, Methods of.
MIL-B-121	- Barrier Material, Greaseproofed, Waterproofed, Flexible.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

MIL-P-514 - Plates, Identification; Transportation-Data and Blank.
MIL-T-704 - Treatment and Painting of Material.
MIL-C-3774 - Crates, Wood; Open, 12,000- and 16,000-Pound Capacity.
MIL-G-3787 - Glass, Laminated, Flat; (Except Aircraft).
MIL-G-3859 - Grease Guns, Hand, High-Pressure, Lever-Operated (15-Ounce and 21-Ounce Capacity).
MIL-E-10062 - Engines: Preparation for Shipment and Storage of.
MIL-P-10603 - Pumps and Pumping Units, Centrifugal, Power Driven, for Water, Packaging of.
MIL-G-10924 - Grease, Automotive and Artillery.
MIL-B-11040 - Belt, V; Engine Accessory Drive.
MIL-B-11188 - Batteries, Storage: Lead-Acid.
MIL-E-11276 - Engines, Diesel: Industrial, Medium- and High-Speed, General Specification for.
MIL-E-11278 - Engines, Gasoline or Diesel, Industrial Type, Methods of Test.
MIL-T-12459 - Tires, Pneumatic; for Military Ground Vehicles.
MIL-L-13071 - Lamp, Housing, Resilient Mounting, for Construction Machinery.
MIL-H-13531 - Hose, Rubber, and Hose Assembly, Rubber (Hydraulic, Flexible).
MIL-H-15424 - Hand Tools; Packaging of.
MIL-G-23827 - Grease, Aircraft and Instrument, Gear and Actuator Screw.

STANDARDS

Military

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-130 - Identification Marking of U.S. Military Property.
MIL-STD-281 - Automobiles, Trucks, Truck-Tractors, Trailers and Trailer Dollies; Preservation and Packaging of.
MIL-STD-1186 - Cushioning, Anchoring, Bracing, Blocking, and Waterproofing; with Appropriate Test Methods.
MIL-STD-1223 - Administrative Wheeled Vehicle Undercoating, Treatment, Painting and Data Plates Standard.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

MS15003	- Fittings, Lubrication (Hydraulic) Surface Check, 1/8 Pipe Threads, Steel, Type III.
MS17165	- Lamp, Incandescent, PAR-46, 24 Volt, Flood-lamp, Mogul End Prong Base.
MS24207	- Coupling, Grease Gun.
MS33586	- Metals, Definition of Dissimilar.
MS33800	- Connector, Receptacle, Electrical-Pin Contact, No. 12, 14 & 16 A.W.G., Waterproof.
MS35000	- Battery, Storage, Lead-Acid, Waterproof, for Tactical Vehicles.
MS35388	- Tire, Pneumatic; Passenger Car, Light Truck, Truck and Bus.
MS35392	- Inner Tube, Pneumatic Tire.
MS35643	- Gasket: Cap, Fuel Tank.
MS35644	- Filler Neck Assembly, Fuel Tank, Military Vehicles.
MS35645	- Cap, Fuel Tank, Tactical Vehicle, Fording.
MS35844	- Plug, Machine Thread; Magnetic (Drain).
MS39247	- Air Cleaner, Intake; Dry-Type, for Internal Combustion Engine (Class I and II).
MS51317	- Light, Warning, Vehicular, Rotating, D.C.
MS53063	- Indicator, Air Cleaner, Intake; Restriction Mechanical Type.
MS75057	- Connector, Plug, Electrical-Slave, 2 Contact, 24 Volt, Waterproof.
MS75058	- Connector, Receptacle, Electrical-Slave, 2 Contact, 24 Volt, Waterproof.

DRAWINGS

MO(ATAC)

7056674	- Cable, Waterproof, Electrical.
8343583	- Cradle, Chock Block.
8343584	- Block Assy., Chock.

(Copies of specifications, standards, and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

ASSOCIATION OF AMERICAN RAILROADS

Rules Governing the Loading of Commodities on Open Top Cars.

(Application for copies should be addressed to the Association of American Railroads, Transportation Building, Washington 6, D. C.)

AMERICAN TRUCKING ASSOCIATION

National Motor Freight Classification Rules.

(Application for copies should be addressed to the American Trucking Association, 1616 P Street NW, Washington, D. C. 20036.)

OFFICIAL CLASSIFICATION COMMITTEE

Uniform Freight Classification Rules.

(Application for copies should be addressed to the Official Classification Committee, 1 Park Avenue at 33rd Street, New York, N.Y. 10016.)

INTERSTATE COMMERCE COMMISSION

Motor Carrier Safety Regulations.

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, D. C. 20402.)

SOCIETY OF AUTOMOTIVE ENGINEERS

SAE Handbook.

(Application for copies should be addressed to the Society of Automotive Engineers, 485 Lexington Avenue, New York 17, N. Y.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS

C170-50 - Method of Test for Compressive Strength of Natural Building Stone.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pa. 19103)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

NATIONAL BUREAU OF STANDARDS

Handbook H28 - Screw-Thread Standards for Federal Services

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, D. C.)

STATE OF CALIFORNIA DEPARTMENT OF MOTOR VEHICLES

California Motor Vehicle Code

(Application for copies should be addressed to the State of California, Department of Motor Vehicles, P.O. Box 1319, Sacramento 6, California.)

HYDRAULIC INSTITUTE

Centrifugal Pumps, Rating Standards and Test Code Standards of the Hydraulic Institute.

(Application for copies should be addressed to the Hydraulic Institute, 122 East 42nd Street, New York 17, N. Y.)

3. REQUIREMENTS

3.1 Description. The earth auger shall consist of a turntable-mounted power-unit superstructure mounted on a heavy-duty, truck-type carrier unit. The auger shall be equipped for setting hole casings. A water pump shall be furnished with the auger for delivering water to the dug holes.

3.1.1 Performance. The auger shall meet the following performance requirements:

(a) At an elevation of 5,000 feet, dig 36-inch-diameter vertical holes to a depth of 60 feet in the material specified in 3.1.1.1.1.
(b) Dig 36-inch-diameter holes at any angle from vertical to 45 degrees from vertical, in 5-degree increments, in the material specified in 3.1.1.1.1.
(c) When digging the holes specified in (a) above, the auger shall dispose of the spoil away from the hole so as not to require the assistance of men or equipment other than the auger operator and the auger to handle the spoil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

(d) Set 30-foot lengths of 30-inch-inside-diameter casing in the holes specified in (a) above.
(e) The penetration rate using a 36-inch auger bit shall be not less than 2 feet per minute (fpm) in the soil specified in 3.1.1.1.2 (a) and not less than 1 fpm in the soft rock specified in 3.1.1.1.2 (b).
(f) The auger shall pick up the auger bits from the pockets specified in 3.10.18 and place them on the ground in such a location and position that the auger bit socket can be attached to the kelly bar without moving the carrier.
(g) The auger shall ascend a 40 percent grade without assistance. The auger shall maintain a speed of 35 miles per hour on a 1 percent grade.

3.1.1.1 Materials to establish digging performance.

3.1.1.1.1 For determination of depth and angle capability. This material shall be any natural undisturbed soil, soft rock, or combination of soil and soft rock. Soft rock shall be as specified in 3.1.1.1.2 (b).

3.1.1.1.2 For determination of penetration rate. This material shall be as specified below:

(a) Soil shall be a well-compacted, coarse-grained, well-graded, gravel-sand-clay mixture with an excellent binder and medium to high dry strength (see 6.4).
(b) Soft rock shall be rock having an average unconfined compressive strength of not less than 2,000 psi when tested in accordance with ASTM C170-50.

3.2 Preproduction model. The supplier shall furnish an auger within the time frame specified in the contract or purchase order to prove, prior to starting production, that his production methods and choice of design detail will produce augers that comply with the requirements of this specification. Examination and test shall be those specified herein. Any changes or deviations from the preproduction model during production shall be subject to the approval of the contracting officer. Approval of the preproduction model by the activity concerned shall not relieve the supplier of his obligation to furnish augers conforming to this specification.

3.3 Material. Material shall be as specified herein. Materials not specified shall be selected by the supplier and shall be subject to all provisions of this specification. Materials and special treatments shall be utilized to prevent corrosion and to resist harmful effects of dust, water, and fungi.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

3.3.1 Threaded parts. Threaded parts shall be in accordance with Handbook H28.

3.3.2 V-belts. V-belts shall conform to MIL-B-11040, and all belts for multiple-belt drives shall be furnished tied together as sets and tagged as matched sets in accordance with MIL-B-11040.

3.3.3 Hose. Coolant hose shall conform to ZZ-H-428, type I or II, grade A. Hydraulic and pneumatic hose shall conform to MIL-H-13531, type I or II, class A.

3.3.4 Dissimilar metals. Unless suitably protected against electrolytic corrosion, dissimilar metals shall not be used in intimate contact with each other. Dissimilar metals are defined in MS33586.

3.4 ICC regulations. Each auger shall conform to all applicable requirements of the ICC Motor Carrier Safety Regulations, except as specified herein.

3.5 Operating temperature requirements. The auger shall perform as specified herein in any ambient temperature from plus 32°F. to 125°F.

3.6 Safety. All exposed parts which are subject to high operating temperatures or which are energized electrically shall be insulated, enclosed, or guarded. All moving parts, except the kelly bar, which are of such nature or so located as to be a hazard to operating or maintenance personnel and subject to breakage or entanglement with wire ropes shall be enclosed or guarded. Guards shall be provided to prevent dripping of grease or oil onto other components. Protective devices shall not impair the operating functions.

3.7 Ease of maintenance. All major assemblies and installed attachments shall be accessible for maintenance, repair, and replacement. Covers, plates, and safety guards which must be removed for component adjustment, servicing, repair, replacement, or maintenance shall be equipped with fastenings. All subassemblies shall be plainly matchmarked for ease of assembly and for adjustment. Alining devices such as dowels and guides shall be used to aid reassembly. Items such as connections, plugs, and valves shall be standardized types, and the number of different sizes shall be held to a minimum. Plugs conforming to MS35844 shall be used in lubrication reserviors. Drain holes shall be furnished with facilities, where required, for draining to the ground or with space for draining into a 2-gallon bucket.

3.8 Weight and dimensions. The weight and dimensions of the auger without attachments shall not exceed the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

Weight (G.V.W.)	60,000 pounds
Width	96 inches
Height	160 inches
Length	528 inches

3.8.1 Angle of approach and departure. The angle of approach and departure as defined in SAE J894 shall be 17 degrees (minimum) front and rear.

3.9 Rotating superstructure. The rotating superstructure shall consist of a turntable, mounting platform, and operating machinery. All operating machinery shall be mounted on or attached to the platform.

3.9.1 Turntable. The turntable shall rotate at least 160 degrees to the left and to the right from the centerline of the rear of the truck chassis. A swing lock shall be provided to lock the rotating superstructure when in travel position. A brake shall be provided to hold the rotating superstructure in position at any point of the swing.

3.9.2 Mounting platform. The mounting platform shall be of a size to support all the operating machinery and the operator. An expanded metal or raised pattern deck plate not less than 1/8 inch thick shall cover the operator's working area of the top surface of the platform. The deck plate shall be painted with nonskid, abrasive-type, deck paint. The platform shall extend and retract horizontally a distance of not less than 4 feet.

3.9.3 Service winch. A two-speed service winch shall be furnished with a baredrum-line pull of not less than 16,000 pounds at low speed and 8,000 pounds at high speed. The maximum bare drum-line speed shall be not less than 90 fpm at low speed and 180 fpm at high speed. The brake lever shall be of the positive-locking type. The service winch drum shall have a spooling capacity of not less than 200 feet of 5/8-inch-diameter wire rope.

3.9.3.1 Service line. The drum shall be wound with 200 feet of 5/8-inch-diameter wire rope conforming to RR-W-410, type I, class 4, construction 4, 8 by 19, improved plow steel, right regular lay, preformed, uncoated. The free end of the rope shall be fitted with a safety clevis.

3.9.4 Crown block. The derrick shall be fitted with a crown block assembly. Sheaves shall be furnished with provisions for preventing the wire rope from jumping off the sheave grooves and shall be equipped with self-lubricating antifriction bearings. An eye-type anchor shall be attached to the underside of the crown block.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

3.9.5 Derrick. The derrick shall be constructed of an electrically welded steel tubing frame consisting of four legs reinforced with diagonals and cross members. The derrick shall be rated by its manufacturer to sustain a gross axial capacity of 60,000 pounds and shall be of sufficient height to accommodate 30-foot-long sections of casing. The derrick shall be equipped with kelly holders to attach the kelly bar to the derrick for transit. The derrick shall be raised and lowered hydraulically by two cylinders not less than 6 inches in diameter. Each cylinder shall be provided with one or more pilot-operated check valves.

3.9.6 Kelly. The kelly shall be of the telescoping type. The outer kelly bar shall be not less than 5-1/4-inch square or 6-inch in diameter. The inner kelly shall have an individual hoist operated by a hand lever and controlled by a brake foot pedal. A lock or brake shall be incorporated to prevent the outer and inner kelly bars from telescoping when maximum down pressure is applied to the auger bit at any point during the digging operation to the full length of the extended kelly.

3.9.7 Rotary table. The rotary table shall transfer the rotation from the power source to the kelly bar. The rotary table shall be furnished with a replaceable kelly bushing or rollers. The rotary table shall have not less than six rotary speeds forward and one or more reverse speeds. The maximum torque available at the kelly shall be not less than 175,000 inch pounds at 25 rpm of kelly bar. The highest rotary speed imparted to the kelly shall be not less than 120 rpm.

3.9.8 Power feed and retracting mechanism. The power feed and retracting mechanism shall provide pressure to the kelly to increase or decrease the pressure on the auger bit. The power feed shall impart a maximum travel speed to the kelly of not less than 165 feet per minute in both up and down directions. Means shall be provided for applying not less than 30,000 pounds down pressure along the entire travel of the kelly without regard to the position of the kelly.

3.9.9 Kelly gage. An instrument shall be furnished to determine the position of the kelly from vertical to 45 degrees in increments of not more than 5 degrees and shall be visible to the operator when seated in the operator's seat.

3.9.10 Operator's seat. The operator's seat dimensions and ranges of adjustment shall be in accordance with SAE J899. Removable, foam-rubber-padded, waterproof-covered, back and bottom cushions shall be furnished.

3.9.11 Controls. Hand- and foot-operated controls shall be located in accordance with SAE J898, to enable the operator to perform all the operations including leveling the auger, positioning the kelly, rotating the turntable, sliding the platform, digging the hole, and setting casing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

3.9.12 Emergency starting and charging receptacle and cable. Slave receptacles conforming to MS75058 shall be provided to facilitate electrical connections between both the carrier and rotating superstructure batteries and an external electrical power source for emergency starting of the engines and charging of the batteries. Receptacles shall be accessible to the slave plugs specified below. Unless otherwise specified (see 6.2), a 30-foot-long cable conforming to part No. 7728530 of Drawing 7056674 shall be furnished to connect the slave receptacle on the rotating superstructure and the slave receptacle on the carrier to an external source or to each other. The cable shall be equipped at each end with a slave plug assembly conforming to MS75057.

3.10 Carrier. The carrier shall be a heavy-framed, 4-axle-supported, rubber-tired, heavy-duty, self-propelled vehicle upon which is mounted the rotating superstructure. The rotating superstructure shall be positioned in a fixed location on the carrier. Safety tread steel plate not less than 0.125 inch in thickness shall completely cover all openings between the carrier longitudinal frame members. This safety-tread plate shall be fastened to the frame members by bolts.

3.10.1 Wheel drive. The wheel drive shall be powered from the carrier engine through gear-driven axles. The drive shall be 8 by 4; four axles, two front (tandem) and two rear axles (tandem) driven.

3.10.2 Carrier exhaust system. The exhaust system shall be routed vertically. The stack shall terminate as a truck-type curved stack pipe with not less than a 14-1/2-inch radius curve undercut to protect the exhaust system from the weather. The stack shall be made of aluminized steel tubing. An expanded or pierced metal guard shall protect personnel from burns. The exhaust stack shall be braced and clamped to prevent damage by vibration and shall be equipped with a removable clamp and upper exhaust pipe with flanges held by corrosion-resistant steel bolts, washers, and nuts to facilitate reducing the stack height to below the upper half of the cab. The muffler shall not be located in the removable portion of the exhaust stack.

3.10.3 Engine clutch. The carrier shall be furnished with a heavy-duty, double-disk, truck-type clutch. The clutch shall be rated by its manufacturer at not less than 160 percent of the rated engine torque and shall transmit the full engine torque smoothly without slippage, chatter, or fierce engagement.

3.10.4 Transmission. The transmission for the carrier shall consist of a main transmission and an auxiliary transmission. The main transmission

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

shall provide not less than four forward speeds and not less than one reverse speed. The auxiliary transmission shall provide not less than three speeds.

3.10.5 Axles. All driving axles shall be either double reduction or planetary reduction and shall be full floating.

3.10.5.1 Suspension. Front spring and walking beam solid rear suspension shall be furnished.

3.10.6 Steering. The carrier shall be equipped with an integral, hydraulic, power-steering system conforming to the following requirements:

(a) The pump, reservoir, and filter shall be as recommended by the power-steering-gear manufacturer. Each hydraulic reservoir shall be equipped with a dipstick or sight gage to determine the level of fluid. A drain shall be located for complete drainage of the fluid into a container upon removal of the drain plug.
(b) The operating fluid pressure range shall be from 900 psi to 1,500 psi, shall operate with Military hydraulic fluid as specified herein, and shall provide ample fluid flow for the performance specified.
(c) The steering wheel shall be selected by the supplier from 18-, 20-, or 22-inch-diameter wheels.
(d) The power-steering control valve shall be located between the steering arm on the axle and the pitman arm. There shall be a cylinder on each of the tandem front axles.

3.10.7 Tires, rims, and wheels. Tires shall conform to MIL-T-12459 and shall be in accordance with MS35388-21 size 11.00 by 20. Tubes shall conform to ZZ-I-550, group II, and MS35392-15. The rim size shall be 20 by 7.5. Wheels shall be 20 inch, cast, five spoke. A spare tire, tube, and wheel (including spare-tire carrier) shall be furnished with each carrier and shall be mounted in an accessible location. The carrier shall have dual wheels on both rear axles. Under normal highway travel conditions, the load on each tire shall not be greater than 5,340 pounds. Tire pressures under all operating conditions shall be 70 pounds. The tires furnished shall have been manufactured not more than 6 months prior to installation on the carrier.

3.10.8 Fenders. Wheel housings and fenders or other equivalent protection shall be provided for all wheels to preclude throwing of debris.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

The rear fenders shall be constructed of sheet steel not less than 0.1072 inch in thickness and where used as walkway shall have a raised floor-tread pattern.

3.10.9 Towing attachments. Two towing eyes, shackles, or hooks shall be mounted on the front of the carrier. When the towing attachments are mounted underneath the chassis, they shall be of the eye type and shall be not less than 3 inches in inside diameter. Each towing attachment on the front shall withstand a pull in the longitudinal direction equal to the maximum GVW of the auger. The towing attachments shall be accessible for attaching a tow bar, chain, or cable.

3.10.10 Service airbrake system. The carrier shall be equipped with a waterproof, straight airbrake system that shall comply with the requirements of the ICC Motor Carrier Safety Regulations, and all wheels shall be provided with service brakes.

3.10.10.1 Alcohol evaporator. An alcohol evaporator shall be installed in the airbrake system line ahead of the compressor. The evaporator shall function to mist alcohol into the compressed-air system to prevent condensate freezing. The refill opening shall be accessible for replenishing the alcohol from a 1-gallon jar.

3.10.11 Emergency-parking brake system. An emergency-parking brake system shall be provided and shall include an isolated reserve air tank. The system shall perform as an emergency brake conforming to the California Motor Vehicle Code and shall also perform as a parking brake conforming to ICC Motor Carrier Safety Regulations. The operation of the emergency-parking brake system, due to a service brake failure and when manually applied, shall safely stop the auger. The emergency-parking system shall provide not less than two times the number of applications required in the California Motor Vehicle Code, Section 26508, under all conditions specified herein. When the air pressure is below the minimum operating pressure, the system shall prevent the operator in the seat from releasing the emergency-parking brakes. Manual or automatic application of the emergency-parking brake systems shall stop the auger on lever concrete from 20 mph in not more than 100 feet. The emergency-parking brake system shall hold the auger on a 40 percent grade. Loss of any diaphragm or air line shall result in not more than 50 percent reduction in the maximum braking effort.

3.10.12 Carrier electrical system. The carrier shall be equipped with a 24-volt vehicular electrical system.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

3.10.13 Lighting. The auger shall be furnished with service and blackout lighting. The service lighting, including identification, sidemarker, and clearance lights, shall conform to the requirements of the ICC Motor Carrier Safety Regulations. In addition, one rotating warning light conforming to MS51317-1 shall be furnished. The light shall be mounted in such a manner as to insure visibility from above and all sides and shall prohibit the entry of snow or rain. Color of the dome shall be red, yellow, or blue as specified (see 6.2).

3.10.14 Cab. The cab shall be of the tandem type with a seat for one passenger behind the driver. The outside width of the cab shall be not less than 32 inches. The cab shall be offset to the left side of the chassis. The cab shall be constructed of sheet steel not less than 0.090 inch thick. The cab shall have two doors. A metal visor attached above the top of the windshield or a visor formed by extending the cab roof beyond the top of the windshield shall be furnished. Adjustable side windows with side ventilation shall be furnished. Each control, switch, gage, and indicator light shall be labeled using plates as specified in 3.21 to indicate function and, where necessary, to indicate operation. An adjustable west-coast-type, outside, rearview mirror having an overall height of not less than 16 inches and an overall width of not less than 6 inches shall be placed on the driver's door of the carrier cab. The reflective surface shall be not less than 88 square inches. The mirror shall be braced both top and bottom to prevent blurred vision because of vibration at any highway speed. A second, smaller, rearview mirror shall be placed to permit the driver to see the off-road side of the auger. The floor shall be covered with a removable neoprene floor mat. The windshield glass shall be laminated safety plate glass conforming to MIL-G-3787, class I, type A. The remainder of the cab glass shall be 1/4-inch, tempered, safety plate glass. An adjustable, weather resistant, safety seat belt with a noncorrosive metal-to-metal, quick-release buckle shall be furnished for each seat and shall meet all requirements of SAE J4. Anchorage shall be in accordance with SAE J787 for "Seat Belts Attached to the Seat Frame."

3.10.14.1 Heater and defroster. A fresh-air-type heater with defroster shall be furnished. The heater and defroster shall conform to all applicable requirements of the ICC Motor Carrier Safety Regulations.

3.10.15 Derrick rack. A rack located at the front of the carrier shall be provided for securing the derrick when in a travel position. The rack shall rigidly secure the derrick from swinging and striking the carrier cab. A wood filler strip shall be placed on top of the rack to prevent damage to the derrick during periods when the derrick may be rested on the rack for maintenance. The rack shall be reducible to a

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

height not greater than the height of the cab by disassembly using bolts, star-type lockwashers, and captive nuts welded to the framework. A support shall be provided for the front of the platform during transport.

3.10.16 Outriggers. The carrier shall have outriggers consisting of hydraulically operated sliding beams housed in a suitable metal box attached at right angles to the frame of the carrier. The outriggers shall be located fore and aft of the rear tandem wheels and on each side of the carrier. The outriggers shall be complete with not less than four hydraulic jacks and four jack pads. Each jack pad shall have not less than 100 square inches of area. With the auger on level ground the jacks shall be long enough to lift the rear tandem tires free of the ground a distance of not less than 4 inches without the use of blocks. Leveling jacks shall be individually hydraulically operated.

3.10.17 Undercoating. The wheel wells, fenders, and sheet metal exposed to road splash shall be coated with commercial sandless undercoating in accordance with MIL-STD-1223.

3.10.18 Pockets. Two or more pockets shall be furnished on the sides of the carrier for transporting the 36-inch auger and spinner specified in 3.15.

3.10.19 Chock blocks. Two wheel chocks conforming to Drawing 8343584, with chains attached to the frame, shall be provided. The chain length shall permit chocks to be placed before and behind auger tires. Chock block cradles conforming to Drawing 8343583 shall be provided for securing the chocks while in transit.

3.11 Illumination. The auger shall be provided with a 24-volt lighting system to permit daylight performance to be maintained during night operation. Two pair of floodlights shall be furnished. Lamp housings shall conform to MIL-L-13071 and the floodlamps shall conform to MS17165-4578. Each pair of lamps shall be controlled by a panel-mounted toggle switch.

3.12 Pump. A 2-inch integral, self-priming, centrifugal pump driven by a gasoline engine with carrying frame or handles shall be furnished. The pump shall deliver not less than 50 gpm at 80-foot head with a 10-foot static suction lift. The pump shall prime and deliver full capacity in not more than 1 minute at a static suction lift equivalent to 10 feet at standard conditions. The material for castings shall be cast iron. A mechanical seal shall be furnished. The pump shall weigh not more than 100 pounds. Head capacity and priming performance shall be based on standard conditions defined as: a barometric pressure of 29.92 inches

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

of mercury; water as 68°F. having a specific weight of 62.3 pounds per cubic foot. Suction and discharge pipe and fittings shall be 2-inch nominal size. Couplings, 20 feet of suction hose, and 30 feet of discharge hose shall be furnished. The pump shall be securely mounted for transport on the carrier.

3.13 Power units.

3.13.1 Diesel engines. The diesel engines shall be of the naturally aspirated type. The engines and all accessories shall conform to MIL-E-11276, except as specified herein.

3.13.1.1 Power and speed rating. The power and speed rating of each engine shall be such that operation of the auger under any of the conditions specified herein shall not require horsepower in excess of the intermittent brake horsepower of the engine for the applicable speed as established by the engine qualification tests. The engine speed shall be controlled by a throttle at speeds from the minimum design speed to the maximum design speed of the unit being driven as recommended by the carrier or auger manufacturer. Prior to furnishing the engines for installation in the preproduction model of the auger, each engine complete with all accessories shall undergo test to establish curves for brake horsepower, torque, and fuel consumption at all speed in the operating range from the maximum to the minimum speed of the auger as recommended by the carrier or auger manufacturer. Following the bhp test, each engine on the preproduction model auger shall be set or adjusted to deliver not more than the intermittent bhp at governed speed. Accessories furnished with each engine shall include but shall not be limited to: air induction system; complete cooling system, including radiator and fan; electrical system (except batteries); fuel system (except fuel tank); exhaust system; and governing system. The fuel and governing system shall be set as they will be furnished on the preproduction model. All data (including curves) shall be furnished to the contracting officer. As determined by the maximum brake horsepower curve established, the maximum engine torque at rated governed speed shall not exceed 90 percent of the peak engine torque available at a lower speed. The governed speed of each engine shall not exceed the highest intermittent duty speed at which the engine was qualified. During the conduct of the maximum brake horsepower test, smoke samples taken with a Robert Bosch EFAW 65 sampling pump and analyzed on a Robert Bosch EFAW 68 smoke meter, shall not exceed a reading of 4.5 at any point on the horsepower curve. After the successful completion of the maximum brake horsepower test on each engine and subsequent adjustment and changes to limit the power at governed speed to the qualified intermittent bhp rating of the engine, the fuel

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

injection pump and components, injectors, and governor shall be sealed in the presence of a Government representative of the contracting officer. The engines shall then be installed on the preproduction model of the auger. After successful completion of all preproduction model tests, each engine furnished with each auger shall be set and adjusted to the original conditions at which it performed the brake horsepower test as specified in MIL-E-11278 (test method 204.0). All subsequently delivered engines shall develop at least 92 percent of the maximum brake horsepower value at which it qualified at governed speed.

3.13.1.2 Engine accessories. The following accessories shall be furnished with each engine and shall be in accordance with MIL-E-11276 except as specified herein:

(a) A fuel tank with sufficient capacity for 10 hours of operation at rated capacity in accordance with MIL-E-11276. The tank shall be furnished with a gasket, filler neck, and filler neck cap in accordance with MS35643, MS35644, and MS35645 respectively.
(b) A battery-charging alternator rated at 60 amperes.
(c) Instrument panel with all instruments as specified in MIL-E-11276, except that a tachometer shall not be provided.
(d) All control devices as specified in MIL-E-11276, of the warning-light type, except for the overspeed control device which shall be of the engine-shutoff type.

3.13.1.2.1 Air cleaner. The air cleaner shall conform to MS39247. The filter service restriction indicator shall be furnished in accordance with MS53063. The maximum signaling point of the restriction indicator shall be set at 25 inches of water.

3.13.1.2.2 Engine housing. Each engine shall be provided with a housing in accordance with MIL-E-11276.

3.14 Storage batteries. Batteries conforming to MIL-B-11188 and to MS35000 shall be furnished. The batteries shall be of a size and number to provide sufficient capacity to meet the electrical requirements of the auger. The batteries shall be charged and dry. One filling of electrolyte of the required specific gravity shall be shipped with each battery.

3.14.1 Battery box. A weatherproof box made of steel not less than 0.071 inch thick shall be provided for each set of batteries. Vents shall be provided near the top of the box and drains shall be provided in the bottom. The box shall be equipped with built-in restraints constructed

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

so that pressure will be applied to the outer battery case only. When the batteries are installed in the box and with all electrical connections completed and when the battery box lid is in the closed position, there shall be no uninsulated electrical conductor within 1 inch of any point within the battery box at which an electrical potential exists. The box shall be located so that the batteries will be accessible for routine maintenance, removal, and replacement. The battery electrolyte level shall be visible when the battery filler caps are removed. The batteries shall be accessible for servicing with battery-servicing aids such as a hydrometer and a syringe. Grommets shall be provided to protect the battery lead cables. All interior surfaces of the box shall be treated with acid-resistant paint.

3.15 Accessories. Unless otherwise specified (see 6.2), the following accessories shall be furnished with each auger:

No.	Accessories	Quantity
1.	Auger bits, all-purpose type, minimum length 4-1/2 feet, with hardfaced tungsten-carbide teeth (Williams 201 Jiffy type or equal) and stinger (Williams HF type or equal), Williams type HC or equal.	
	(a) Size 20-inch	1 ea
	(b) Size 24-inch	1 ea
	(c) Size 30-inch with adjustable reamer blades, drilled for 1- and 2- inch extensions on the radius	1 ea
	(d) Size 36-inch	1 ea
2.	Bucket, bailing, 24-inch dia, 4 to 5 feet long.	1 ea
3.	Casing, welded construction, 1/4-inch wall thickness, 30-inch inside dia, 30 feet long, 1/4 x 6 inch reinforcing ring at one end with spinner and clevis holes.	180 feet
4.	Sling, 2 legs, with 3-inch-inside-diameter ring and clevis on each leg, 4 feet minimum overall length.	2 ea
5.	Spinner, casing, universal, 24- to 36-inch.	1 ea
6.	Stingers, hardfaced tungsten-carbide, (Williams HF type or equal).	3 ea
7.	Teeth, hardfaced tungsten-carbide (Williams 201 Jiffy type or equal).	100 ea

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

3.16 Lubrication. All surfaces requiring lubrication shall be provided with accessible lubrication fittings. A lubrication fitting shall be located at each area where two moving metal surfaces are in contact and under pressure. The movement shall be the result of manual operation of controls, gravity, or power-train operation.

3.16.1 Lubricants. The auger shall operate as specified herein when lubricated with Military lubricants (see 6.3).

3.16.2 Lubrication fittings. Lubrication fittings shall conform to MS15003. Fittings shall be located in a protected position and shall be accessible to a grease gun conforming to MIL-G-3859, equipped with a hydraulic coupler conforming to MS24207 and a 10-inch flexible extension. Accessibility to fittings shall be provided without the removal or adjustment of accessories or parts. Engine-housing side panels and plates equipped with hand-operable, quick-disconnect fasteners may be removed to provide accessibility to lubrication fittings.

3.16.3 Pressure-release device. A pressure-release device shall be provided where the use of pressure-lubricating equipment will damage grease seals or other parts.

3.16.4 Enclosures with integral reservoir of lubricant. Enclosures such as gear cases and transmission housings that contain a reservoir of lubricants for the lubrication of the parts enclosed shall be equipped with dipsticks, check plugs not less than 1/2-inch pipe size, or sight gages to determine the level of the lubricant. Each enclosure shall be equipped with a means for filling the enclosure with a lubricant and for draining. The fill pipe shall be not less than 1 inch in diameter. The drain shall be fitted with a drain plug conforming to MS35844. The drain shall be located so that removal of the plug will result in complete drainage of the lubricant from the enclosure. Drainage shall be to the ground when the auger is in its normal position. Integral tubes or troughs may be used to convey the lubricant from the drain to the ground. The drain plugs, the filling means, and the lubricant-level dipsticks or holes shall be accessible without disturbance of accessories or parts.

3.16.5 Lubrication service.

3.16.5.1 Grease lubrication. Bearing lubrication, including sealed bearings, shall be with greases as follows:

(a) MIL-G-23827 - For instruments, all sealed bearings, and other bearings where operating temperatures do not exceed 250°F.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

(b) MIL-G-10924 - For other bearings where operating temperatures do not exceed 175°F.

The auger shall be run-in (broken-in) and delivered with these greases. The bearings shall be cleaned before lubrication because Military greases are not compatible with other greases. Each component shall be tagged in a conspicuous place to indicate which Military grease has been used.

3.16.5.2 Oil lubrication. Unless otherwise preserved for packaging (see 5.1), all components shall be filled to the operating level with Military oils designated for use at 32°F. temperature. Each lubricated component shall be tagged in a conspicuous place to indicate the temperature ranges and grades of oils used.

3.17 Fire extinguishers. The supplier shall furnish a 5-pound carbon dioxide fire extinguisher. The extinguisher shall be mounted in the carrier cab in a position accessible to the operator.

3.18 Lifting attachments. The auger shall be equipped with lifting attachments to lift the complete auger. In addition, each disassembled component as specified in 3.27 shall be equipped with lifting attachments. The attachments shall permit the equipment to be lifted in its normal traveling position. The attachments shall be located so that clearance is maintained between the slings and all exterior parts of the equipment being lifted. Spreader bars are permitted. Each attachment shall be of sufficient strength to carry not less than 2-1/2 times the normal load imposed on the attachment. Attachments for multiple slings shall be designed so that the attached slings will converge not more than 19 feet above the lowest extremity of the load when such limitation is possible. Attachments shall be positioned so that the lifting strain will be in line with the longitudinal axis of the eye of the attachment. The inside diameter of the eye shall be not less than 3 inches. Attachments shall be attached to members of sufficient strength to withstand stresses in the amount and direction of pull specified for the attachment. Where required, reinforcements shall be used to meet the requirements specified herein. Lifting attachments may also be used as tiedown devices when such attachments meet the requirements for tiedown devices as specified in 3.19.

3.19 Tiedown attachments. The complete auger and each disassembled component (see 3.27) shall be provided with integral attachments to permit tiedown to the floor or deck of the transportation medium. The auger tiedown attachments, structural members, and all components shall withstand without damage or permanent deformation the impact encountered when

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

tested as specified in 4.5.2.15. Tiedown attachments may also be used as lifting attachments when such attachments meet the requirements specified in 3.18.

3.20 Identification marking. The auger shall be identified in accordance with MIL-STD-130. Identification plates shall conform to MIL-P-514, type I, style 2. Transportation-data plates conforming to MIL-P-514, type V, shall indicate location and capacity of lifting and tiedown attachments. Material for identification and transportation plates shall conform to GG-P-455, grade A, class 1.

3.21 Instruction plates. Each lever, switch, and other type control shall be provided with plates conforming to MIL-P-514, type IX, material conforming to GG-P-455, grade A, class 1 to identify its function and to include instructions, warnings, and cautions where damage to the auger or danger to personnel could result due to incorrect settings during starting, operation, or shutdown of the auger.

3.22 Treatment and painting. The portions of the auger normally painted shall be cleaned, treated, and painted in accordance with MIL-T-704, type A.

3.23 Technical publications to accompany auger. Such technical publications as are specified shall be furnished (see 6.2).

3.24 Repair parts and maintenance tools. Such repair parts and maintenance tools as are specified shall be furnished (see 6.2).

3.25 Items to be furnished with the auger. No shipment of augers shall be made unless repair parts, maintenance tools, and accessories are included with the shipment or unless approval for shipment of the augers without such items has been received from the contracting officer.

3.26 Toolbox. A toolbox shall be furnished and mounted on the auger. The toolbox shall have not less than 2 cubic feet of storage space. Material used shall be steel not less than 0.071 inch thick. Provisions shall be incorporated for locking the toolbox. Drainage shall be provided as mounted.

3.27 Rail transportability. Each auger shall disassemble into components of a size that, when loaded on a flat car, will meet the requirements of the Association of American Railroads Rules Governing the Loading of Commodities on Open Top Cars and Berne clearance dimensions as shown in figure 1. The length of the rotating superstructure may exceed the length shown in figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

3.28 Workmanship. The auger shall be free from defects such as incomplete welds, rust, cracks, and other defects that could impair the operation or serviceability of the auger.

3.29 Fabrication. Metal used in the fabrication of the auger shall be free from kinks and sharp bends. The straightening of material shall be done by methods that will not cause injury to the metal. Corners shall be square and true. Flame cutting may be employed instead of sawing or shearing. All bends of a major character shall be made with metal dies or fixtures to insure uniformity of size and shape. Burned surfaces of flame-cut steel shall be ground or machined to remove ash and cooling checks. All burrs and rough edges shall be removed. Precautions shall be taken to avoid overheating, and heated metals shall be allowed to cool slowly.

3.29.1 Bolted connections. Bolt holes shall be accurately punched or drilled and shall have the burrs removed. Washers, lockwashers, and elastic stop nuts shall be provided and all bolts, nuts, and screws shall be tight. Bolts and screws shall not extend more than 1/2 inch beyond the nut.

3.29.2 Riveted connections. Rivet holes shall be accurately punched or drilled and shall have the burrs removed. Rivets shall completely fill the holes. Upset rivet heads shall be full, neatly made, concentric with the rivet holes and in full contact with the surface of the member.

3.29.3 Welding. The surfaces of parts to be welded shall be free from rust, scale, paint, grease, and other foreign matter. Welds shall transmit stress without permanent deformation or failure when the parts connected by the welds are subjected to proof and service loading.

3.29.4 Machine work. Tolerance and gages for metal fits shall conform to the limitations specified herein and otherwise to the standards of accepted commercial practice.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

4.1.1 Component and material inspection. The supplier is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards.

4.2 Classification of inspection. Inspection shall be classified as follows:

(a) Preproduction inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).
(c) Inspection of preparation for delivery (see 4.6).

4.3 Preproduction inspection.

4.3.1 Examination. The auger shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.3.2 Tests. The auger shall be tested as specified in 4.5.2 through 4.5.2.17. Failure of any test shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Examination. Each auger shall be examined for the defects specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.4.2 Tests. Each auger shall be tested as specified in 4.5.2.18. Failure of the test shall be cause for rejection.

4.5 Inspection procedure. Prior to examination or tests, the augers shall be completely lubricated with Military greases. Oils shall be those designated for use in the ambient temperatures at which the tests are being performed.

4.5.1 Examination. The auger shall be examined for the following defects:

101. Material not as specified.
102. Auger does not conform to ICC regulations except as specified.
103. Safety devices or guards missing.
104. Assemblies not accessible as specified.
105. Subassemblies not matchmarked.
106. Alining devices not furnished.
107. Connections, plugs, and valves not as specified.
108. Draining provisions not as specified.
109. Weight and dimensions not as specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

110. Rotating superstructure not as specified.
111. Turntable does not rotate 320 degrees.
112. Swing lock not furnished.
113. Swing brake not provided or not as specified.
114. Mounting platform will not support the mounted machinery and operator.
115. Deck plate not as specified.
116. The platform does not extend and retract 4 feet.
117. Service winch not as specified.
118. Service line not as specified.
119. Crown block not as specified.
120. Sheaves not as specified.
121. Eye-type anchor not furnished.
122. Derrick not as specified.
123. Kelly not as specified.
124. Rotary table not as specified.
125. Power feed and retracting mechanism not as specified.
126. Kelly gage not as specified.
127. Operator's seat not as specified.
128. Controls not located as specified.
129. Emergency starting and charging receptacle and cable not furnished or not as specified.
130. Carrier not of the type specified.
131. Safety tread plate not of the thickness or not attached as specified.
132. Wheel drive not as specified.
133. Carrier exhaust system not as specified.
134. Engine clutch not as specified.
135. Transmission not as specified.
136. Axles or suspension of other type than specified.
137. Steering not as specified.
138. Tires, rims, and wheels not as specified.
139. Spare tire, tube, wheel, and carrier not furnished.
140. Rear axles not equipped with dual wheels.
141. Tire pressures not at 70 pounds.
142. Age of tires longer than specified.
143. Wheel housing and fenders not furnished or not as specified.
144. Towing attachments not as specified.
145. Service airbrake system does not comply with ICC Motor Carrier Safety Regulations or does not have brakes on all wheels or alcohol evaporator not as specified.
146. Emergency-parking brake system not as specified.
147. Auger electrical system other than 24 volt.
148. Lighting not as specified or does not conform to ICC Motor Carrier Safety Regulations.
149. Cab not as specified.
150. Rearview mirrors not as specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

151. Heater and defroster not as specified.
152. Pump, coupling, and hose not furnished or other than as specified.
153. Derrick rack not as specified.
154. Outriggers not as specified.
155. Undercoating not as specified.
156. Pockets not sufficient size or not furnished.
157. Chock blocks not as specified.
158. Illumination other than 24-volt lighting system, less than two pair of floodlights furnished, or lamp housing not as specified.
159. Storage batteries and battery box not as specified.
160. Accessories not furnished as specified.
161. Lubrication not as specified.
162. Fire extinguisher not furnished or not mounted as specified.
163. Identification not as specified.
164. Instruction plates not as specified.
165. Treatment and painting not as specified.
166. Technical publications not furnished.
167. Repair parts and maintenance tools not furnished.
168. Toolbox not as specified.
169. Workmanship not as specified.

4.5.2 Tests.

4.5.2.1 Engine. The engine shall be operated at governed speed during all preproduction testing. Governed speed is that speed at which the maximum available torque does not exceed 90 percent of the maximum engine torque developed at a lower speed. Torque and bhp shall be determined as specified in 4.5.2.1.1.

4.5.2.1.1 Power and speed. The engine with accessories as specified in 3.13.1.1 shall be tested with the fuel and governing systems set as they will be furnished on the preproduction model. Test the engine as specified in MIL-E-11278, test method series 200.0, except as specified herein. Test data will be corrected for ambient conditions as specified in MIL-E-11278. The final inspection (test method 206.0) shall not be performed. Couple the engine directly to a dynamometer and determine the data and curves as specified in 3.13.1.1 for at least six speeds in the range of throttle control. Take smoke samples with a Robert Bosch Model EFAW 65 sampling pump and analyze the samples on a Robert Bosch Model EFAW 68 smoke meter. Any of the following shall constitute failure of this test:

(a) Deflections greater than 4.5 on smoke meter.
(b) Inability of the engine to produce 92 percent of the maximum qualified bhp at the applicable governed speed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

(c) The available torque at governed speed exceeds 90 percent of the torque available at a lower speed.
(d) Inability to hold speed setting at all points within throttle range.
(e) Governed speed of the engine in excess of highest qualified intermittent speed.
(f) Engine accessories not as specified in 3.13.1.1.
(g) Engine coolant temperature in excess of 210°F. measured at radiator top tank.
(h) Engine lubricating oil temperature in excess of 230°F. measured at the oil gallery.

At the conclusion of the performance test (test method 204.0) the engine fuel pump, injectors, and governor shall be adjusted or modified to preclude the engine from producing horsepower in excess of the intermittent bhp rating of the engine, at the determined governed speed, under wide-open- throttle conditions. Modifications and adjustments or settings changed will be subject to the approval of a Government representative. Upon completion of these changes, the engine will be subjected to the rated load test (test method 205.0) and subsequently sealed by the Government representative.

4.5.2.2 Vertical hole digging. This test shall be conducted at an actual or simulated altitude of 5,000 feet (see 3.1.1). If the option is taken to simulate altitude conditions for test purposes, such simulation shall be accomplished in the following manner. In the vicinity of the engine, mount a container of sufficient capacity and inlet orifice size to assure a steady air pressure to the engine equal to 24.89 inches of mercury for 5,000 feet. Connect the outlet of the container to the air cleaner so that air is inducted into the engine in the normal manner through the air cleaner filter. Determine the intake air pressure with a U-tube manometer tapped into the container at a point where static air pressure is maintained in the container. The intake and exhaust systems shall be complete and unaltered, except that the carburetor may be adjusted for optimum performance. Set up the auger at the digging site. Dig three holes using a 36-inch bit to a minimum depth of 60 feet in the material specified in 3.1.1.1.1 and perform the following operations:

(a) Set 60 feet of 30-inch-diameter casing in one of the holes (sections of casing shall be 30 feet long).
(b) Dig one hole at night using the lights mounted on the auger as the only illumination.
(c) Maintain a digging log and indicate the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

(1) Formation encountered and at what depth.
(2) Digging time.
(3) Shutdown and reasons (including service and maintenance).

Submit to the contracting officer a certified reproducible copy of the log. Inability to complete the test, reduced digging rate at night, digging log incomplete, any permanent deformation or breakage to components of the auger (bit teeth excluded), or not disposing of the spoil as specified in 3.1.1 (c) shall constitute failure of this test.

4.5.2.3 Angular hole digging. This test shall be conducted by digging in materials as specified in 3.1.1.1. Using the 36-inch auger bit, dig one hole 30 degrees from vertical and a second hole 45 degrees from vertical to the fully extended length of the telescopic kelly. Accuracy of angle gage shall be determined by comparing to actual kelly bar angle. Inability to complete the test, inability of the operator to read the angle gage and determine within 2 degree tolerance the prescribed angle, or any permanent deformation or breakage to components of the auger (bit teeth excluded) shall constitute failure of this test.

4.5.2.4 Penetration rate. This test shall be conducted with the 36-inch auger resting on the bottom of a hole not less than 3 feet deep. The kelly bar shall be marked to provide a point to measure kelly bar travel. A record of elaspsed time shall be taken from the moment the operator initially engages the kelly bar down-travel control to the moment of final release. The elapsed time of the test shall not be less than 1 minute. Measure the travel of the kelly bar. Calculate the penetration rate in both materials as specified in 3.1.1.1.2. A penetration rate of less than 2 fpm in the soil specified in 3.1.1.1.2 (a) or a penetration rate less than 1 fpm in the rock specified in 3.1.1.1.2 (b) shall constitute failure of this test.

4.5.2.5 Accessory handling. This test shall be performed by two men. A 36-inch auger bit shall be stored for transport in a storage pocket on the auger. Using the auger service hoist, pick up the 36-inch auger bit from the storage pocket and deposit it on the ground within 5 feet of the carrier. Insert the kelly bar stub in the bit socket and insert locking pin. Inability to complete the test or requiring additional personnel or equipment shall constitute failure of this test.

4.5.2.6 Gradeability and travel speed. This test will be conducted on a hard surface roadway with uniform grade conforming to the grade specified in 3.1.1 (g). From a standing start, travel the auger up the 40 percent grade for a distance of not less than 30 feet. Travel the auger at 35 mph up the 1 percent grade for not less than 1,000 feet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

Inability to traverse the 40 percent grade for a distance of 30 feet or to maintain a speed of at least 35 mph over the 1 percent grade for a distance of 1,000 feet shall constitute failure of this test.

4.5.2.7 Hoist drumline pull and speed test. Apply a 16,000-pound load to the service hoist line and have not more than two wraps of rope around the hoist drum. Engage the hoist at low speed and lift the load. Calculate the bare drum line speed. Repeat the procedure applying an 8,000 pound load and employing the high speed of the hoist. Inability to lift the loads, bare drum line speeds less than as specified in 3.9.3, or permanent deformation or breakage to any component of the auger shall constitute failure of this test.

4.5.2.8 Kelly bar torque. Measure the maximum torque available at the kelly. Inability to develop 175,000 inch-pounds at 25 rpm shall constitute failure of this test.

4.5.2.9 Kelly bar speeds. Measure the kelly bar maximum travel speed in a downward direction. Repeat in upward direction. Inability of the kelly bar to travel a maximum speed of 165 feet per minute in both directions shall constitute failure of this test.

4.5.2.10 Kelly bar down pressure. Measure the down pressure of the kelly when the kelly is 1/3 extended, 2/3 extended and 7/8 extended. Inability to produce a minimum of 30,000 pounds down pressure at any of the three test points shall constitute failure of this test.

4.5.2.11 Tire loading. Measure the load on each wheel with all wheels resting on a common horizontal plane. Divide the weight in pounds for each wheel by the number of tires on the wheel. Tire loading of more than 5,340 pounds on any tire shall constitute failure of this test.

4.5.2.12 Emergency-parking brake system. Drive the auger forward over a dry level concrete surface with a grade not exceeding 1 percent. When the auger reaches a speed of not less than 20 mph, manually actuate the emergency-parking brake system. Measure and record the distance between the point of actuation and the point of stoppage. Drive the auger onto the test course and stop. Apply the emergency-parking brakes by exhausting service reservoir air to the point that the emergency system is automatically actuated. From this step on, no additional compressed air will be replenished in any reservoir. Without dismounting from the seat, release the emergency-parking brakes, move the auger under its own power forward, and reapply the emergency-parking brakes for twice the number of applications required in the California Motor Vehicle Code. Drive the auger up a 40 percent grade until all wheels

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

are on the grade. Make a panic stop using the service brakes. Set the emergency-parking brakes. Inability of the auger to meet the minimum requirements of California Motor Vehicle Code or the ICC Regulations or nonconformance to 3.10.11 shall constitute failure of this test.

4.5.2.13 Road test. Drive the auger, loaded with accessories, tools, and equipment necessary to dig a 36-inch hole, a distance of not less than 200 miles over secondary roads. Turn on all lights controlled by the carrier. During the travel over this 200 miles, shift the transmission both up and down through each transmission speed not less than 50 times and come to a complete stop after each shift cycle. A travel speed of not less than 10 mph shall be maintained throughout this test. Inability to complete the test, damage or malfunction to any component or part, leakage, or overheating of any part shall constitute failure of this test.

4.5.2.14 Lifting attachments. Lift the disassembled sections of the auger and determine the normal load on each attachment. Apply 2-1/2 times the normal load to each attachment in the direction in which a sling normally applies the lifting load. Repeat the procedure on the assembled auger. Weld failure or permanent deformation of the attachment or any part of the auger shall constitute failure of this test.

4.5.2.15 Tiedown attachments. Anchor each disassembled section of the auger to a flatcar using the tiedown attachments and no blocking, bracing, or cribbing. Hump the loaded flatcar at a speed of 7 mph against five boxcars with their airbrakes set. Repeat the humping with the opposite end of the section in the direction of the five cars. Repeat the procedure on each assembled auger. Weld failure or permanent deformation of the attachments or any part of the auger shall constitute failure of this test.

4.5.2.16 Pump. Correct all data to standard conditions as defined in 3.12. Suction pipe and fittings shall be 2-inch nominal size.

(a) Subject the pump to an internal hydrostatic pressure of 1-1/2 times shutoff head for not less than 1 minute.
(b) After initially filling the pump, operate the pump at static suction lifts equivalent to 10 feet.
(c) Operate the pump at continuous duty rpm and static suction lift equivalent to 10 feet; continue testing the pump in accordance with the Rating Standard and Test Code Standards for Centrifugal Pumps of the Hydraulic Institute for conformance to the head-capacity of 50 gpm at 80 feet total head.

Evidence of leakage from any part of the pump, cracks in the pump, any component or part, permanent deformation, inability of the pump to prime

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

and deliver full capacity in not more than 1 minute, inability of the pump to deliver water at 50 gpm with 80-foot head or greater shall constitute failure of this test.

4.5.2.17 Rail transport. Sectionalize the auger for rail transport and reassemble. Nonconformance to 3.27 shall constitute failure of this test.

4.5.2.18 Operation. Drive the auger a distance of not less than 10 miles. Shift the transmission both up and down through each transmission speed not less than five times, coming to a complete stop after each shift cycle. Set up the auger for hole digging operation. Dig 36-inch holes in earth to any desirable depths, operating for not less than 2 hours. All major components and all controls shall be operated to determine performance. Any malfunction, breakage, or permanent deformation shall constitute failure of this test.

4.6 Inspection of preparation for delivery.

4.6.1 Pilot-pack inspection.

4.6.1.1 Examination. Examine the pilot pack in accordance with 4.6.2.3. Presence of one or more defects shall be cause for rejection.

4.6.1.2 Test. Subject the pilot pack of crated components for level A to the test specified in 4.6.1.2.1. At the conclusion of the pilot-pack test, the pack shall be examined. Any shifting of contents, loosening or breaking of holddowns, ties, stays, blocking, or bracing, or any visible damage to the components shall constitute failure of the pilot-pack test and shall be cause for rejection.

4.6.1.2.1 Railroad-car impact. Subject the crated components to the railroad-car test as specified for guided-impact tests in MIL-STD-1186, appendix A. The car shall strike a string af five empty cars with brakes set and draft gear extended at a speed of between 10 and 11 miles per hour.

4.6.2 Quality conformance inspection of pack.

4.6.2.1 Unit of product. For the purpose of inspection, a completely processed auger, including related crated components, shall be considered a unit of product.

4.6.2.2 Sampling. Samples for examination shall be selected in accordance with MIL-STD-105, level S-1, AQL shall be 6.5 percent defective.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

4.6.2.3 Examination. Examination of internal preservation shall be made during process of packaging and packing. Samples selected in accordance with 4.6.2.2 shall be examined for the following defects:

170. Materials, methods, and containers not as specified for levels A and B. Each incorrect material, method, or container shall be considered one defect.
171. Cloth matchmarking tags not waterproofed as specified for level A.
172. Surfaces and components requiring a contact preservative in accordance with the referenced document not coated for levels A and B.
173. Keys removed not secured to the keyway of the primary component or shaft for levels A and B.
174. Exposed machined surfaces not coated and wrapped or covered, and secured with tape as specified for levels A and B.
175. Engine(s) and engine accessories not preserved in accordance with the referenced document.
176. Carrier components not preserved and packaged in accordance with the referenced document for levels A and B.
177. Emergency starting cable not coiled and secured and the openings not sealed as specified for levels A and B.
178. Clutches and brakes not preserved as specified for level A.
179. Kelly not preserved and external threads not protected as specified for levels A and B.
180. Hydraulic system not preserved as specified for levels A and B.
181. Exposed drive chains not preserved as specified for levels A and B.
182. Wire rope not coated, wound on drum, and secured to prevent unwinding for level A.
183. Foam rubber cushions from operator's seat not removed and preserved in accordance with the referenced document for level A.
184. Pump not preserved in accordance with the referenced document for levels A and B.
185. Floodlights, if removed, not preserved as specified for levels A and B.
186. Exposed ends of wiring, outlets, and plug openings not sealed with tape as specified for levels A and B.
187. Repair parts not preserved in accordance with the referenced document.
188. Maintenance tools not preserved and packaged in accordance with the referenced document for levels A and B.
189. Technical publications not preserved as specified.
190. Intermediate packaging not as specified for levels A and B.
191. Packing not as specified for level A.
192. Marking illegible, incorrect, or incomplete.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Pilot pack. The pilot pack is defined as a preproduction pack consisting of one completely processed auger and all related crated equipment which will be identical to the pack which the supplier will subsequently produce in fulfillment of the contract. A pilot pack shall be made and examined, and related crated equipment shall be subjected to the test specified to determine conformance to the preservation, packaging, packing, and marking requirements. Approval of the pilot pack shall not relieve the supplier of his obligation to preserve, package, pack, and mark the augers in accordance with this specification. Any changes or deviations of production packs from the pilot pack shall be subject to the approval of the contracting officer.

5.2 Preservation and packaging. Preservation and packaging shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Disassembly. Disassembly shall be confined to the removal of various assemblies and parts that are vulnerable to damage and loss and which would interfere with the rail transportability requirements specified in 3.27. The disassembly shall be in accordance with the recommendations of the supplier. Removed bolts, nuts, pins, and washers shall be replaced in one of the mating parts and secured to prevent their loss or intermediate packaged as specified in 5.2.1.25. Removed keys shall be secured to the keyway of the component or shaft.

5.2.1.2 Matchmarking. When necessary to facilitate reassembly, detached components shall have matchmarking information on cloth tags conforming to UU-T-81, type A, or on metal tags. The cloth tags shall be waterproofed in accordance with MIL-STD-129. The tags shall be securely attached to the components so as to prevent damage to the preservation or to the components.

5.2.1.3 Preservatives. Preservatives specified herein shall conform to the applicable specifications listed in and shall be applied in accordance with MIL-P-116.

5.2.1.4 Unprotected surfaces. Unpainted exterior metal surfaces of accessories and of items such as tie rods, adjusting rods, clevises, lubrication fittings, sprockets, drums, sheaves, bolts, nuts, pins, washers, and screws, or any other unpainted exterior metal surface not specified herein requiring the application of a contact preservative in accordance with MIL-P-116, shall be coated with type P-1 preservative.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

5.2.1.5 Machined surfaces. Exposed machined surfaces of parts shall be coated with type P-6 preservative and wrapped or covered with barrier material conforming to MIL-B-121, type I, grade A, class 2, secured in place with tape conforming to PPP-T-60, class 1.

5.2.1.6 Engines. The engines and engine accessories shall be preserved in accordance with MIL-E-10062, level A.

5.2.1.7 Carrier. Components of the carrier shall be preserved and packaged in accordance with the level A (mobile) requirements of MIL-STD-281.

5.2.1.8 Emergency starting cable. The cable, when furnished, shall be coiled and the coil shall be secured with cotton tape or twine. Openings into the slave plugs shall be sealed with tape conforming to PPP-T-60, class 1.

5.2.1.9 Clutches.

5.2.1.9.1 Disk type. With the cover plates removed and with the clutch engaged, all interior components of the clutch shall be sprayed with primer conforming to TT-P-664. Coating of nonmetallic surfaces shall be kept to a minimum. Clutch control mechanisms not enclosed shall be coated with type P-1 preservative. After spraying, spring-loaded-type clutches shall be blocked in a partially disengaged position to eliminate contact between the disk facings and pressure plates. Snap-over-center and toggle-in-type clutches shall be completely disengaged.

5.2.1.9.2 Band-type clutches and brakes. Clutch and brake drum facings and control mechanisms enclosed in the housing shall be coated with primer conforming to TT-P-664. Control mechanisms not enclosed shall be coated with type P-1 preservative. The clutch and brakes shall not be operated after application of preservatives.

5.2.1.10 Exposed gears. Exposed gears shall be coated with type P-1 preservative or with primer conforming to TT-P-664.

5.2.1.11 Derrick. Unpainted metal surfaces of the derrick shall be coated with type P-1 preservative.

5.2.1.12 Crown block. Unpainted surfaces of the crown block assembly including sheaves, anchor, guard, and traveling block shall be coated with type P-1 preservative.

5.2.1.13 Kelly. The interior surfaces of the kelly shall be coated with type P-10, grade 2 preservative. The exterior surfaces shall be

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

coated with type P-1 preservative. External threads shall be protected with metal thread protectors and openings shall be covered with barrier material conforming to MIL-B-121, type I, grade A, class 2. The barrier material shall be secured in place with tape conforming to PPP-T-60, class 1.

5.2.1.13.1 Kelly drive bushing assembly. The kelly drive bushing assembly shall be coated with type P-10, grade 2 preservative and wrapped with barrier material conforming to MIL-B-121, type I, grade A, class 2. The barrier material shall be secured in place with tape conforming to PPP-T-60, class 1.

5.2.1.14 Hydraulic system. The hydraulic fluid supply tank shall be filled with approved hydraulic fluid. The pistons shall be fully retracted into the cylinder and secured. Any exposed portions of the piston rods (ramshafts) shall be coated with type P-6 preservative and wrapped or covered with barrier material conforming to MIL-B-121, type I, grade A, class 2, extending the wrap approximately 2 inches on the ram cylinder. The wrap shall be secured in place with tape conforming to PPP-T-60, class 1. The hydraulic control valves shall be secured in the neutral position and preserved as specified for piston rods (ramshafts). Hose shall not be disconnected. Any other exterior metal surface of components or parts of the system requiring the application of a contact preservative shall be coated with type P-1 preservative.

5.2.1.15 Exposed drive chains. Exposed drive chains shall be coated with enough type P-3 preservative to assure penetration of the preservative to the inner surfaces of the rollers, pins, and bushings. After the excess preservative has drained, the chains shall be coated with type P-1 preservative. Sprockets shall be coated with type P-1 preservative.

5.2.1.16 Service winch and line. The wire rope shall be unwound from the winch drum and the wire rope and unpainted surfaces of the winch shall be coated with type P-1 preservative. The wire rope shall be rewound on the winch drum and secured to prevent unwinding.

5.2.1.17 Operator's seat. The foam rubber cushions shall be removed and preserved in accordance with MIL-P-116, method IC-5.

5.2.1.18 Pump. The pump shall be preserved in accordance with MIL-P-10603, level A.

5.2.1.18.1 Hose. Hose shall be coiled and the coils shall be secured with cotton tape or twine.

5.2.1.19 Lighting system. Floodlights, if removed, shall be preserved in accordance with MIL-P-116, method IC-5. Exposed ends of wiring, outlets, and plug openings shall be sealed with tape conforming to PPP-T-60, class 1.

5.2.1.20 Fire extinguisher. Unprotected exterior metal surfaces requiring the application of a contact preservative in accordance with

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

MIL-P-116 shall be coated with type P-1 preservative and secured in the mounting bracket in the cab.

5.2.1.21 Repair parts. The preservative application criteria and applicable method(s) of preservation of MIL-P-116 shall be used to preserve repair parts.

5.2.1.22 Maintenance tools. Maintenance tools shall be preserved and packaged in accordance with MIL-H-15424, level A. The tools shall be placed in the toolbox when sufficient space is available or intermediate packaged as specified in 5.2.1.25.

5.2.1.23 Technical publications. Technical publications shall be preserved together in accordance with MIL-P-116, method IC-1.

5.2.1.24 Miscellaneous components. Miscellaneous components not specifically identified herein requiring protection from corrosion or mechanical damage shall be preserved and packaged as specified for components of similar design and construction.

5.2.1.25 Intermediate packaging. Packaged and unpackaged components requiring the protection afforded by a wood box to accomplish the packing specified herein shall be packed in close-fitting boxes conforming to PPP-B-621, class 1, style optional, or PPP-B-601, domestic type, style optional. Strapping shall not be required. The contents shall be blocked, braced, and cushioned within the boxes in a manner to prevent free movement and damage to the contents in accordance with MIL-STD-1186.

5.2.2 Level B. The complete auger, components, and accessories shall be preserved and packaged as specified for level A, except items preserved by method IC-5 shall be preserved by method III using boxes conforming to PPP-B-636, class domestic, and with the following additional exceptions.

5.2.2.1 Matchmarking. Cloth matchmarking tags shall not be required to be waterproofed.

5.2.2.2 Carrier. Components of the carrier shall be preserved and packaged in accordance with the level B (mobile) requirements of MIL-STD-281.

5.2.2.3 Clutches and brakes. Coating of clutch and brake components with primer shall not be required.

5.2.2.4 Hydraulic system. Coating and wrapping of piston rods shall not be required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

5.2.2.5 Exposed drive chains. Exposed drive chains shall be preserved as specified for level A, except only type P-3 preservative shall be applied.

5.2.2.6 Winch line. Coating of wire rope shall not be required.

5.2.2.7 Fire extinguisher. Preservation of the fire extinguisher shall not be required.

5.2.3 Level C.

5.2.3.1 Engine(s). The engine(s), including the liquid cooling system, shall be preserved in accordance with MIL-E-10062, level C.

5.2.3.2 Repair parts, maintenance tools, and technical publications. Repair parts and technical publications shall be preserved and packaged as specified for level A. Maintenance tools shall be placed in the toolbox, when sufficient space is available, without preservation or packaging. Otherwise tools shall be intermediate packaged as specified in 5.2.1.25.

5.2.3.3 Other components. Preservation and packaging of other components of the auger not specifically mentioned in paragraphs 5.2.3.1 and 5.2.3.2 shall be limited to that protection deemed necessary by the supplier to provide protection against deterioration and damage from the supplier to the initial destination.

5.3 Packing. Packing shall be level A or C as specified (see 6.2).

5.3.1 Level A. The carrier, revolving power-unit superstructure, casings, derrick (if removed), and auger bits shall be prepared for delivery unboxed. When practical, the remainder of the packaged and unpackaged components shall be secured to the carrier or to the revolving power-unit superstructure in a protected location that will not interfere with lifting or mobility. The components shall be secured with zinc-coated strapping conforming to QQ-S-781 or QQ-S-790. Components impractical to secure to the carrier or the basic auger shall be packed in a crate conforming to MIL-C-3774, nailed assembly, skid-type base. Blocking, bracing, and anchoring of the components within the crate shall be in accordance with the appendix to the crate specification. All components comprising the complete auger shall be shipped at the same time.

5.3.2 Level C. The complete auger shall be prepared for shipment in a manner to assure carrier acceptance and safe delivery to destination at lowest rating. Containers shall comply with Uniform Freight Classification Rules, National Motor Freight Classification Rules or other carrier rules applicable to the mode of transportation.

5.4 Marking. Packages, shipping containers, and unboxed components of the auger shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The auger is intended for Military application and general construction use for digging holed in soil and soft rock.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of specification.
(b) When emergency cable is not required (see 3.9.12).
(c) Color of the dome required (see 3.10.13).
(d) Accessories required (see 3.15).
(e) Technical publications required (see 3.23).
(f) Repair parts and maintenance tools required (see 3.24).
(g) Level of preservation and packaging and level of packing required (see 5.2 and 5.3). Level B preservation and packaging is intended to provide economical but limited protection and should be specified only when it is determined the auger will be held in covered storage.

6.3 Lubricants. The contracting officer should furnish a list of Military lubricants applicable to the auger covered by this specification as contained in the Federal Supply Catalogue, Department of Defense Section, Identification List C9100-IL, for FSC Group 91.

6.4 The soil specified herein is of a designated as GW-GS on the Soil Classification Chart adopted by the Bureau of Reclamation and the Office, Chief of Engineers, January 1952 (see 3.1.1.1.2-(a)).

Custodian

Army - MO(ERDL)

Preparing Activity


Army - MO(ERDL)

Review Activity

Army - MO

Project No. 3820-A021

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

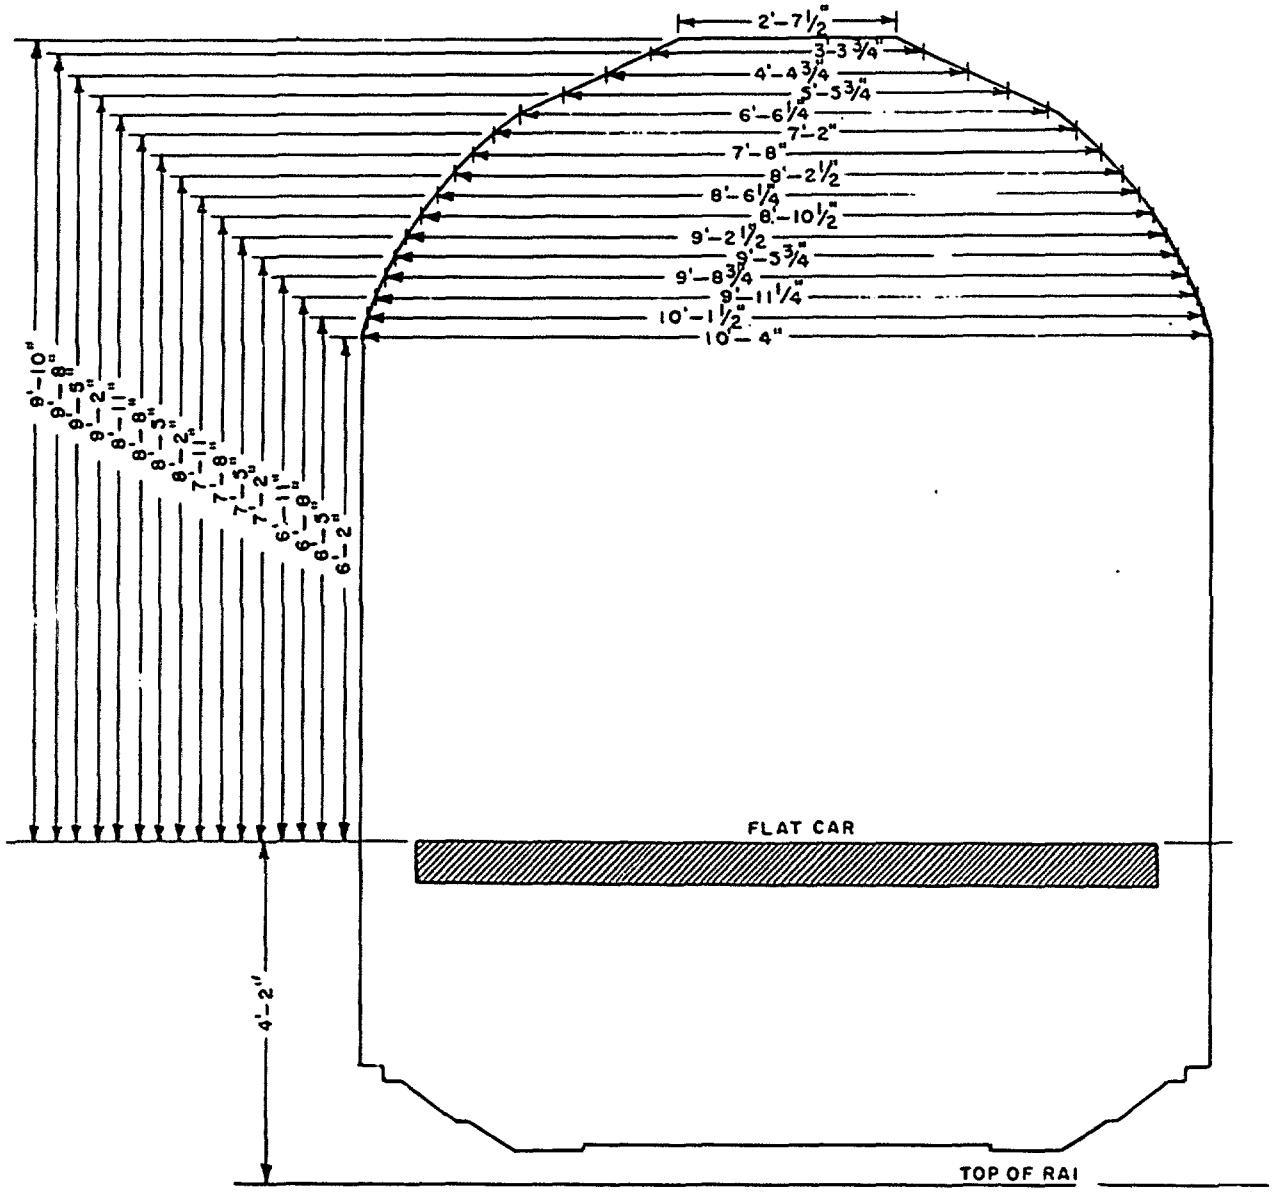

ITEM LENGTH-32'-10"

Figure 1 BERNE INTERNATIONAL
(CLEARANCE DIAGRAM)

A13123-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity (as indicated on reverse hereof).

SPECIFICATION
MIL-A-52470(MO) - Auger, Earth, Truck-Mounted, 36-Inch Diameter Hole, 60-Foot Maximum Depth

ORGANIZATION (Of submitter)	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS (Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)

SUBMITTED BY (Printed or typed name and activity)	DATE

DD FORM 1 APR 63 1426

[illegible] ARMY -- FORT BELVOIR, VA

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:08Z
Check the source to verify that this is the current version before use.