MIL-T-52635A
18 April 1979
SUPERSEDING
MIL-T-52635
28 January 1969

MILITARY SPECIFICATION

TRUCK, STOCK SELECTOR: ELECTRONICALLY AND MANUALLY GUIDED, 1,000 POUND CAPACITY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers an electronic and manually controlled, wire-guided, 1,000 pound capacity, battery operated, elevating carriage stock selector lift truck for warehouse use.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

QQ-C-320	- Chromium Plating (Electrodeposited).
QQ-P-416	- Plating, Cadmium (Electrodeposited).
TT-E-489	- Enamel, Alkyd, Gloss (for Exterior and Interior Surfaces).

FSC 3930

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Mobility Equipment Research and Development Command, ATTN: DRDME-DS, Fort Belvoir, VA 22060 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-P-514	- Plates, Identification, Instruction and Marking, Blank.
MIL-G-3859	- Grease Guns, Hand-Operated, Lever, Push and Screw Type.
MIL-M-3971	- Meters, Time Totalizing, Non-Hermetically Sealed, Electrical: General Specification for.
MIL-F-52723	- Filter Element, Hydraulic, Disposable.

STANDARDS

FEDERAL

FED. STD. No. H28	- Screw-Thread Standards for Federal Services.
FED. STD. No. 595	- Colors.

MILITARY

MIL-STD-130	- Identification Marking of US Military Property.
MIL-STD-162	- Materials Handling Equipment: Preparation for Shipment, Storage, Cyclic Maintenance, Routine Testing and Processing.
MIL-STD-889	- Dissimilar Metals.
MIL-STD-1188	- Commercial Packaging of Supplies and Equipment.
MS15367	- Battery, Storage, For Electric Powered Industrial Trucks and Tractors.

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

B56.1 - Safety Standard for Powered Industrial Trucks.
B56.3 - Standard for Safety for Electric-Battery-Powered Industrial Trucks.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

(Application for copies should be addressed to the American National Standard Institute, 1430 Broadway, New York, NY 10018.)

DEPARTMENT OF LABOR, OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION

29 CFR, Chapter XVII, Part 1910 - Occupational Safety and Health Standards.

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, DC 20402.)

NATIONAL ELECTRICAL MANUFACTURER'S ASSOCIATION

MG1 - Standard for Motors and Generators.

(Application for copies should be addressed to the National Electrical Manufacturer's Association, 155 East 44th Street, New York, NY 10017.)

INDUSTRIAL FASTENERS INSTITUTE

Standard 114 - Standard for Break Mandrel Blind Rivets.

(Application for copies should be addressed to the Industrial Fasteners Institute, 1517 Terminal Tower, Cleveland, OH 44113.)

SOCIETY OF AUTOMOTIVE ENGINEERS

SAE Handbook.

(Application for copies should be addressed to the Society of Automotive Engineers, 400 Commonwealth Drive, Warrendale, PA 15096.)

3. REQUIREMENTS

3.1 Description. The stock selector truck (hereinafter called "truck") shall consist of a battery operated truck capable of lifting and transporting a 1,000 pound capacity load. The truck shall have a maximum overall height of 83 inches and a minimum lift of 130 inches. The truck shall have manual and electronically controlled propulsion and steering systems. The truck shall be manually controlled from the platform. The operator shall be able to raise and lower the platform, and from any platform height shall be able to steer, start, travel in either direction, and stop the truck. While under electronic control only forward travel shall be provided.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:09Z
Check the source to verify that this is the current version before use.

3.2 First article. The contractor shall furnish a truck for examination and test within the time frame specified (see 6.2), to prove prior to starting production that his production methods and choice of design detail will produce trucks that comply with the requirements of this specification. Examinations and tests shall be as specified in Section 4; and, unless otherwise specified herein, all examination and tests shall be conducted by the contractor subject to surveillance and approved by the Government (see 6.3). When specified (see 6.2), the Government will conduct any or all of the first article truck examinations and tests as specified.

3.3 Materials. Materials shall be as specified herein. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification (see 6.6).

3.3.1 Plating. Unless otherwise specified (see 6.2), all threaded fasteners, washers, and cotter pins required to fabricate the truck, except those in contact with oil in reservoirs and those inside components which are corrosion resisting, shall be cadmium plated or made of an appropriate noncorrosive material. Washers shall be cadmium plated in accordance with Type II, Class 3 of QQ-P-416.

3.3.2 Dissimilar metals. All dissimilar metals throughout the truck shall be insulated from one another to preclude galvanic action or electrolytic action. Insulation shall be by a coat of chromate primer, zinc chromate tape, electrical tapes, or other effective means that prevent direct contact. Dissimilar metals are defined in MIL-STD-889, Type II.

3.4 Safety. The truck shall conform to the applicable requirements of ANSI B56.1 and B56.3 for Type E truck, and such additional requirements as specified herein, and with the Occupational Safety and Health Standard requirements of 29 CFR, Chapter XVII, Part 1910.

3.5 Design. The truck shall be designed for a 1000 pound capacity load with the load platform at the specified lift height. Design of truck covered by the specification and all components herein shall insure safe operation when operated as specified herein. There shall be no evidence of accelerated wear, failures, or permanent deformation when operated as specified herein. There shall be no exposed bolts, clamps, gages, fittings, lifting parts, or appendages that can be caught or hooked while the truck is working in a confined space.

3.5.1 Bearings. Unless otherwise specified herein, rotating parts shall be mounted on ball, roller, or tapered bearings to the extent normally provided in standard commercial practice.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:09Z
Check the source to verify that this is the current version before use.

3.5.2 Lubrication. All surfaces requiring lubrication shall be provided with a means for lubricating.

3.5.2.1 Lubrication fittings. Lubrication fittings shall conform to SAE J534. Fittings shall be located in a protected position and shall be accessible to a hand-operated grease gun conforming tc MIL-G-3859 with a 10-inch flexible extension. Accessibility to fittings shall be provided without the removal or adjustment of accessories or parts. Panels and plates equipped with hand-operable, quick-disconnect fasteners or not more than eight common fasteners may be used to provide accessibility.

3.5.3 Interchangeability. All parts having the same part number shall be functionally and dimensionally interchangeable. Common hardware and fasteners such as bolts, nuts, and screws shall be held to a minimum number of types and sizes.

3.5.4 Screw threads. Screw threads shall be in accordance with FED.STD. No. H28.

3.6 Electrical system.

3.6.1 Electronic control. A magnetic sensing device mounted on the truck shall control the forward direction of the truck by detecting a 10 kilohertz signal from a guide wire recessed in the floor. The device shall keep the truck centered over the wire at all times. A signal level detector shall measure the signal level to permit guidance only when signal strength is sufficient. The traction motor shall not operate when on guidance without sufficient signal strength. The sensing device shall be capable of receiving the signal from a maximum distance of 4 inches from the guide wire. Unless otherwise specified, the signal shall be generated and transmitted through the guide wire by a converter-transmitter operating on a 120-volt, 60 cycle, single phase ac system.

3.6.2 Resistors. Resistors, when provided, shall be rated for continuous truck use and shall not result in burnout or fusion when tested as specified in 4.5.9.

3.6.3 Overcurrent devices. Overcurrent devices shall be provided for the protection of power and pilot circuit conductors.

3.6.4 Console panel. The console panel shall be designed for removal as a unit, or removal of individual components mounted thereon. The panel shall be equipped with covers which shall be removable without interference from the truck structure.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:09Z
Check the source to verify that this is the currentversion before use.

3.6.5 Electric conductors. Electric conductors runs shall be so located and shielded within the truck frame and body to provide protection from physical damage. All wires and cables shall be coded by marking or color for identification purposes. Tied, clipped, or stick-on-type tags are not acceptable. All wiring external to the truck body and frame subject to damage shall be encased in metal conduit. Exposed wiring runs in the operator's platform area shall also be in metal conduit. Conductors passing through compartment walls and other barriers shall be protected by loom, rubber hose, or other protective material, and shall be securely anchored. All terminal connectors shall be fastened with lock washers, lock nuts, or provided with other means of preventing loosening by vibration and unintentional movement of wire terminal ends. Cables to the moving platform operating console shall be heavy-duty, oil-resistant, and protected from damage by location and position regardless of platform position. When sheaves are used for routing of cables, the sheave diameter shall be not less than 10 times the cable diamter. Means shall be provided to prevent cable from jumping off sheave.

3.6.6 Converter-transmitter. Converter-transmitters in quantities specified (see 6.2), shall be furnished, and shall emit a low-voltage, low-current radio signal not to exceed 12 kilo hertz. The signal shall be sufficient to allow the sensing unit to meet receiving conditions as specified in 3.6.1 at any point along the guide wire.

3.6.7 Guide wire. Unless otherwise specified, guide wire shall be 14-gage multi-strand wire, vinyl covered. The wire shall carry the signal as specified in 3.6.6. The wire shall be imbedded in the floor at a minimum depth of 1/4 inch. The length of wire shall be as specified (see 6.2).

3.7 Power system.

3.7.1 Motors. Motors shall be either series or compound wound, heavy-duty industrial type, and shall operate on 24 volts direct current (dc). Motors shall without auxiliary cooling, withstand the mechanical stresses and current loads induced when tested as specified in 4.5.9. The resultant strains and temperature rise shall not cause failure of any component or part, excessive pitting, or other than normal discoloration of the commutators. The hydraulic pump motors shall have sufficient capacity to steer the truck and simultaneously lift rated load at lift speeds specified herein. Motors shall be directly connected to the pump and shall be capable of withstanding continual operation without evidence of insulation breakdown, short circuit, or failure of any component.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:09Z
Check the source to verify that this is the currentversion before use.

3.7.1.1 Insulation. Insulation for motors shall be Class A, B, H, F, or combination thereof, as defined in NEMA Standard MG1. Insulation shall be selected to give the best balance of operating characteristics of torque, speed, and temperature rise. The class of insulation shall be determined by the material with the lowest temperature rise used in the insulating system. Armatures and fields need not have the same class of insulation, but each part shall meet the temperature rise of its class of insulation.

3.7.2 Contactor assembly. Contactors shall be the magnetic clapper or internal solenoid type. Contactors shall have maximum interchangeability of parts with replaceable tips of copper or silver alloy composition. All contactors shall be accessible and shall be the contractor's standard commercial component.

3.7.3 Battery. Unless otherwise specified (see 6.2), batteries will be furnished with the truck. They shall be 870 ampere hours in accordance with MS15367. Batteries shall be equipped with Industry standard type EC locking half connectors attached to flexible leads.

3.7.3.1 Battery connectors. Truck shall be equipped with industry standard type EC mounting half connectors suitably located to fit the locking half specified in 3.7.3. Charging connectors shall be so arranged that the truck cannot be operated while the truck is connected to the charging source. Battery leads shall be as short as practicable to minimize resistance losses and no smaller than No. 00 AWG.

3.7.3.2 Battery compartment. A battery box or battery compartment shall be provided at the most rearward location. Effective means shall be provided for securing the battery in place and to prevent lateral movement of the battery. The compartment shall be constructed to permit removal and installation of the battery from either side or top of the truck. Rollers or other means shall be furnished to permit side removal or replacement of the battery by a force not exceeding 75 pounds. The inside of the compartment shall be finished with an acid- and alkaline-resistant paint to resist deterioration through normal contact with electrolyte. The compartment shall be accessible for cleaning and battery servicing, and shall contain no inaccessible pockets or reservoirs which are difficult to keep clean. The battery box shall be capable of being assembled into the truck frame.

3.7.4 Drive unit. The drives shall be gear or double roller chain (or combination thereof) reduction units connected directly to the drive wheels. Where a gear unit is used, it shall operate in a constant oil bath. Drive

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:09Z
Check the source to verify that this is the currentversion before use.

gear housings shall be equipped with filler and magnetic drain plugs accessible for servicing without removing major components. The drain outlet shall be located so that removal of the plug will result in complete drainage of the lubrication from the enclosure. Drainage shall be to the ground when the truck is in its normal position. Integral tubes or troughs may be used to convey the lubrication from the drain outlet to the ground. Where a chain drive is used, slack adjustment shall be provided and shall not require shimming of the motor.

3.7.5 Hydraulic system. Power used for lifting shall be furnished by a hydraulic pump directly driven by an electric motor independent of the traction motor. The lifting system shall provide for smooth lowering of the load at a speed of not greater than 80 fpm in event of failure or damage to hydraulic lines. Provision shall be made to protect the hydraulic system against excessive pressures due to overloading. The sump tank and hydraulic system shall be capable of being drained without spillage. The storage tank breather and filler cap, lift, and extension cylinders shall be provided with protection against contamination of hydraulic fluid by direct impingement of water. A full flow oil filter conforming to MIL-F-52723 and a filter type breather cap shall be provided. The storage tank shall be of welded steel construction and shall have a capacity not less than 110 percent of the amount of fluid required for the hydraulic system's operation, and in addition, shall have sufficient capacity to prevent air from entering the hydraulic system with the hydraulic piston fully extended, and shall have sufficient free air capacity to prevent oil being discharged through the tank filler cap when maximum return flow of oil is surged into the tank from the system. The piston rod shall be provided with a hard chrome-plated finish. Surfaces shall be thoroughly cleaned prior to plating. Plating shall be electro-deposited hard chromium finish, as per QQ-C-320, Class 2, Type I. The lifting cylinder shall be provided with "wiper rings" to preclude entry of dust or dirt into the packing. The hydraulic valve and cylinder shall have means for preventing oil seepage from dripping or running onto electrical element.

3.8 Structure.

3.8.1 Chassis and frame. The frame and related structure shall be fabricated from steel and steel castings. The frame and related structure shall be sufficiently strong and well braced to prevent racking or twisting that might result in permanent distortion of any component or member. The frame and related structure shall have sufficient depth to afford protection for working parts, and shall withstand the tests specified in 4.5 without evidence of permanent deflection or distortion.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

3.8.2 Body. The truck body shall be constructed of sheet steel or plate. In addition, the truck body shall completely cover the drive unit assembly, steering mechanism, and speed controller, when these components are not housed in individual containers. Provision shall be made for access to all working parts requiring inspection and maintenance. If hand openings are provided, the edge of the opening shall be smooth and shall be provided with a removable or hinged cover. Covers shall be secured with bolts or quick-opening fasteners removable with ordinary hand tools. The overall width of the truck body shall not exceed 42 inches. The corners of the truck shall be rounded to reduce steering radius.

3.8.2.1 Load deck and shelves. The load deck shall be fabricated from steel plate fastened to support arms attached to the lift carriage. The deck shall be not less than 40 inches wide by 40 inches long minimum. There shall be two steel folding shelves fastened to the backrest. The shelves shall be not less than 34 inches wide by 16 inches deep, and shall be self-locking in both the open and closed positions. The deck shall not extend beyond the widest part of the truck base and the shelves shall not extend beyond the backrest. (The front end of the load deck shall have a 1/2 inch lip across the width of the deck.) The deck shall be sufficiently rigid to withstand tests specified in 4.5. The deck in the lowered position shall be 43 inches plus or minus 3 inches from the floor.

3.8.2.1.1 Load backrest. A metal backrest shall be provided to prevent the load from falling into the lift mechanism. The backrest shall extend from the load deck surface to the collapsed height of the mast and shall be of the same width as the load deck. The backrest shall be firmly attached to the lift mechanism or load deck. The backrest shall provide for visibility such that the operator can see the floor when traveling in the rearward direction.

3.8.2.2 Operator's compartment. An operator's compartment shall be provided at the extreme forward end of the vehicle and shall be of a size to accommodate a large man clothed as specified in SAE J833. The compartment shall lift and lower with the load deck. The compartment shall be enclosed with a guard rail at the outer edge of the compartment to prevent the operator from falling off the truck. The guard rail shall be even with the top of the load deck. A foot guard not less than 18 inches nor more than 24 inches high, measured from the ground to the top of the guard with the compartment in the lowered position, shall be provided at the outer edge of the compartment to prevent the operator's foot from protruding beyond the confines of the compartment. A gate located at the extreme forward end of the compartment shall be provided to allow access to and from the compartment. The

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

gate shall open outward from the compartment. A latch to automatically secure the gate when closed shall be provided. The latch shall be designed or located so as to prevent inadvertent unlocking. A safety switch shall be provided for disrupting all power to the truck when the gate is opened. The compartment floor shall be provided with a rubber tread not less than 1/4-inch thick and cement-bonded to the floor. The compartment floor shall be not less than 30 inches and not more than 35 inches below the load deck. The control unit shall be mounted for right hand operation and located so that the operator shall be facing forward while operating the truck. The front end of the operator's compartment shall be rounded to allow for ease of steering around corners. Unless otherwise specified (see 6.2), the compartment shall be equipped with an overhead guard in accordance with ANSI B56.1.

3.8.3 Uprights. The uprights shall be of the telescopic type with sufficient strength and rigidity to withstand, without permanent deformation, stresses induced when tested as specified in 4.5. Means shall be provided in the uprights to compensate, by adjustment or replacement, for wear which may develop between sliding surfaces or lateral rolling contacts. Upper and lower "limit stops" shall be provided to prevent overtravel. The uprights lift arrangement shall be designed to control and prevent premature elevation of an intermediate section during raising or "hanging up" of these sections during lowering.

3.8.4 Wheels. The wheels shall be steel, cast iron, or cast aluminum equipped with anti-friction bearings.

3.8.4.1 Drive wheel tires. The drive wheel tires shall be of the industrial, solid rubber, cushion or polyurethane type with nondirectional tread, molded onto a band for pressing onto a flatfaced wheel. The tire loading shall not exceed the tire manufacturer's rating for the application.

3.8.4.2 Nondriving tires. Nondriving tires shall be polyurethane tread. The tire loading shall not exceed the tire manufacturer's rating for the application.

3.8.5 Steering system. The steering of the truck shall be accomplished by an electric power steering system consisting of a servo-actuated drive motor positioning the steerable wheel of the truck. The motor shall be positively connected to the steerable wheel. The steering system shall be capable of being manually operated by the driver or automatically controlled by an electronic sensing device, as selected by the operator.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

3.8.5.1 Manual steering. A steering handle or wheel shall be mounted at the front of the operator's compartment for manual steering. The steering control may be integral with the speed and directional control. The servo-operated steering system shall be controlled by the position of the steering handle or wheel. The steer wheel shall always be alined in the same position as the steering device.

3.8.5.2 Automatic steering. The steerable truck wheel shall be positioned directly over the energized guide wire by the sensing device as specified in 3.6.1 actuating the servo-operated steering system. An indicator light shall be mounted on the control panel to indicate when the sensing unit is receiving the signal.

3.8.6 Brakes. Brakes shall be of the mechanical or hydraulic external contracting, internal expanding, or disc type, mounted on the traction motor shafts, countershafts, or drive wheels. Brakes shall be protected to insure required operation and shall have provisions for serving and adjustment.

3.8.6.1 Service-deadman brake. The brake shall be a combination service-deadman brake. The deadman brake shall be electrically released and shall be applied when the actuating device is released for both manual and guidance operation. The braking system shall be interlocked with a switch which shall interrupt the electrical current to the traction motor when the deadman brake is actuated. The control system shall be so arranged that when the ciruit is broken, it cannot be reestablished at any but first speed controller position. The actuating device, when depressed to fully release the brake, shall be flush with the top of the operator's platform. Force required to hold the pedal fully depressed shall not exceed 10 pounds.

3.9 Controls and instrumentation. Electric controls shall be of the heavy-duty type. Electric controls and instrumentation shall be moisture-resistant.

3.9.1 Controls. All controls shall be provided with a position diagram or marking at the control visible to the operator. The centerline distance betwen adjacent controls shall be not less than 2-1/2 inches. All hand controls shall have a directional motion of the hand similar to the resulting motion of the truck operation to be performed, insofar as possible.

3.9.1.1 Directional speed controls. Directional and speed controls shall be provided for both manual and automatic mode of operation. When in the manual mode of operation selective forward and reverse speed controls shall be provided and shall be located for safe, convenient and efficient right hand-operation with the operator facing forward. Speed and directional control shall be a rotary control. The control shall have a forward motion for forward direction and a rearward motion for rearward direction. The control shall automatically return to neutral position upon release by the operator. The control shall provide means to permit precision maneuvering in

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

restricted areas. When in the automatic mode of operation an automatic guidance switch shall be located on the floor of the operator's compartment for right foot operation when the operator is facing forward. The speed controller shall provide for two speeds, low and high (manual and automatic modes) and low speed in the reverse direction (manual mode only). A self-actuating cutout switch shall be provided to prevent operation of the truck at greater than low speed when the floor of the operator's compartment is raised 60 inches or more above the lowered position. Automatic means shall be provided to prevent current flow to the motors without first going through the successive accelerating steps in sequence and to prevent reversal of direction except through first speed. A time delay mechanism shall be furnished to control the time required to progressively pass through each successive sequence step, and to progress through all steps in not less than 0.75 seconds. Automatic means shall be provided to limit the plugging current to approximately one-fourth of top acceleration value when the controller is reversed with the truck in motion. There shall be no excessive pitting, fusion, or other evidence of wear on the contactor or controller assembly after the truck has been tested as specified in 4.5.9.

3.9.1.2 Lift and lowering control. Lift and lowering control shall be a switch or lever type and shall return to the "off" position when released. The control shall provide for lift and lowering of the load platform when the truck is in motion without requiring the operator to release the steering control or speed controls while on manual steering. Upward or forward motion of the lever-type control shall raise the load platform, and lowering or backward motion shall lower the platform. The speed of lift and lowering shall be controllable with and without a load on the platform.

3.9.1.3 Switches. A key type on/off switch, deck light switch, and switch for automatic and manual steering shall be provided. All switches shall be located on a control panel except for the automatic guidance switch which shall be located on the floor of the operator's compartment for right foot operation when the operator is facing forward.

3.9.1.4 Hourmeter. An electric operational hourmeter, which registers only the total number of operating hours of the motors, shall be provided. Hourmeters shall conform to MIL-M-3971, Type I, Grade B. The hourmeter need not be visible to the operator, but shall be located so that it is accessible and visible to an observer standing on the floor. The hourmeter shall be wired to record only powered operations. The lock and brake cut-out switches shall not be included in the hourmeter circuit.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:09Z
Check the source to verify that this is the currentversion before use.

3.10 Accessories.

3.10.1 Horn. The truck shall be equipped with an electric horn, with pushbutton, mounted for operation by the operator. The horn shall be operable without requiring the operator to release the steering or directional controls. The horn button assembly and electrical wiring for the horn shall be moisture-resistant.

3.10.2 Light. Unless otherwise specified (see 6.2), the truck shall be equipped with a light of not less than 50 candlepower mounted on the mast. The light shall be directed in such a manner as to illuminate the load deck, shelves, and work area up to a distance of 24 inches either side of the load deck. Protection against damage by position or guard shall be provided.

3.10.3 Storage and supply compartment. When specified (see 6.2), a storage and supply compartment shall be mounted on the rear wall of the operator's compartment. The compartment shall be of sufficient size to hold 8-1/2 by 11 inch sheets of paper, stapler, screw driver, rubber stamp and pad, and clipboard.

3.11 Performance. The truck shall perform as specified herein when equipped with a fully charged battery.

3.11.1 Lifting speed. Lifting speed with capacity load shall be not less than 25 feet per minute (fpm) over the entire distance from ground level to maximum lift height when tested as specified in 4.5.3.

3.11.2 Lowering speed. Speed of lowering with capacity load shall be not less than 25 fpm nor more than 46.5 fpm over the entire distance from maximum lift height to ground level height when tested as specified in 4.5.3. There shall be no pulsating or jerky movement of the platform when being lowered at maximum speed with valve fully opened. The hydraulic control system shall be damped, metered, or manually regulated to reduce shock and prevent the truck from overturning when the maximum capacity load is lowered at maximum speed and then stopped suddenly.

3.11.3 Travel speed. The truck shall have a minimum of two speeds forward when operated either manually or on electronic guidance. One reverse speed shall be provided for manual operation. The truck shall have a high speed forward of not less than 3 miles per hour and a low speed forward and reverse of not less than 1.0 nor more than 1.5 miles per hour when tested as specified in 4.5.4. Use of multiple batteries for speed selection will not be acceptable.

3.11.4 Lift height. The minimum lift height of the truck shall be not less than 130 inches measured from ground level to the top of the floor of the operator's compartment when tested as specified in 4.5.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

3.11.5 Steering. The steering motor shall be capable of actuating the steer wheel at a rate to allow the truck to be steered from a 48-inch aisle across a 36-inch bin face, and into an adjacent 48-inch aisle within a 108-inch cross aisle, while traveling at low speed on automatic guidance when tested as specified in 4.5.6. When operating on manual steering, the steer wheel shall follow the steering control at any position and shall return to center position when the steering control returns to the center position.

3.11.6 Stability. The truck shall not overturn or show signs of instability when tested as specified in 4.5.6.

3.11.7 Acceleration. The truck with a capacity load, from a standing start, shall have an average acceleration rate in the forward direction to negotiate a distance of 22 feet in 6 seconds when tested as specified in 4.5.5.

3.11.8 Structural overload. The truck shall be capable of withstanding a 1,500 pound load equally distributed over the load deck when tested as specified in 4.5.7. The truck shall show no signs of permanent deformation, malfunction, or structural failure when subjected to this load.

3.11.9 Hydraulic system. The hydraulic system shall show no leakage or breakage when the truck is tested as specified in 4.5.7 with the pressure relief valve inoperative. The pressure relief valve shall open when pressure equal no more than 120 percent of the maximum pressure required to lift the maximum capacity load.

3.11.10 Underclearance. The truck shall have a minimum underclearance to any portion of the truck of 1-1/2 inches when carrying the capacity load.

3.11.11 Shelves. The shelves specified in 3.8.2.1 shall be capable of withstanding without damage or permanent deformation a 160 pound load when tested as specified in 4.5.8.

3.12 Treatment and painting. The truck shall be cleaned, treated, and painted in accordance with commercial practice, except that the finish coat shall conform to TT-E-489. Color shall be yellow gloss Color No. 13538 conforming to FED. STD. No. 595. The first article model required for test and evaluation in accordance with this specification shall be painted with one primer coat only. Machined or polished surfaces shall be masked prior to painting.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

3.13 Identification marking. The truck shall be identified with an identification plate conforming to MIL-P-514, Type I, Style 1, Composition C, of Type I, Grade A, Class 1 material which shall be in a visible and safe location on the bulkheads or panel of the operator's compartment of the truck. The identifying data to be applied to the identification plates shall be as indicated herein and as defined in MIL-STD-130. Identification data shall include National Stock Number (if applicable), contract number, serial number, and U.S. Military Property Number. The truck shall also be equipped with instruction, warning, and caution plates conforming to MIL-P-514, Type III, Composition C, of Type I, Grade A, Class 1 material, prominently located and describing any special or important procedure to be followed in operating, loading, and servicing of the truck or its components. All plates shall be securely attached to the truck with screws, bolts, or rivets, and shall be furnished and mounted by the contractors.

3.14 Shipping data plate. Shipping data plate shall conform to MIL-P-514, Type III, Composition C, of Type I, Grade A, Class 1 material and, in addition, shall show the silhouette of the truck in transport position indicating tiedown procedures, the center of gravity and the location and capacity of the lifting attachments. The plates shall be attached by screws, bolts, or rivets in a conspicuous location.

3.15 Instruction plates. Each truck shall be equipped with instruction plates or diagrams, including warnings and cautions, describing any special or important procedures to be followed in assembling, operating, loading, or servicing the truck. Instruction plates shall conform to MIL-P-514, Type III Composition C, of Type I, Grade A, Class 1 material. Plates shall be attached by screws, bolts, or rivets in a conspicuous protected location.

3.16 Vehicle marking. Unless otherwise specified (see 6.2), the assigned registration number for each truck shall be painted by the contractor, in black enamel, block numbers 3 inches high on each side of the upright mast. In addition, the gross vehicle weight (GVW) with the required battery shall be marked on each side of the truck. The letters shall be Gothic capitals, and the numbers shall be 2 inches high where space permits.

3.17 Maintainability. Provision shall be made for adjustment, service, or replacement of all electrical assemblies and components, battery, wearing parts of steering assembly, tires, wheels, and horn without the removal of any major parts other than covers. The truck shall have repairable printed circuit boards.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:09Z
Check the source to verify that this is the currentversion before use.

3.17.1 Maintenance. The truck, when tested as specified in 4.5.9 shall not require any maintenance.

3.17.1.1 Maintenance operation. Unless otherwise specified herein, each operation in the following maintenance operations list shall be accomplished by one man in not more than the time specified, using common tools and special tools, if any.

Maintenance Operation	Time (in minutes)
(a) Remove and replace drive rotor brushes.	60
(b) Remove and replace hoist motor brushes.	60
(c) Remove and replace all contactor tips.	45
(d) Remove and replace all filters, screens, and strainers in hydraulic system.	45

3.18 Workmanship.

3.18.1 Castings and forgings. All parts, components, and assemblies of the truck which include castings and forgings shall be clean of harmful extraneous material such as sand, dirt, sprues, scale and flux. Rework shall be limited to procedures which do not reduce mechanical properties or affect function. Castings with fastener holes shall provide for correct seating of fasteners such as bolt, lockwasher, and nut assemblies and cap-screws.

3.18.2 Steel and other metal fabrication. Metals used in the fabrication of the truck shall provide original quality surface finish and shall be free from kinks and sharp bends. Metals having eroded or pitted surfaces are not acceptable. Burrs and sharp edges in holes and on sheets, plates, and members shall be removed sufficiently to assure correct fit and to prevent loosening of fasteners and damage to components.

3.18.3 Welding. The surfaces of parts to be welded shall be free from rust, scale, paint, grease, mill scale that can be removed by chipping and wire brushing, and other foreign matter. Welds shall transmit stress without permanent deformation or failure when the parts connected by the welds are subjected to proof and service loading. Parent materials, weld filler

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:09Z
Check the source to verify that this is the current version before use.

metals, and fabrication techniques shall be as required to enable the truck to conform to the examination and test requirements specified in Section 4. Parts to be joined by filler welds shall be brought into as close contact as possible and in no event shall be separated by more than 3/16 inch unless appropriate bridging techniques are used. The welding process used in fabrication of the truck shall be at the option of the contractor.

3.18.4 Bolted connections. Boltholes shall be accurately formed and shall have the burrs removed. Washers, lockwashers, or other positive lock devices shall be provided where necessary. Matching thread areas securing bolts conforming to SAE J429 or capscrews shall be of sufficient strength to withstand the tensile strength of the bolt. All fasteners shall be correctly torqued and shall have full thread engagement.

3.18.5 Riveted connections. Rivets shall fill the holes completely. The upset rivet heads shall be full, neatly made, concentric with the rivet holes, and in full contact with the surface of the member, and shall be in accordance with SAE J492 or Industrial Fastener Institute Standard No. 114 for Break Mandrel Blind Rivets.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

(a) First article truck inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).
(c) Inspection comparison (see 4.6).

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:09Z
Check the source to verify that this is the current version before use.

(d) Inspection of packaging (see 4.7).

4.3 First article truck inspection. The truck furnished in accordance with 3.2 shall be examined and tested in accordance with 4.3.1 through 4.3.3.

4.3.1 Examination. Prior to testing, the first article truck shall be examined for the defects marked "X" in Column 1 of Table I. Presence of one or more defects shall be cause for rejection.

4.3.2 Tests. Upon successful completion of the examination specified in 4.3.1, the truck and components shall be subjected to the tests marked "X" in Column 1 of Table II.

4.3.3 Post-test disassembly and examination. Upon successful completion of all tests specified in 4.3.2, the truck shall be subjected to the tests marked "X" in Column 3 of Table II.

4.3.4 Inspection failure. Failure of a first article truck to meet any requirement specified herein during and as a result of the examination and tests specified in 4.3 through 4.3.3 shall be cause for rejection of the first article truck and for refusal by the Government to continue acceptance of production trucks until evidence has been provided by the contractor that corrective action has been taken to eliminate the deficiencies. Correction of such deficiencies shall be accomplished by the contractor at no cost to the Government on trucks previously accepted and produced under the contract. Any deficiencies found as a result of the first article inspection will be considered prima facie evidence that all trucks accepted prior to the completion of the first article inspection are similarly deficient unless evidence to the contrary is furnished by the contractor and such evidence is acceptable to the contracting officer.

4.4 Quality conformance inspection.

4.4.1 Examination. After successful completion of all tests specified in 4.4.2, each truck shall be examined for the defects marked "X" in Column 2 of Table I. Presence of one or more defects shall be cause for rejection.

4.4.2 Tests. Each truck shall be tested as specified in Column 2 of Table II. Failure of any test shall be cause for rejection. Hydraulic cylinders may be tested prior to installation in the truck.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:09Z
Check the source to verify that this is the current version before use.

Table I. Inspection Schedule

Preproduction Inspection 1	Quality Conformance 2	Defect 3	Requirement Paragraph 4
X	-	101. Material not as specified.	3.3
X	-	102. Plating not as specified.	3.3.1
X	-	103. Safety not as specified.	3.4
X	X	104. Lubrication and fittings not as specified.	3.5.2.1
X	-	105. Screw threads not as specified.	3.5.4
X	X	106. Electronic control not as specified.	3.6.1
X	X	107. Overcurrent devices not as specified.	3.6.3
X	-	108. Console panel not as specified.	3.6.4
X	-	109. Insulation not as specified.	3.7.1.1
X	-	110. Contactor assembly not as specified.	3.7.2
X	X	111. Battery not as specified.	3.7.3
X	X	112. Battery compartment not as specified.	3.7.3.2
X	-	113. Drive unit not as specified.	3.7.4
X	-	114. Hydraulic system not as specified.	3.7.5
X	-	115. Body not as specified.	3.8.2
X	-	116. Load deck and shelves not as specified.	3.8.2.1
X	X	117. Load backrest not as specified.	3.8.2.1.1
X	-	118. Operator's compartment not as specified.	3.8.2.2
X	-	119. Wheels not as specified.	3.8.4
X	X	120. Controls and instrumentation not as specified.	3.9
X	X	121. Horn not as specified.	3.10.1
X	X	122. Lights not as specified.	3.10.2
X	X	123. Treatment and painting not as specified.	3.12
X	X	124. Identification marking not as specified.	3.13
X	X	125. Shipping data plate not as specified.	3.14

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:09Z
Check the source to verify that this is the currentversion before use.

Table I. Inspection Schedule (Cont'd)

1	2	3	4
X	X	126. Vehicle marking not as specified.	3.16
X	X	127. Maintainability not as specified.	3.17
X	X	128. Castings and forgings not as specified.	3.18.1
X	X	129. Metal fabrication not as specified.	3.18.2
X	X	132. Riveted connections not as specified.	3.18.5

Table II. Test Schedule

Preproduction	Quality Conformance	Post Test	Test	Test Paragraph	Requirement Paragraph
1	2	3	4	5	6
X	-	X	Lift height.	4.5.2	3.11.4
X	X	X	Lift speed, lowering speed.	4.5.3	3.11.1 & 3.11.3
X	X	X	Travel speed.	4.5.4	3.11.3
X	-	X	Acceleration.	4.5.5	3.11.7
X	-	-	Stability.	4.5.6	3.11.6
X	-	X	Steering.	4.5.6	3.11.5
X	-	-	Structural.	4.5.7	3.11.8
X	-	-	Hydraulic system.	4.5.7	3.11.9
X	-	-	Endurance.	4.5.9	3.6.2, 3.7.1, 3.9.1.1
X	-	-	Maintainability.	4.5.10	3.17

4.5 Tests. Tests shall be conducted in accordance with the test schedule specified in Table II. An "X" in the column indicates the tests that shall be conducted.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:09Z
Check the source to verify that this is the currentversion before use.

4.5.1 Test conditions. Unless otherwise specified herein, tests shall be conducted at the ambient temperature and climatic conditions existing at the place of test. Only that maintenance established by the contractor and submitted as maintenance schedule prior to commencement of the tests shall be performed during the tests. Test methods referenced in tests specified herein are those contained in the Appendix.

4.5.2 Lift height. Elevate the operator's platform with capacity load to the maximum height. Measure and record the true vertical distance from the ground to the top of the floor of the operator's compartment. A measurement of less than 130 inches shall constitute failure of this test.

4.5.3 Lifting and lowering speed. Place the truck with capacity load on a flat level surface. Measure height of floor of operator's compartment in fully lowered position. Record time to raise lift mechanism to 130 inches measured at the floor of the operator's compartment. Record time to lower lift mechanism to fully lowered position. A time of more than 26 seconds to raise 130 inches shall constitute failure of this test. A time of more than 26 seconds or less than 14 seconds to lower to the fully lowered position shall constitute failure of this test.

4.5.4 Travel speed. Place the truck with capacity load on a dry level surface. With the truck traveling in low speed forward, record time to traverse 88 feet. With the truck traveling in high speed forward, record time to traverse 88 feet. Record time for truck to traverse 88 feet in reverse. Either of the following shall constitute failure of this test:

(a) Low and reverse speed time of less than 45 seconds or more than 60 seconds.
(b) High speed time greater than 20 seconds to traverse 88 feet.

4.5.5 Acceleration. Place the truck with capacity load on a dry level surface. From a standing start, record time to traverse 22 feet. A time of more than 6 seconds shall constitute failure of this test. This test shall be conducted a minimum of three times.

4.5.6 Steering and stability. Using a wooden barricade or other means, lay out an area consisting of two adjacent 48-inch wide aisles separated by a 36-inch wide area and crossed at right angles at one end by a 108-inch aisle. Lay out guidance wire from one 48-inch aisle through the 108-inch aisle across the 36-inch space into the adjacent 48-inch aisle. With truck carrying the capacity load and operating in low speed in a fully raised position on electronic guidance, operate the truck from one 48-inch aisle across the 36-inch space into the adjacent 48-inch aisle within the confines

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

of the 108-inch cross aisle. This test shall be performed on a continuous loop for 10 cycles. Nonconformance to 3.11.5, 3.11.6, or evidence of the truck losing guidance signal, any portion of the track travel outside the confines of the barricade, or any wheel leaving the ground shall constitute failure of this test.

4.5.7 Structural overload and hydraulic system. Place truck on a level surface. Raise the operator's platform a minimum of 20 inches from the floor. Place a 1,500 pound load uniformly distributed over the load deck and hold for 5 minutes. Determine hydraulic pressure required to lift the capacity load. Apply load to lift mechanism until 120 percent of predetermined pressure required has been reached. Nonconformance to 3.11.8 and 3.11.9 shall constitute failure of this test.

4.5.8 Shelf structural. With the two shelves in load carrying position place a uniformly distributed load of 160 pounds on each shelf. Hold for 5 minutes. Nonconformance to 3.11.11 shall constitute failure of this test.

4.5.9 Endurance.

4.5.9.1 Layout of course. The test course shall be set up equivalent to the provisions of Figure 1. Aisle widths and dividing barriers shall not deviate from the dimensions shown. The course perimeter shall be demarcated with suitable barriers or indicators to assist in keeping the truck under test within the course limits.

4.5.9.2 Course surface. The course shall be concrete having a rolling resistance of approximately 30-50 pounds per ton. It shall be dry, level, clean, and free of obstacles while conducting the test.

4.5.9.3 Duration of course. The truck shall complete 200 cycles of the test course without maintenance. The test shall be conducted on a continuing basis during each operating 8 hour day. No recharging of the truck battery will be permitted during the test. The truck shall commence testing with a fully charged battery. Nonconformance to this requirements shall constitute failure of this test.

4.5.9.4 Method of negotiating course. The truck under test shall begin each cycle at the point labeled "start" on Figure 1. Prior to starting each cycle the operator shall sound the horn and turn on the load deck illumination light. Light will be turned off at the completion of each cycle. One cycle shall consist of operating on the guidance and manual paths as shown in Figure 1. Unless otherwise specified, the operator shall perform

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

lift and lowering operations while in transit, however, actual heights need not be met while in transit but may be completed at the designated areas. All lift and lowering measurements shall be made from the floor of the operator's compartment. The truck shall come to a complete stop at each point marked with a letter on the test course in Figure 1. With capacity load on load deck, and beginning at point marked "start" proceed to position "A" lifting to 20 inches. Proceed to point "B" raising load to 100 inches. Continue on to point "C" lowering to 60 inches. Raise to full lift height then proceed to point "D". Move on to point "E" lowering to 50 inches. Continue at this height to point "F". Proceed on to point "G" raising to full lift height while in travel. Continue on to point "H" lowering load to 70 inches. Move on to point "I" lowering to fully lowered position. The truck shall be on guidance from start through points "A" to "I" and shall negotiate the remainder of the course under manual operation. Proceed on to point "J" raising to 20 inches. Continue on to point "K" raising to 50 inches. From point "K" lower to fully lowered position and proceed on to point "L". At point "L" raise load to 70 inches and proceed in reverse direction back to point "K". Move on to point "M" in a forward direction. Continue on to point "N" lowering to 40 inches. Proceed on to point "O" lowering to fully collapsed position. Return to starting point. Inability to complete 200 cycles of the test course as specified, evidence of any malfunction, breakage, permanent deformation, or evidence of instability shall constitute failure of this test.

4.5.10 Maintainability. Examine truck for accessibility of major assemblies. Examine position of drains with respect to accessibility. Demonstrate that major assemblies are accessible for repair and maintenance. Perform and time each operation on the maintenance operations list (see 3.17.1.1).

4.6 Inspection comparison. The Government may select trucks at any time during the contract production period and subject these trucks to the examination and the tests specified in 4.5 to determine conformance to the requirements of this specification. The inspection will be performed by the Government, at a site selected by the Government, on units selected at random from those which have been accepted by the Government and will not include the previously inspected preproduction truck. In addition to any test specified as part of the inspection comparison, the Government reserves the right to conduct any and all other tests contained in this specification as part of the inspection comparison and failure of such additional tests shall have the same effect as failure of those tests specified as inspection comparison.

4.6.1 Inspection failure. Failure of an inspection comparison truck to meet any requirement specified herein during and as a result of the examin-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

ation and tests specified in 4.5 shall be cause for rejection of the inspection comparison truck and shall be cause for refusal by the Government to continue acceptance of production trucks until evidence has been provided by the contractor that corrective action has been taken to eliminate the deficiencies. Correction of such deficiencies shall be accomplished by the contractor at no cost to the Government on trucks previosuly accepted and produced under the contract. Any deficiencies found as a result of the inspection comparison will be considered prima facie evidence that all trucks accepted prior to the completion of inspection comparison are similarly deficient unless evidence to the contrary is furnished by the contractor and such evidence is acceptable to the contracting officer.

4.7 Inspection of packaging. Inspection of preservation, packing, and marking for Level A shall be in accordance with MIL-STD-162. Commercial preservation and marking shall be inspected for conformance to MIL-STD-1188.

5. PACKAGING

5.1 Preservation, packing, and marking. Preservation, packing, and marking shall be Level A, or Commercial as specified (see 6.2).

5.1.1 Level A. Level A preservation, packing, and marking shall be in accordance with requirements for Type II of MIL-STD-162.

5.1.2 Commercial. Commercial preservation, packing, and marking shall be in accordance with MIL-STD-1188.

6. NOTES

6.1 Intended use. The electronically guided stock selector truck covered by the specification is intended for use in warehouses with narrow aisles and high bins, shelves, and racks.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Time frame required for submission of the first article truck (see 3.2).
(c) When the Government will conduct any or all of the first article truck examination and tests. When the Government will conduct some but not all of the preproduction examination and tests, the contracting officer should specify which examination and and tests will be conducted by the Government and which examination and tests shall be conducted by the contractor (see 3.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

(d) When plating is not required (see 3.3.1).
(e) Quantity of converter-transmitters required (see 3.6.6).
(f) Number of linear feet of guide wire required (see 3.6.7).
(g) When batteries shall not be furnished by the contractor (see 3.7.3).
(h) When overhead guard is not required (see 3.8.2.2).
(i) When mast light is not required (see 3.10.2).
(j) When a storage and supply compartment is required (see 3.10.3).
(k) Vehicle other than specified (see 3.16).
(l) Degree of preservation and degree of packing required (see 5.1).

6.3 First article truck. Any changes or deviations of production trucks from the approved first article truck during production will be subject to the approval of the contracting officer. Approval of the first article truck will not relieve the contractor of his obligation to furnish trucks conforming to this specification.

6.3.1 Incident report. When the contractor conducts the tests specified herein, a written report within 24 hours of any incident of equipment malfunction or failure during the conduct of the test is required. As a minimum, the report shall describe components and parts affected, test and operating conditions, date of incident, hour meter reading, how detected, and description of incident.

6.4 Data requirements. The contracting officer should include requirements for such data as technical publications, instructional materials, illustrated parts lists, and contractor's maintenance and operation manual to be furnished with each truck. When a fail-safe hydraulic system is provided, manuals shall include a method for system verification by the operator and troubleshooting/repair procedures by maintenance personnel.

6.5 Provisioning. The contracting officer should include provisioning requirements for repair parts and maintenance tools as necessary (including any special tools), and instructions regarding shipment of trucks.

6.6 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the specification (see 3.3).

Custodians:
Army - ME
Navy - SA
Air Force - 99

Preparing activity:
Army - ME

Project 3930-0478

Review activity:
DLA - CS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

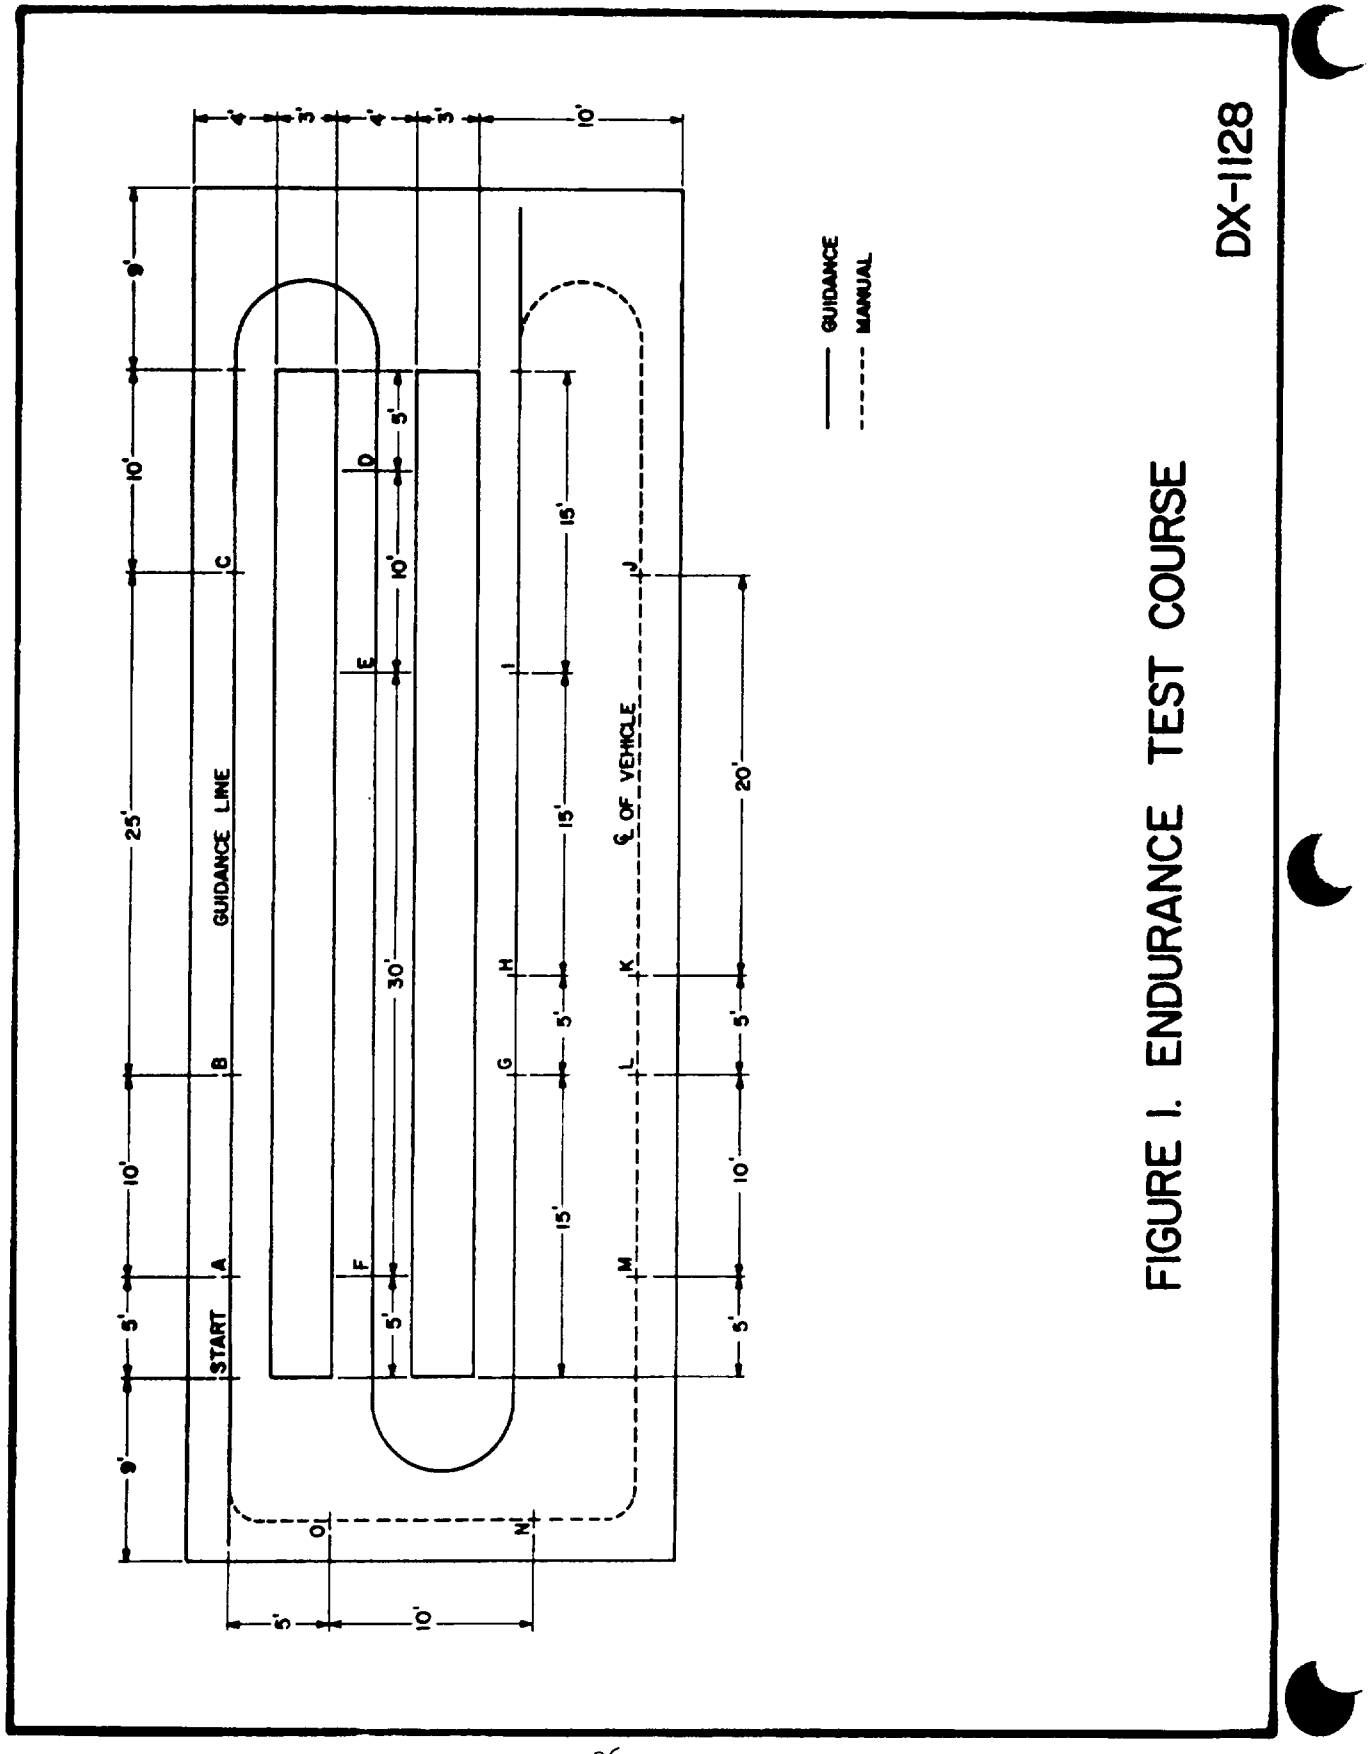


FIGURE 1. ENDURANCE TEST COURSE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers' vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE: MIL-T-52639A Truck, Stock Selector: Electronically and Manually Guided, 1,000 Pound Capacity

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

FOLD

MERADCOM
DRDME-DS
Ft. Belvoir, VA 22060

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

U.S.MAIL

Commander
US Army Mobility Equipment Research and
Development Command
ATTN: DRDME-DS
Ft. Belvoir, VA 22060

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.