MIL-W-52624A(ME)
31 August 1972
SUPERSEDING
MIL-W-52624(ME)
19 August 1968

MILITARY SPECIFICATION

WATER PURIFICATION UNIT,

AND WATER PURIFICATION EQUIPMENT SET, 600 GPH;

PACKAGING OF

1. SCOPE

1.1 This specification covers the requirements for materials, methods, and procedures for the preservation, packaging, packing and marking of the 600 gph water purification units (both types I and II of MIL-W-52116) and the 600 gph water purification equipment set.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

FF-N-105	- Nails, Brads, Staples and Spikes: Wire, Cut and Wrought.
NN-P-530	- Plywood, Flat-Panel.
QQ-S-781	- Strapping, Steel, Flat and Seals.
TT-P-664	- Primer Coating, Synthetic, Rust-Inhibiting, Lacquer-Resisting.
UU-S-48	- Sacks, Shipping, Paper.
PPP-B-636	- Boxes, Shipping, Fiberboard.
PPP-B-1055	- Barrier Material, Waterproofed, Flexible.

FSC 4610

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

PPP-C-843	- Cushioning Material, Cellulosic.
PPP-P-40	- Packaging and Packing of Hand Tools.
PPP-T-60	- Tape: Packaging, Waterproof.
PPP-T-76	- Tape, Pressure-Sensitive Adhesive Paper, (for Carton Sealing).

Military

MIL-C-104	- Crates, Wood; Lumber and Plywood Sheathed, Nailed and Bolted.
MIL-P-116	- Preservation, Methods of.
MIL-B-121	- Barrier Material, Greaseproofed, Waterproofed, Flexible.
MIL-P-130	- Paper, Wrapping, Laminated and Creped.
MIL-B-131	- Barrier Material, Water Vaporproof, Flexible, Heat-Sealable.
MIL-P-10603	- Pumps and Pumping Units, Centrifugal, Power-Driven, for Water, Packaging of.
MIL-T-14398	- Tanks, Fabric, Collapsible: Water, Nylon, Rubber-Coated.
MIL-E-16298	- Electric Machines Having Rotating Parts and Associated Repair Parts: Packaging of.
MIL-L-21260	- Lubricating Oil, Internal Combustion Engine, Preservative and Break-In.
MIL-C-46842	- Cushioning Material, Unicellular Polyethylene Foam (For Packaging Purposes).
MIL-G-52367	- Generator Sets, Gasoline-Engine-Driven, 3.0 KW, Alternating-Current, Air-Cooled, Portable, Tubular-Frame, Skid-Shock-Mounted.

STANDARDS

Military

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-281	- Automobiles, Trucks, Truck-Tractors, Trailers and Trailer-Dollies; Preservation and Packaging of.
MIL-STD-1186	- Cushioning, Anchoring, Bracing, Blocking, and Waterproofing; with Appropriate Test Methods.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, ATTN: Tariff Publishing Officer, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., ATTN: Tariff Order Section, 1616 P Street, NW, Washington, DC 20036.)

U.S. DEPARTMENT OF COMMERCE

Voluntary Product Standard PS-51 - Hardwood and Decorative Plywood.
Products Standard PS-1 - Softwood, Plywood; Construction and Industrial.

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, DC 20402.)

3. REQUIREMENTS

3.1 Preproduction pack. The supplier shall furnish a preproduction pack for examination within the time frame specified (see 6.2), to prove prior to starting production packaging and packing that the applied preservation, packaging, packing, and marking comply with the requirements of this specification. Examination shall be as specified in section 4 and shall be subject to surveillance and approval by the Government (see 6.3).

3.2 Materials. Materials shall be as specified herein and in the applicable specifications. Materials not specified shall be selected by the supplier and shall be subject to all provisions of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

3.3 Preservation and packaging. Preservation and packaging shall be level A, B, or C as specified (see 6.2).

3.3.1 Level A.

3.3.1.1 Preservatives. Preservatives specified herein shall conform to the applicable specifications listed in and shall be applied in accordance with MIL-P-116. CAUTION: Contact preservatives shall not be applied to any surface, other than the interior of the pump, which will come in contact with chemical solutions, slurries, or water, except waste water.

3.3.1.2 Water purification units.

3.3.1.2.1 Actuating and hardware items. Surfaces of bolts, nuts, linkages, pins, grease fittings, levers, adjusting rods, clamps, capscrews, and couplings shall be coated with type P-1 preservative. Surfaces of actuating and hardware items requiring a contact preservative not definitely specified herein shall be coated with type P-1 preservative.

3.3.1.2.2 Belts and pulleys. Belts shall be removed or released from tension. Unpainted pulleys (unless made of corrosion-resistant material) shall be coated with primer conforming to TT-P-664. Removed belts shall be secured to one of the pulleys from which it was removed.

3.3.1.2.3 Electric motors. Electric motors shall be preserved in accordance with MIL-E-16298, level A, by the alternate method as specified therein for assembled machines, except for the solution feeder assembly motor (see 3.3.1.2.4).

3.3.1.2.4 Solution feeder assembly. The solution feeder assembly gear-reduction mechanism and motor housing shall be drained and filled to the operating level with oil conforming to MIL-L-21260, type I, grade 10. The gears shall be actuated to assure coating of all parts and surfaces within the housing.

3.3.1.2.5 Cable assemblies and tubing. The unconnected cable assemblies and tubing shall be coiled to a minimum coil. The coils shall be secured with equally spaced wraps of cotton tape or twine and secured to the nearest bracket or structural member.

3.3.1.2.6 Gate valves and drain cocks. Gate valves and drain cocks shall be left open and openings shall be covered with tape conforming to PPP-T-60, type IV.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:09Z
Check the source to verify that this is the current version before use.

3.3.1.2.7 Filter elements. Each filter element shall be packaged in a close-fitting box conforming to PPP-B-636, grade not less than W6c, RSC, end opening.

3.3.1.2.8 Sleeves. A flat separator pad of fiberboard or similar material shall be inserted inside each sleeve. The pad shall be not less than 1/2 inch thick by 4-3/8 inches wide and 13 inches long. Each sleeve shall be wrapped in Kraft paper and inserted into a heat-sealable bag fabricated from material conforming to MIL-B-131, class 2.

3.3.1.2.9 Pump. The pump shall be preserved in accordance with MIL-P-10603, level A. The cord shall be wound and secured to the pump frame. The pump cover shall be preserved in accordance with MIL-P-116, method IC-1, and secured to the pump.

3.3.1.2.10 Accessories. Blind flanges, pipe caps, and capscrews shall be preserved and packaged in accordance with MIL-P-116, method IC-1. Hose clamps shall be secured with cotton tape or wire ties. Preservation or packaging for the paddle and **metal pails shall not be required.**

3.3.1.2.11 Repair parts. The preservative application criteria and applicable methods of preservation of MIL-P-116 shall be used to preserve repair parts.

3.3.1.2.12 Technical publications. Technical publications shall be preserved in accordance with MIL-P-116, method IC-1.

3.3.1.2.13 Maintenance and operational tools. The grease gun, ball peen hammer, knife, pliers, screwdrivers, and other maintenance and operational tools shall be preserved and packaged in accordance with PPP-P-40, level A.

3.3.1.2.14 Ground rods. The copper wire connected to the ground rod shall be wound around the ground rod and secured to the rod with tape, twine or wire.

3.3.1.2.15 Intermediate and consolidated packaging. Filter elements, packaged as specified herein, shall be consolidated packaged in the chemical box. The sleeves, packaged as specified herein, shall be intermediate packaged in quantities of four in close-fitting boxes conforming to PPP-B-636, W5c, style optional and consolidated packaged in the chemical box. The paddle shall be consolidated packaged in the tool chest. The blind flanges, pipe caps, hexagon head capscrews, and hose clamps shall be consolidated packaged in the accessory box. Technical publications shall be consolidated packaged in the chemical box. Maintenance tools, preserved and packaged as

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

specified herein, shall be consolidated packaged in the chemical box along with the ground rods and metal pails. Repair parts, preserved and packaged as specified, shall be consolidated packaged in quantities not to exceed the weight limitation in boxes conforming to PPP-B-636, V or W fiberboard, as applicable, style optional. If needed, items of a suitable size may be packed within one or both metal pails; covers shall remain off with the pails sitting on top of the covers.

3.3.1.2.16 Trailer. The trailer shall be preserved in accordance with MIL-STD-281, level A (mobile). The interior surfaces of the brake drums shall be coated with primer as specified therein.

3.3.1.3 Water purification equipment set.

3.3.1.3.1 Water purification unit. The water purification unit including trailer shall be preserved, packaged, and intermediate (or consolidated) packaged as specified in 3.3.1.2.

3.3.1.3.2 Adapters and bushings. Each adapter and bushing shall be wrapped and nested where possible with paper conforming to MIL-P-130, type II or III; or barrier material conforming to PPP-B-1055, class B-2 or MIL-B-121, type I, grade A, class 2. The paper or barrier material shall be secured with tape conforming to PPP-T-76.

3.3.1.3.3 Cable. The power cable shall be coiled in a minimum coil, not less than 10 times the cable diameter. The coil shall be secured with cotton tape or twine.

3.3.1.3.4 Calcium hypochlorite. The calcium hypochlorite shall be packaged in quantities of twelve 3-3/4-pound containers in a fiberboard box conforming to PPP-B-636, style RSC, type CF, class domestic, variety SW, grade 275.

3.3.1.3.5 Comparator. The components of the comparator shall be placed in the case provided. The case containing the components shall be packaged in a close-fitting container conforming to PPP-B-636, W6c, style optional. The box shall be waterproof sealed with tape in accordance with the appendix to the box specification.

3.3.1.3.6 Generator set. The generator set shall be preserved and packaged in accordance with MIL-G-52367, level A.

3.3.1.3.7 Test solutions. The plastic bottles of ortho-tolidine, wide range pH and sodium arsenite solutions with sealed caps shall require no further packaging.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:09Z
Check the source to verify that this is the currentversion before use.

3.3.1.3.8 Hoses and hose assemblies. The ends of hoses and hose assemblies shall be covered with barrier material conforming to PPP-B-1055, class B-2 or MIL-B-121, type I, grade A, class 2. The barrier material shall be secured with tape conforming to PPP-T-76. The cotton hoses shall be coiled in a minimum coil and secured with a tie of cotton tape or twine. When cotton hoses are furnished in a vendor's carton, no further packaging shall be required.

3.3.1.3.9 Jack. Unprotected metal surfaces of the jack and handle shall be coated with type P-7 preservative. The handle shall be folded to the minimum dimension. The jack and handle shall be wrapped with barrier material conforming to MIL-B-121, type I, grade A, class 2. The barrier material shall be secured with tape conforming to PPP-T-76.

3.3.1.3.10 Key set. The keys shall be placed in the case provided and the case containing the keys shall be preserved in accordance with MIL-P-116, method IC-1.

3.3.1.3.11 Extension light. The light shall be coiled or hanked to occupy minimum space and secured with twine.

3.3.1.3.12 Measures. The measures shall be nested and wrapped with paper conforming to MIL-P-130, type II or III; or barrier material conforming to PPP-B-1055, class B-2, or MIL-B-121, type I, grade A, class 2. The paper or barrier material shall be secured with tape conforming to PPP-T-76.

3.3.1.3.13 Nozzle. The nozzle with nipple and bushing removed shall require no preservation or packaging.

3.3.1.3.14 Pump. The pump shall be preserved in accordance with MIL-P-10603, level A.

3.3.1.3.15 Suction strainers. The suction strainers shall be wrapped with paper conforming to MIL-P-130, type II or III; or barrier material conforming to PPP-B-1055, class B-2 or MIL-B-121, type I, grade A, class 2. The paper or barrier material shall be secured with tape conforming to PPP-T-76.

3.3.1.3.16 Gate valve. The gate valve shall be packaged in a close-fitting box conforming to PPP-B-636, type CF, class domestic, variety SW, grade 125, style optional.

3.3.1.3.17 Wrenches. The open-end wrenches, pipe wrenches, and spanner wrenches shall be preserved and packaged in accordance with PPP-P-40, level A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

3.3.1.3.18 Consolidated packaging. Unless otherwise specified (see 6.2), the following items shall be consolidated packaged in the box or chest specified herein:

Accessories Box	Chemical Box	Tool Chest
+Blind flanges	Color comparator	Grease gun
+Pipe caps	+Filters	+Hammer
+Cap screws	+Filter sleeves	+Knife
+Hose clamps	+Pails, Steel	+Pliers
Adapters	Technical publications	+Screwdrivers
Bushing		Jack and handle
Nozzle (w/nipple and bushing)		Key set
Gate valve		Wrenches, open-end
Extension light		Wrenches, pipe
Suction strainers		Wrenches, spanner
Measures (nested)		+Paddle
Light bulb		+Ground rods w/wire
Test solutions		

Notes: (1) + Indicates a component of the unit.
(2) Accessories box loading plan plate to be used in packaging of items.
(3) Items may be placed inside pails in chemical box.

The 1-1/4-inch rubber, 1-1/2-inch rubber, 1-1/2-inch cotton and 1-inch polyester hoses shall be consolidated packaged in the two hose compartments of the trailer. The 1-inch rubber hose and the power cable shall be consolidated packaged in the erdlator. Consolidated packaging requirements specified herein have proven adequate to contain all accessories and components. However, when the configuration of these items result in dimensional changes, the supplier may relocate such items in any available space within the confines of the trailer, provided that equivalent protection is afforded the item. Relocation of any item shall be subject to the approval of the contracting officer.

3.3.1.3.19 Tanks. The tanks shall be preserved, packaged, and packed in accordance with MIL-T-14398.

3.3.2 Level B.

3.3.2.1 Water purification units. Each water purification unit shall be preserved as specified for level A, with the following exceptions.

3.3.2.1.1 Trailer. The trailer shall be preserved in accordance with MIL-STD-281, level B (mobile).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

3.3.2.2 Water purification equipment set. Each water purification equipment set shall be preserved, packaged, and consolidated packaged as specified for level A, with the following exceptions.

3.3.2.2.1 Water purification unit. The water purification unit, including the trailer, shall be preserved, packaged, intermediate and consolidated packaged in accordance with 3.3.2.1 and 3.3.2.1.1.

3.3.2.2.2 Generator set. The generator set shall be preserved and packaged in accordance with MIL-G-52367, level B.

3.3.3 Level C.

3.3.3.1 Water purification unit and water purification equipment set. Preservation and packaging of each water purification unit or water purification equipment set shall be limited to that protection necessary to provide protection against deterioration and damage from the supplier to the initial destination.

3.4 Packing. Packing shall be level A or C as specified (see 6.2), and shall conform to figures 1 through 8, as applicable.

3.4.1 Level A.

3.4.1.1 Blocking, bracing, and cushioning. Blocking, bracing, and cushioning shall be provided as required to prevent or control movement of packed items and components. Blocking, bracing, and cushioning shall conform to MIL-STD-1186 or as specified herein.

3.4.1.2 Strapping. Where items are secured with steel strapping, the strapping shall conform to QQ-S-781, type I or IV, class B, size 3/4 inch by .035 inch unless otherwise indicated.

3.4.1.3 Water purification units.

(a) Loosen clamp holding the flexible coupling of the effluent launder drain.

(b) Wood blocking, nominal 2-inch by 4-inch size, or polyethylene foam conforming to MIL-C-46842 of 3-inch width and 1-inch thickness, nominal density, shall be placed between the bridge rails and launder ring. Raise the level of the effluent launder ring with the leveling screws until the blocking is held securely against the bridge rails. Strap the launder ring to the bridge rails at four points of contact.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

(c) Secure low-water-level float assembly with a wood block so that the assembly does not rest on the sensitive switch. Pack cushioning material conforming to PPP-C-843, type I, class B around the float to prevent movement.
(d) Lever-type handles of quick-opening gate valves shall be secured with tape conforming to PPP-T-60, type IV.
(e) Secure the accessory box in the bracket provided.
(f) Secure the chemical box in the bracket provided.
(g) The potable raw water pump shall be secured in the location provided on the unit by the straps provided.
(h) Exposed threads of unconnected couplings shall be protected with a wrap of tape conforming to PPP-T-60, type IV.
(i) The tarpaulin, boxed, folded, or rolled, shall be secured in any available space within the confines of the trailer area. Securement shall be with steel strapping of a minimum size of 3/8 inch by 0.015 inch, class B, conforming to requirements of QQ-S-781. Edge protectors shall be used when tarpaulin is not boxed.
(j) The trailer shall be covered with a plywood cap as shown on figures 4 and 5 or 7 and 8 as applicable.

3.4.1.4 Water purification equipment set.

3.4.1.4.1 Accessory box. The accessory box containing the preserved and packaged items shall be secured in the bracket provided.

3.4.1.4.2 Chemical box. The chemical box containing the preserved and packaged items shall be secured in the brackets provided.

3.4.1.4.3 Pump. The gasoline engine driven pump shall be packed in accordance with MIL-P-10603, level A, and shipped in a separate container along with the complete water purification set.

3.4.1.4.4 Generator. The generator set shall be packed in accordance with MIL-C-52367, level A. The generator set shall be shipped separately but to accompany the other set components.

3.4.1.4.5 Water purification unit. The water purification unit shall be packed as specified for level A for the unit (see 3.4.1.3).

3.4.1.4.6 Calcium hypochlorite. The calcium hypochlorite shall be packed in accordance with figure 1.

3.4.1.4.7 Filter aids and limestone. The filter aids and limestone shall be packed in sacks conforming to UU-S-48, and the sacks packed as shown in figure 2.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:09Z
Check the source to verify that this is the currentversion before use.

3.4.1.4.8 Rubber pails. The pails shall be inverted over the raw water pump frame and secured by strapping the pail cover in position with the web strapping as provided.

3.4.1.4.9 Repair parts and maintenance tools. Any additional repair parts and maintenance tools shall be secured in any available space within the confines of the trailer body area.

3.4.1.4.10 Tarpaulin. The tarpaulin shall be secured on top of the hypochlorite box by strapping it to the filter unit.

3.4.1.4.11 Activated carbon and ferric chloride. The activated carbon and ferric chloride shall be secured in the front area of the trailer as shown on figure 3 or figure 6 as applicable. Securement by means of steel strapping of a minimum size 3/8 inch by 0.015 inch, class B, conforming to QQ-S-781, shall be accomplished by encircling each container and the stakes of the side and end racks with a single strap.

3.4.1.4.12 Trailer loading. All components preserved, packaged, and packed as specified herein shall be loaded on the trailer in accordance with figure 3 or figure 6 as applicable.

3.4.1.4.13 Trailer cap. The trailer shall be covered with a plywood cap as shown on figures 4 and 5 or 7 and 8 as applicable.

3.4.2 Level C.

3.4.2.1 Water purification unit. Each complete water purification unit, components, repair parts, tools, and technical publications shall be packed to insure carrier acceptance and safe delivery to destination at lowest ratings in compliance with Uniform Freight Classification rules or National Motor Freight Classification rules.

3.4.2.2 Water purification equipment sets. Each complete water purification equipment set shall be packed to insure carrier acceptance and safe delivery to destination at lowest ratings in compliance with Uniform Freight Classification rules or National Motor Freight Classification rules.

3.5 Depreservation guide. Two depreservation guides shall be prepared. Each guide shall be placed in a waterproof envelope marked "Depreservation Guide". One guide shall be placed in a conspicuous location on the water purification unit or the water purification equipment set. The second guide shall be placed in the chemical box. Unless otherwise specified (see 6.2), DA Form 2258 - "Depreservation Guide for Vehicles and Equipment" shall be used (see 6.4).

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:09Z
Check the source to verify that this is the currentversion before use.

3.6 Marking. Marking shall be in accordance with MIL-STD-129.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Material inspection. The supplier is responsible for insuring that supplies and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards.

4.2 Classification of inspection. Inspection shall be classified as follows:

(a) Preproduction pack inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).

4.3 Preproduction pack inspection.

4.3.1 Examination. The preproduction pack shall be examined for the defects specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Unit of product. For the purpose of inspection, a completed pack of any one level prepared for shipment shall be considered a unit of product.

4.4.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.4.3 Examination. Samples selected in accordance with 4.4.2 shall be examined for the defects marked "X" for the applicable level in table I. Acceptable quality level (AQL) shall be 2.5 percent defective.

4.5 Inspection procedure.

4.5.1 Examination. Packs shall be examined for the defects listed in table I.

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:09Z
Check the source to verify that this is the current version before use.

Table I. Classification of Defects

Defect	Level A	Level B	Level C
101. Materials, methods, or containers not as specified for preservation, packaging, intermediate packaging, or packing. Each incorrect material, method, or container shall constitute one defect.	X	X	-
102. Preservatives applied to surfaces which will come in contact with chemical solutions and water, except waste water, except as specified for pump interiors.	X	X	-
103. Belts not removed or released from tension.	X	X	-
104. Solution feeder assembly not preserved and tagged as specified.	X	X	-
105. Electric motors not preserved as specified.	X	X	-
106. Float switch rod and float not secured.	X	X	-
107. Gate valves and drain cocks not left open and openings not taped.	X	X	-
108. Filter elements not preserved and intermediate packaged as specified.	X	X	-
109. Sleeves not packaged and intermediate packaged as specified.	X	X	-
110. Pumps not preserved as specified.	X	X	-
111. Intermediate packaging not as specified.	X	X	-
112. Trailer not preserved as specified.	X	X	-
113. Trailer brakes not coated with primer.	X	-	-
114. Calcium hypochlorite not packaged as specified.	X	X	-
115. Pump cover not preserved as specified.	X	X	-
116. Generator set not preserved as specified.	X	X	-
117. Ends of hoses and hose assemblies not covered as specified, except when boxed.	X	X	-
118. Components not wrapped in barrier material and secured with tape as specified.	X	X	-
119. Tanks not preserved and packed as specified.	X	X	-
120. Effluent launder not strapped to rails and leveling rods not secured as specified.	X	X	-
121. Filter aids (diatomaceous earth or pearlite) not in level A bags as specified.	X	X	-
122. Activated carbon not placed and strapped as specified.	X	X	-
123. Ferric chloride not placed and strapped as specified.	X	X	-
124. Actuating and hardware items not preserved as specified.	X	X	-
125. Accessories, repair parts, technical publications, or maintenance and operational tools not preserved and packaged as specified.	X	X	-

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:09Z
Check the source to verify that this is the current version before use.

126. Components not blocked, braced, anchored, or arranged within the trailer as specified.	X	X	-
127. Depreservation guide not prepared and attached as specified.	X	X	-
128. Marking illegible, incorrect, incomplete, or missing.	X	X	X
129. Filter aids (diatomaceous earth or pearlite) and limestone not packed in accordance with figure 2.	X	-	-

5. PREPARATION FOR DELIVERY

(Not applicable to this specification.)

6. NOTES

6.1 Intended use. This specification is intended to be used for direct reference in contracts or orders and in section 5 of commodity specifications for the preservation, packaging, packing, and marking of 600 gph cargo trailer mounted, type I and trailing arm trailer mounted, type II water purification units; and 600 gph trailing arm trailer mounted, type II water purification equipment sets.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Time frame required for submission of preproduction pack (see 3.1).
(c) Level of preservation and packaging and level of packing required (see 3.3 and 3.4). Level B preservation and packaging is intended to provide limited but economical protection and should be specified only when it is determined the water purification units or water purification equipment sets will be held in covered storage.
(d) When the items shall be packaged other than as specified (see 3.3.1.3.18).
(e) When other than DA Form 2258 is required (see 3.5).

6.3 Preproduction pack. Any changes or deviations of production packs from the approved preproduction pack will be subject to the approval of the contracting officer. Approval of the preproduction pack will not relieve the supplier of his obligation to preserve, package, pack, and mark the water purification units and water purification equipment sets in accordance with this specification.

6.4 DA Form 2258. The contracting officer should arrange to furnish DA Form 2258 when requested by the supplier.

Custodian:


Army - ME

Preparing activity:

Army - ME

Project No. 4610-A052

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:09Z
Check the source to verify that this is the current version before use.

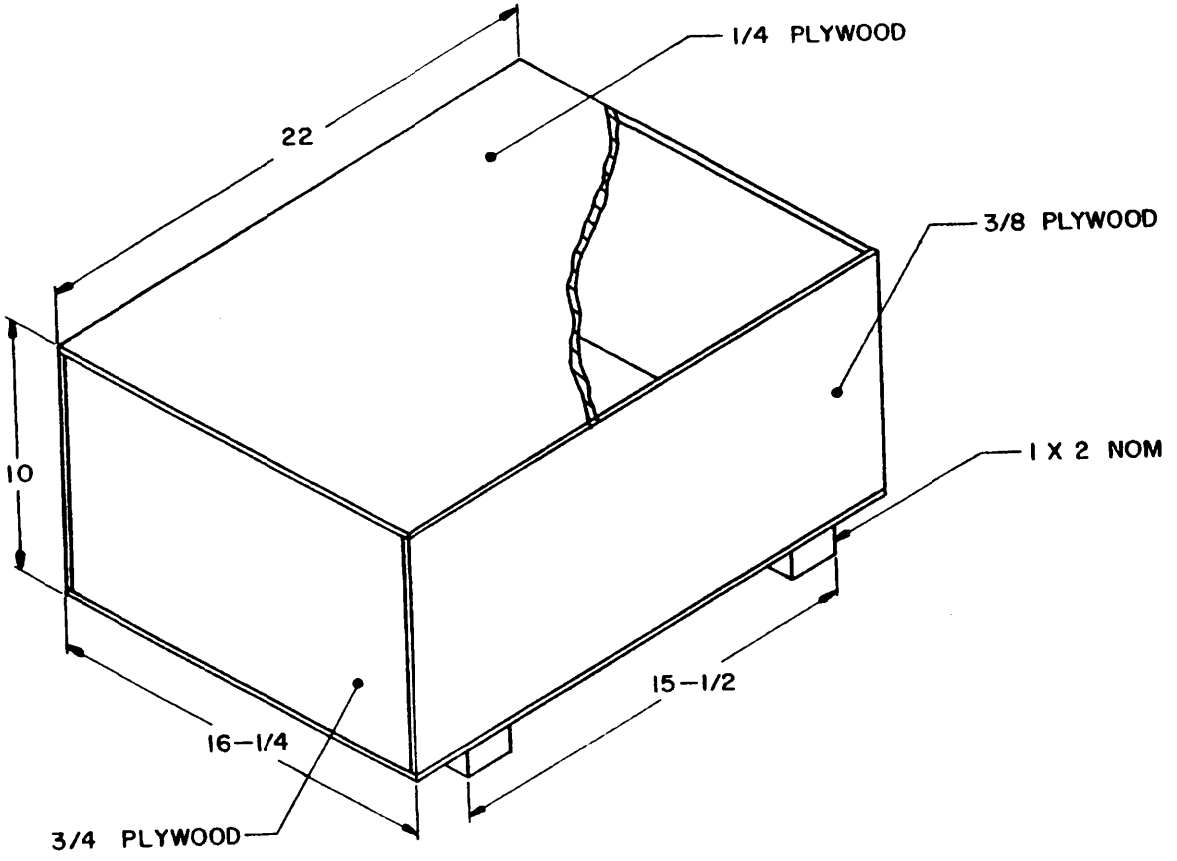

CONTAINER FOR 12-3-3/4 LB. BOTTLES CALCIUM HYPOCHLORITE


NOTES:

1. PLYWOOD SHALL CONFORM TO REQUIREMENTS OF NN-P-530, GROUP A (PS-51, TYPE I, GRADE 3-4) OR GROUP B (PS-1, STANDARD SHEATHING, WITH EXTERIOR GLUE).
2. NAILS, 6d CEMENT COATED, CONFORMING TO FF-N-105, TYPE II, STYLE 4, SHALL BE SPACED ON 5 INCH CENTERS, MINIMUM.

Figure 1. PACKING LEVEL A

X1678B

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

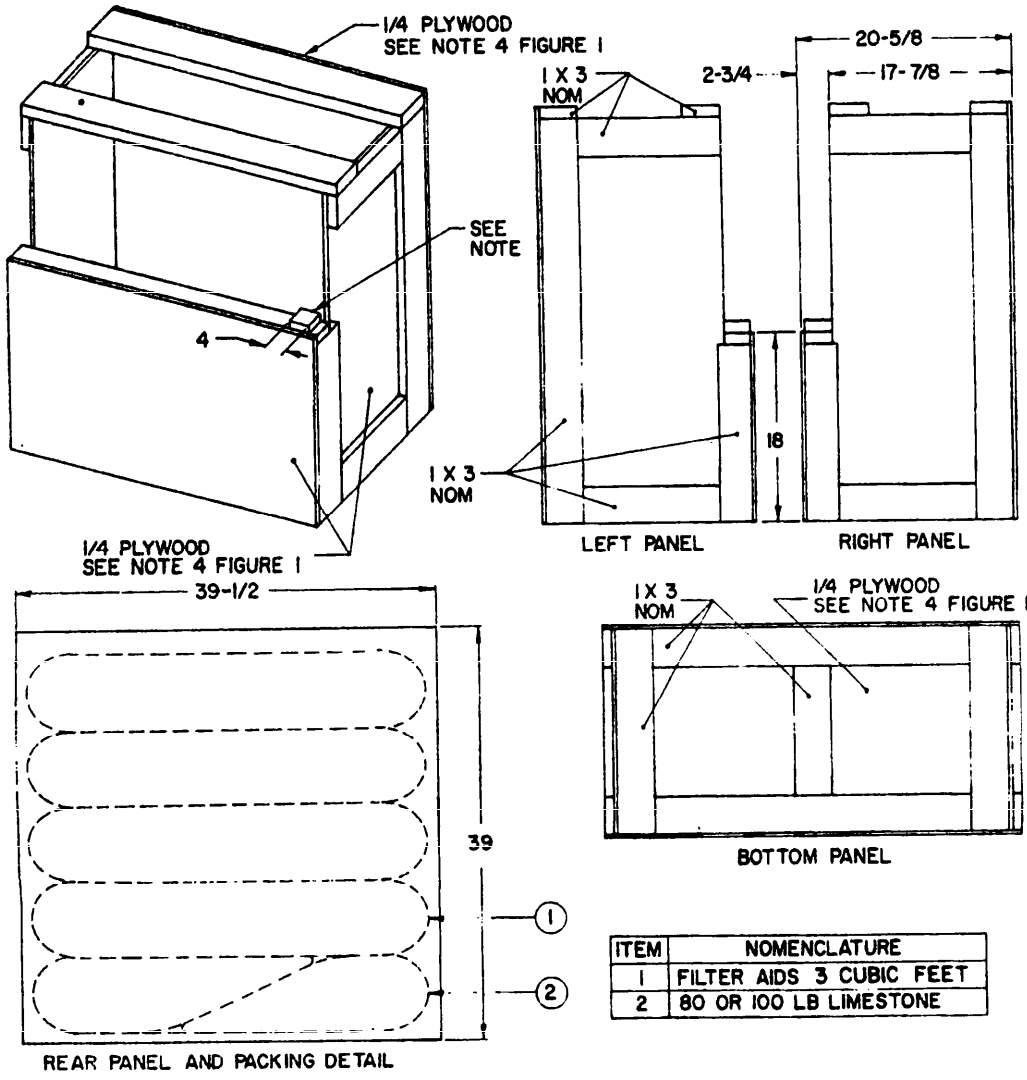


ITEM	NOMENCLATURE
1	FILTER AIDS 3 CUBIC FEET
2	80 OR 100 LB LIMESTONE

NOTE:
BLOCK, TO RESTRAIN TANK BOX, TO BE POSITIONED AND SECURED AFTER LOADING ON TRAILER.

Figure 2. PACKING LEVEL A.

X1679A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

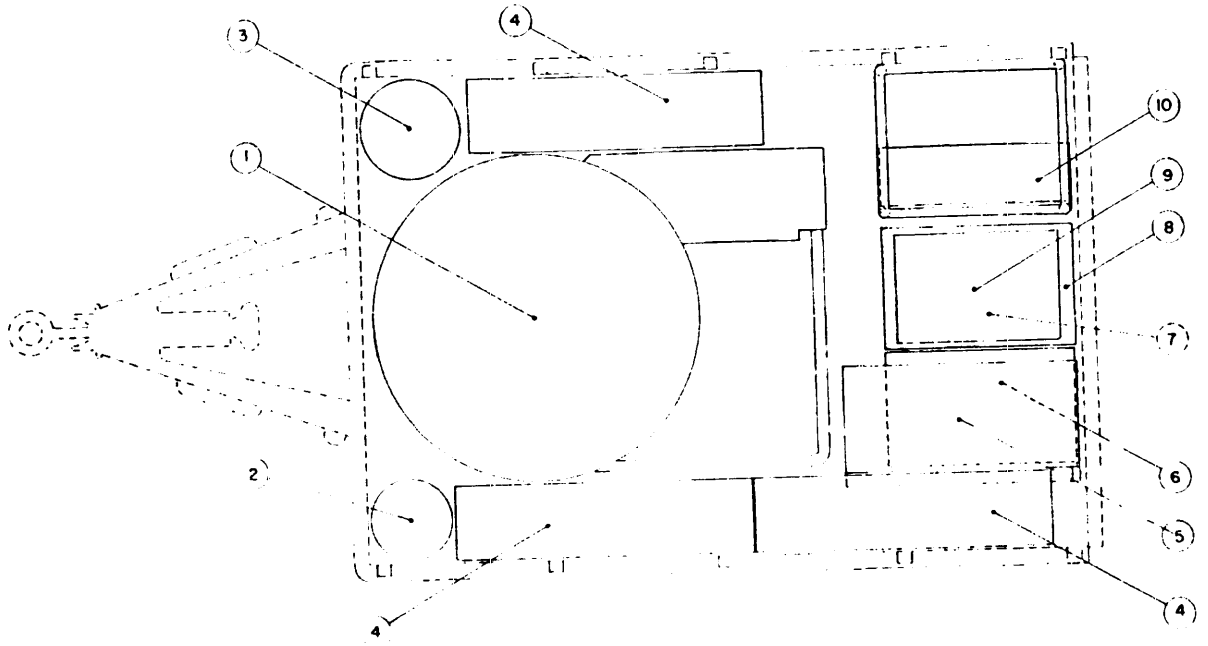

ITEM	NOMENCLATURE
1	ERDLATOR
2	ACTIVATED CARBON
3	FERRIC CHLORIDE
4	TANK
5	LIMESTONE & FILTER AIDS

ITEM	NOMENCLATURE
6	ACCESSORY BOX
7	CANVAS COVER (NOT SHOWN)
8	CHEMICAL BOX
9	CALCIUM HYPOCHLORITE
10	TOOL CHEST


NOTE:
TRAILER BOWS SHALL BE LOCATED IN THE LOWEST IN-USE POSITION (APPROX 60-INCHES ABOVE TRAILER FLOOR).

PLAN VIEW DROP AXLE TRAILER

Figure 3. PACKING, LEVEL A.

X1680A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

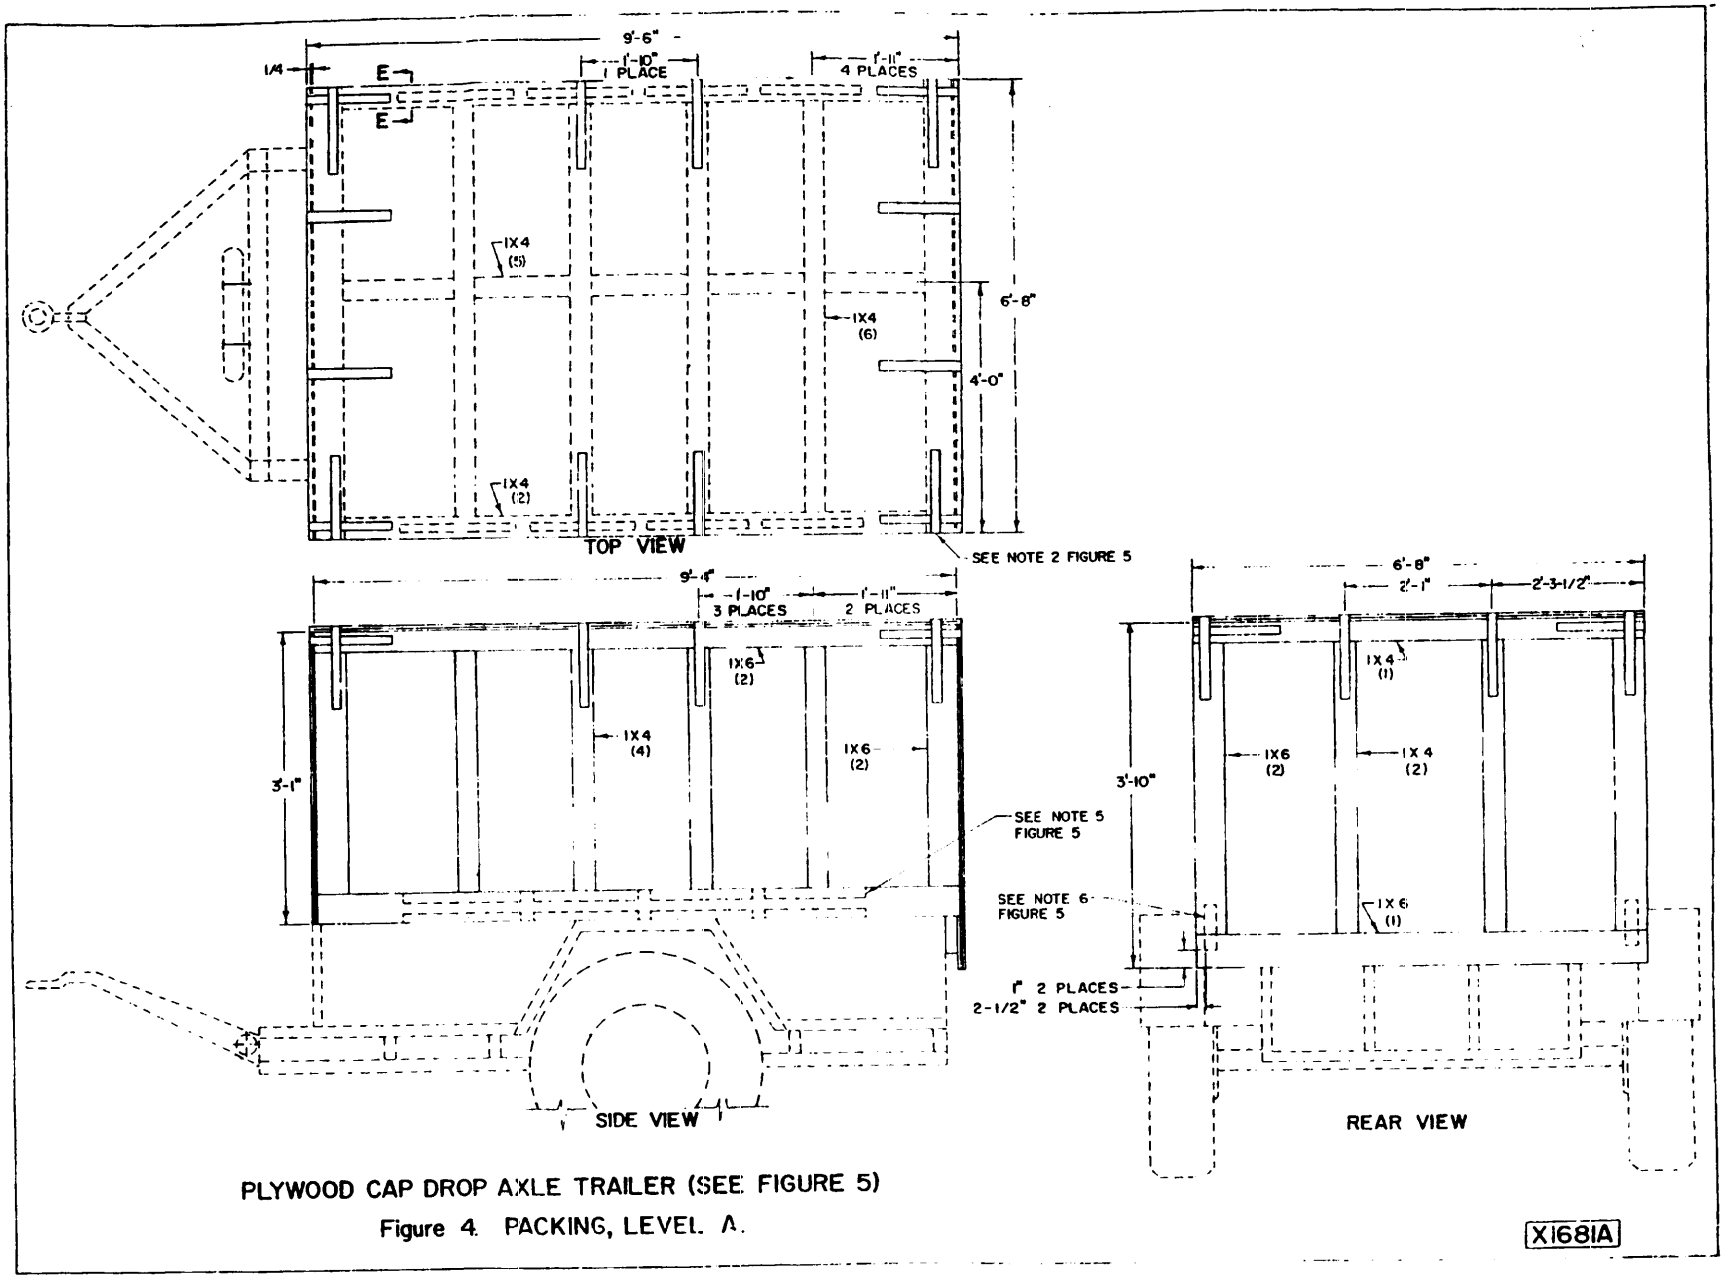


PLYWOOD CAP DROP AXLE TRAILER (SEE FIGURE 5)

Figure 4. PACKING, LEVEL A.

X168IA

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T04:09Z
Check the source to verify that this is the current version before use.

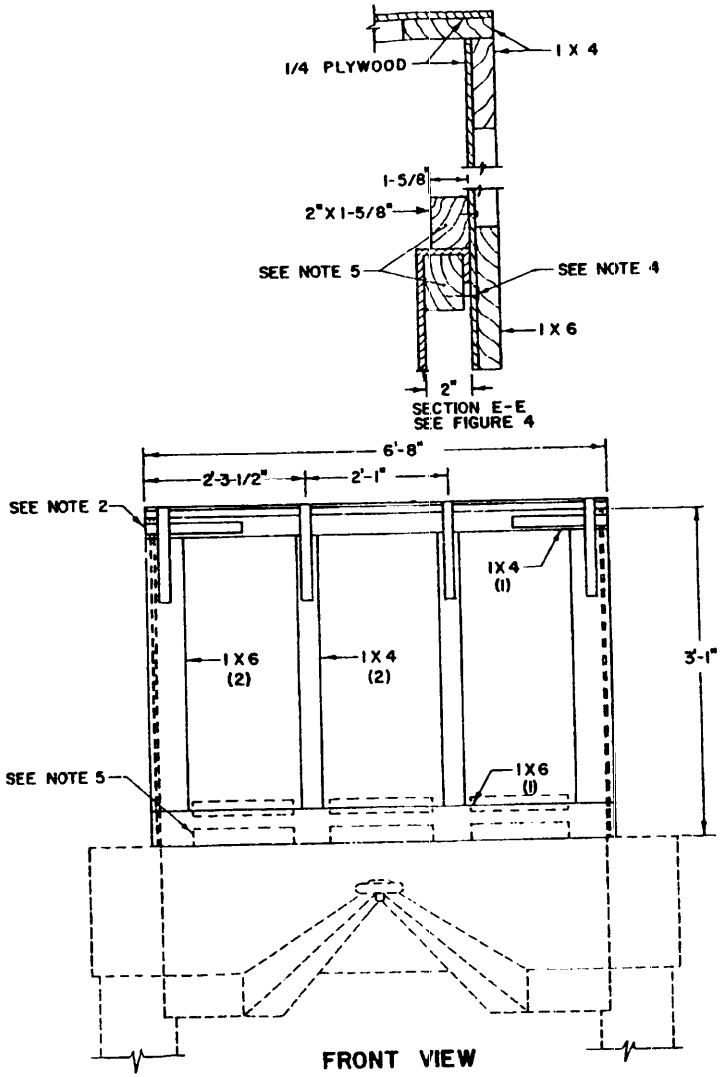

NOTES:


1. PLYWOOD SEE NOTE 4 FIGURE 1.
2. STRAPPING 1-1/4" X .035" (SPEC. QQ-S-781) TYPE II, CLASS B.
3. MODIFIED MIL-C-104 TYPE I, CLASS 2, SIDES, ENDS & TOP.
4. NAIL THRU PLYWOOD INTO BLOCKING.
5. 1-5/8"X 2" WOOD BLOCKING FITTED UNDER WALL RIM & CUT TO FIT BETWEEN WALL RIBS ALONG BOTH SIDES AND FRONT OF TRAILER.
6. 2" X 2" X 9" BLOCKING.
7. DIMENSIONS, AS GIVEN, ARE TYPICAL BUT MINOR MODIFICATIONS MAY BE REQUIRED TO CONFORM TO TRAILER SIZE AS FURNISHED.

PLYWOOD CAP DROP AXLE TRAILER

Figure 5. PACKING, LEVEL A.

X1682A

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T04:09Z
Check the source to verify that this is the current version before use.

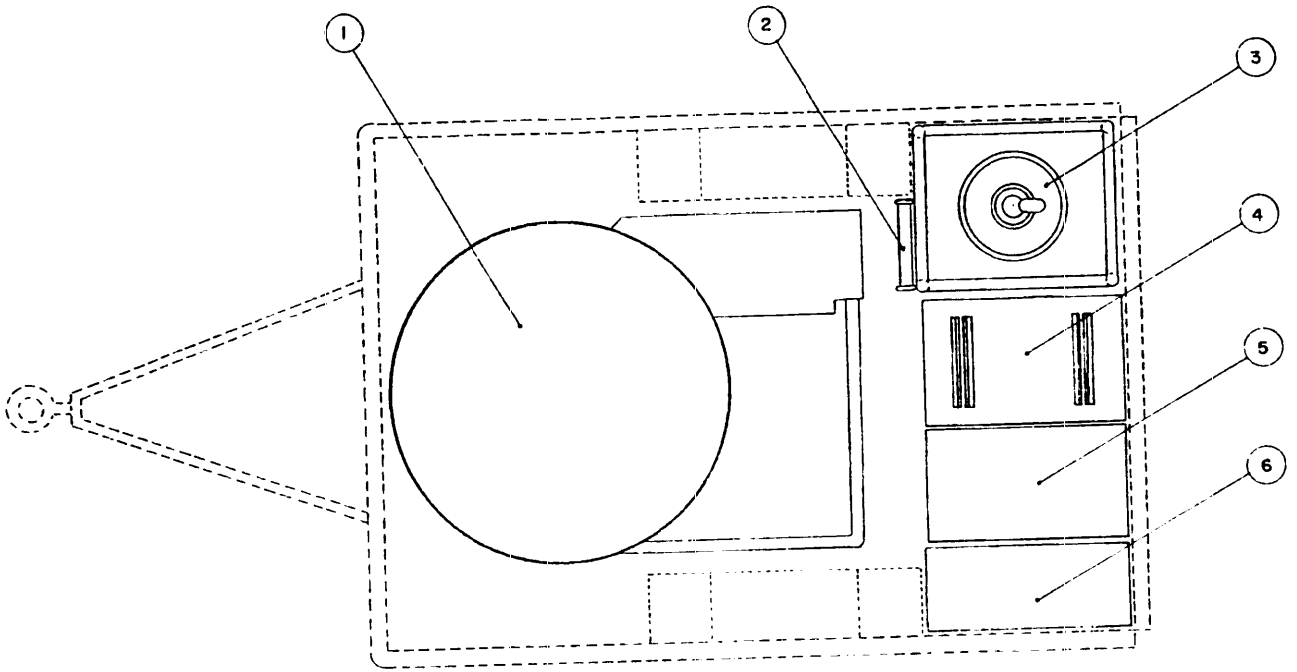

ITEM	NOMENCLATURE
1	ERDLATOR
2	LADDER
3	FILTER
4	CHEMICAL BOX
5	ACCESSORY BOX
6	TOOL CHEST


NOTE:
TRAILER BOWS SHALL BE LOCATED IN THE LOWEST IN-USE POSITION (APPROX. 60-INCHES ABOVE TRAILER FLOOR).

PLAN VIEW, M 105A2 TRAILER

Figure 6. PACKING, LEVEL A.

X1683A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

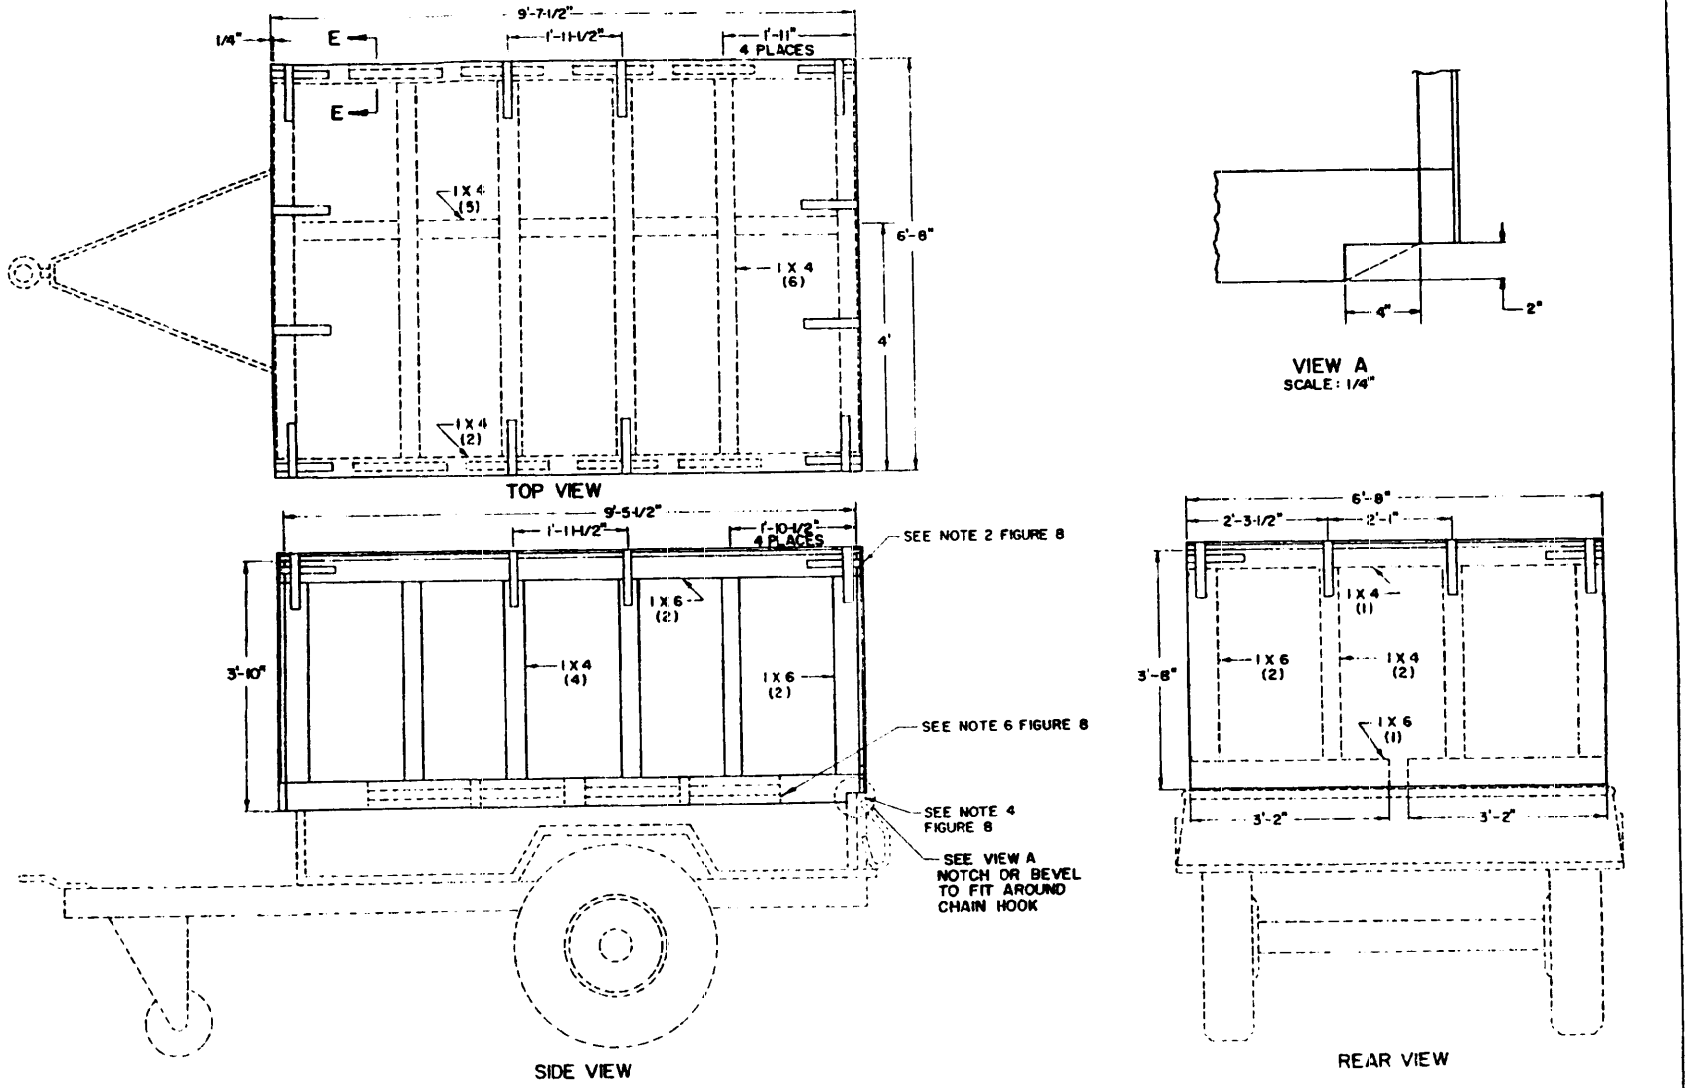


PLYWOOD CAP FOR M 105A2 TRAILER (SEE FIGURE 8)


Figure 7. PACKING, LEVEL A.

XI684A

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:09Z
Check the source to verify that this is the current version before use.

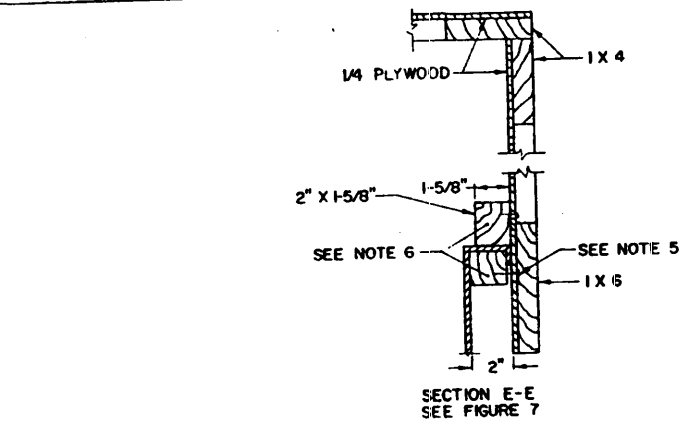

SECTION E-E
SEE FIGURE 7

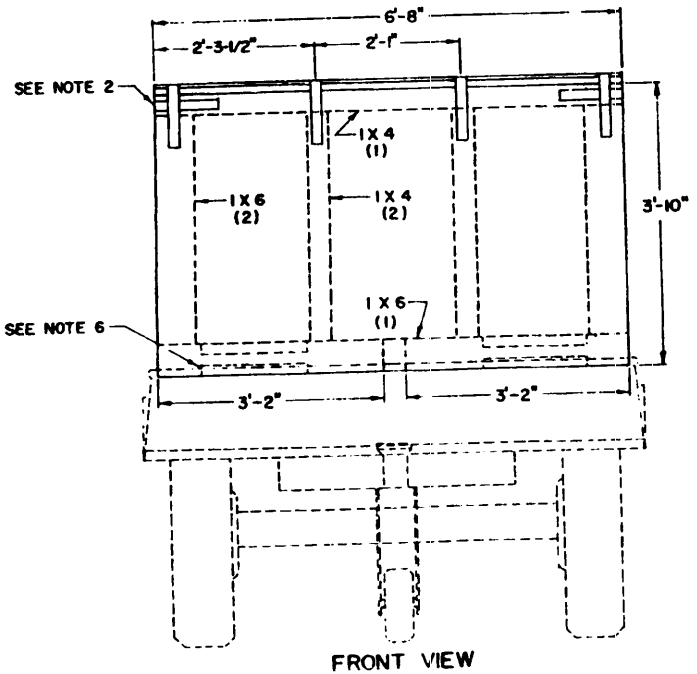

FRONT VIEW

NOTES:

1. PLYWOOD SEE NOTE 4 FIGURE 1.
2. STRAPPING 1-1/4" X .035" (SPEC. QQ-S-781) TYPE II, CLASS B.
3. MODIFIED MIL-C-104 TYPE I, CLASS 2, SIDES, ENDS & TOP.
4. CORNERS SQUARE CUT OR BEVELED AS REQUIRED.
5. NAIL THRU PLYWOOD INTO BLOCKING.
6. 1-5/8" X 2" WOOD BLOCKING FITTED UNDER WALL RIM & CUT TO FIT BETWEEN WALL RIBS ALONG BOTH SIDES AND FRONT OF TRAILER.
7. DIMENSIONS, AS GIVEN, ARE TYPICAL BUT MINOR MODIFICATIONS MAY BE REQUIRED TO CONFORM TO TRAILER SIZE AS FURNISHED.

PLYWOOD CAP M105A2 TRAILER

Figure 8. PACKING, LEVEL A.

X1685A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION MIL-W-52624A(ME) Water Purification Unit, & Water Purification Equipment Set, 600 GPH; Packaging of

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

23

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:09Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. A. ARMY MOBILITY EQUIPMENT COMMAND
RESEARCH, DEVELOPMENT AND ENGINEERING DIRECTORATE
ATTN: AMSME-RZD
FORT BELVOIR, VIRGINIA 22060

OFFICIAL BUSINESS

POSTAGE AND FEES PAID

DEPARTMENT OF THE ARMY
U. S. ARMY MOBILITY EQUIPMENT COMMAND
RESEARCH. DEVELOPMENT AND ENGINEERING DIRECTORATE
ATTN: AMSME-RZD
FORT BELVOIR, VIRGINIA 22060

FOLD

D—36.455—Ft Belv

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:09Z
Check the source to verify that this is the current version before use.