INCH-POUND
MIL-W-52624B
17 JULY 1989
SUPERSEDING
MIL-W-52624A
31 AUGUST 1972

MILITARY SPECIFICATION

WATER PURIFICATION UNIT, AND WATER PURIFICATION EQUIPMENT SET, 600 GPH; PACKAGING OF

This specification is approved for use within the Department of the AIR FORCE, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE.

1.1 This specification covers the requirements for materials, methods, and procedures for the preservation, packaging, packing and marking of the 600 gph water purification units (both types I and II of MIL-W-52116) and the 600 gph water purification equipment set.

2. APPLICABLE DOCUMENTS.

2.1 Government documents.

2.1.1 Specifications, and standards. The following specifications, and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

Federal

QQ-S-781	-Strapping, Steel, Flat and Seals
TT-P-664	-Primer Coating, Synthetic, Rust -Inhibiting, Lacquer-Resisting
UU-S-48	-Sacks, Shipping, Paper
PPP-B-636	-Boxes, Shipping, Fiberboard
PPP-B-1055	-Barrier Material, Waterproofed, Flexible
PPP-C-843	-Cushioning Material, Cellulosic
*PPP-C-1752	-Cushioning Material, Packaging, Uncellular Polyethylene Foam, Flexible
PPP-P-40	-Packaging and Packing of Hand Tools
PPP-T-60	-Tape: Packaging, Waterproof
PPP-T-76	-Tape, Pressure-Sensitive Adhesive Paper, (for Carton Sealing)

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: WR-ALC/DSTDL, ROBINS AFB, GA 31098-5999 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSA N/A

PACK

DISTRIBUTION STATEMENT A: Approved for public release; distribution is limited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

Military

MIL-P-116	-Preservation, Methods of
MIL-B-121	-Barrier Material, Greaseproofed, Waterproofed, Flexible
MIL-P-130	-Paper, Wrapping, Laminated and Creped.
MIL-B-131	-Barrier Material, Water Vaporproof, Flexible, Heat-Sealable
MIL-P-10603	-Pumps and Pumping Units, Centrifugal, Power-Driven, for Water, Packaging of
MIL-T-14398	-Tanks, Fabric Collapsible: Water, Nylon, Rubber-Coated
MIL-E-16298	-Electric Machines Having Rotating Parts and Associated Repair Parts: Packaging of
MIL-L-21260	-Lubricating Oil, Internal Combustion Engine, Preservative and Break-In
*MIL-G-52732	-Generator Sets, Gasoline-Engine-Driven, 0.5 KW thru 10KW, 60 Hertz, 400 Hertz and 28 Volt Direct Current, Type 1 (Tactical), Class 2 (Utility) General Specification for

STANDARDS

Military

MIL-STD-105	-Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-Marking for Shipment and Storage
MIL-STD-281	-Automobiles, Trucks, Truck-Tractors, -Trailors and Trailer Dollies; and Packaging of
MIL-STD-1186	-Cushioning, Anchoring, Bracing, Blocking, and Waterproofing; with Appropriate Test Methods

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Naval Publications and Forms Center, (ATTN: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

2.2 Non-Government publications. The following document (s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, ATTN: Tariff Publishing Officer, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

*(Application for copies should be addressed to the American Trucking Association, Inc., Attn: Traffic Dept, 2200 Mill Road, Alexandria VA 22314).

U.S. Department Of Commerce

Voluntary Product Standard PS-51-Hardwood and Decorative Plywood. Products Standards PS-1-Softwood, Plywood; Construction and Industrial.

U.S. Department Of Labor

29CFR Parts 1900 to 1910, Occupational Safety and Health Administration, Labor.

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, DC 20401).

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless specific exemption has been obtained.

3. REQUIREMENTS.

3.1 Preproduction pack. The supplier shall furnish a preproduction pack for examination within the time frame specified (see 6.2), to prove prior to starting production packaging and packing that the applied preservation, packaging, packing, and marking comply with the requirements of this specification. Examination shall be as specified in section 4 and shall be subject to surveillance and approval by the Government (see 6.3).

3.2 Materials. Materials shall be as specified herein and in the applicable specifications. Materials not specified shall be selected by the supplier and shall be subject to all provisions of this specification.

3.3 Preservation and packaging. Preservation and packaging shall be level A,B, or C as specified (see 6.2).

3.3.1 Level A.

3.3.1.1 Preservatives. Preservatives specified herein shall conform to the applicable specifications listed in and shall be applied in accordance with MIL-P-116. CAUTION: Contact preservatives shall not be applied to any surface, other than the interior of the pump, which will come in contact with chemical solutions, slurries, or water, except waste water.

3.3.1.2 Water purification units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

3.3.1.2.1 Actuating and hardware items. Surfaces of bolts, nuts, linkages, pins, grease fittings, levers, adjusting rods, clamps, capscrews, and couplings shall be coated with type P-1 preservative. Surfaces of actuating and hardware items requiring a contact preservative not definitely specified herein shall be coated with type P-1 preservative.

3.3.1.2.2 Belts and pulleys. Belts shall be removed or released from tension. Unpainted pulleys (unless made of corrosion-resistant material) shall be coated with primer conforming to TT-P-664. Removed belts shall be secured to one of the pulleys from which it was removed.

3.3.1.2.3 Electric motors. Electric motors shall be preserved in accordance with MIL-E-16298, level A, by the alternate method as specified therein for assembled machines, except for the solution feeder assembly motor (see 3.3.1.2.4).

3.3.1.2.4 Solution feeder assembly. The solution feeder assembly gear-reduction mechanism and motor housing shall be drained and filled to the operating level with oil conforming to MIL-L-21260, type I, grade 10. The gears shall be actuated to assure coating of all parts and surfaces within the housing.

3.3.1.2.5 Cable assemblies and tubing. The unconnected cable assemblies and tubing shall be coiled to a minimum coil. The coils shall be secured with equally spaced wraps of cotton tape or twine and secured to the nearest bracket or structural member.

3.3.1.2.6 Gate valves and drain cocks. Gate valves and drain cocks shall be left open and openings shall be covered with tape conforming to PPP-T-60, type IV.

3.3.1.2.7 Filter elements. Each filter element shall be packaged in a close-fitting box conforming to PPP-B-636, grade not less than W6c, RSC, end opening.

3.3.1.2.8 Sleeves. A flat separator pad of fiberboard or similar material shall be inserted inside each sleeve. The pad shall be not less than 1/2 inch thick by 4-3/8 inches wide and 13 inches long. Each sleeve shall be wrapped in Kraft paper and inserted into a heat-sealable bag fabricated from material conforming to MIL-B-131, class 2.

3.3.1.2.9 Pump. The pump shall be preserved in accordance with MIL-P-10603, level A. The cord shall be wound and secured to the pump frame. The pump cover shall be preserved in accordance with MIL-P-116, method IC-1, and secured to the pump.

3.3.1.2.10 Accessories. Blind flanges, pipe caps, and capscrews shall be preserved and packaged in accordance with MIL-P-116, method IC-1. Hose clamps shall be secured with cotton tape or wire ties. Preservation or packaging for the paddle and metal pails shall not be required.

3.3.1.2.11 Repair parts. The preservative application criteria and applicable methods of preservation of MIL-P-116 shall be used to preserve repair parts.

3.3.1.2.12 Technical publications. Technical publications shall be preserved in accordance with MIL-P-116, method IC-1.

3.3.1.2.13 Maintenance and operational tools. The grease gun, ball peen hammer, knife, pliers, screwdrivers, and other maintenance and operational tools shall be preserved and packaged in accordance with PPP-P-40, level A.

3.3.1.2.14 Ground rods. The copper wire connected to the ground rod shall be wound around the ground rod and secured to the rod with tape, twine or wire.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

3.3.1.2.15 Intermediate and consolidated packaging. Filter elements, packaged as specified herein, shall be consolidated packaged in the chemical box. The sleeves, packaged as specified herein, shall be intermediate packaged in quantities of four in close-fitting boxes conforming to PPP-B-636, W5c, style optional and consolidated packaged in the chemical box. The paddle shall be consolidated packaged in the tool chest. The blind flanges, pipe caps, hexagon head capscrews, and hose clamps shall be consolidated packaged in the accessory box. Technical publications shall be consolidated packaged in the chemical box. Maintenance tools, preserved and packaged as specified herein, shall be consolidated packaged in the chemical box along with the ground rods and metal pails. Repair parts, preserved and packaged as specified, shall be consolidated packaged in quantities not to exceed the weight limitation in boxes conforming to PPP-B-636, V or W fiberboard, as applicable, style optional. If needed, items of a suitable size may be packed within one or both metal pails; covers shall remain off with the pails sitting on top of the covers.

3.3.1.2.16 Trailer. The trailer shall be preserved in accordance with MIL-STD-281, level A (mobile). The interior surfaces of the brake drums shall be coated with primer as specified therein.

3.3.1.3 Water purification unit.

3.3.1.3.1 Water purification unit. The water purification unit including trailer shall be preserved, packaged, and intermediate (or consolidated) packaged as specified in 3.3.1.2.

3.3.1.3.2 Adapters and bushings. Each adapter and bushing shall be wrapped and nested where possible with paper conforming to MIL-P-130, type II or III; or barrier material conforming to PPP-B-1055, class B-2, or MIL-B-121, type I, grade A, class 2. The paper or barrier material shall be secured with tape conforming to PPP-T-76.

3.3.1.3.3 Cable. The power cable shall be coiled in a minimum coil, not less than 10 times the cable diameter. The coil shall be secured with cotton tape or twine.

3.3.1.3.4 Calcium hypochlorite. The calcium hypochlorite shall be packaged in quantities of twelve 3-3/4 pound containers in a fiberboard box conforming to PPP-B-636, style RSC, type CF, class domestic, variety SW, grade 275.

3.3.1.3.5 Comparator. The components of the comparator shall be placed in the case provided. The case containing the components shall be packaged in a close-fitting container conforming to PPP-B-636, W6c, style optional. The box shall be waterproof sealed with tape in accordance with the appendix to the box specification.

3.3.1.3.6 Generator set. The generator set shall be preserved and packaged in accordance with MIL-G-52732 level A.

3.3.1.3.7 Test solutions. The plastic bottles of ortho-tolidine, wide range pH and sodium arsenite solutions with sealed caps shall require no further packaging.

3.3.1.3.8 Hoses and hose assemblies. The ends of hoses and hose assemblies shall be covered with barrier material conforming to PPP-B-1055, class B-2, or MIL-B-121, type I, grade A, class 2. The barrier material shall be secured with tape conforming to PPP-T-76. The cotton hoses shall be coiled in a minimum coil and secured with a tie of cotton tape or twine. When cotton hoses are furnished in a vendor's carton, no further packaging shall be required.

3.3.1.3.9 Jack. Unprotected metal surfaces of the jack and handle shall be coated with type P-7 preservative. The handle shall be folded to the minimum dimension. The jack and handle shall be

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

wrapped with barrier material conforming to MIL-B-121, type I, grade A, class 2. The barrier material shall be secured with tape conforming to PPP-T-76.

3.3.1.3.10 Key set. The keys shall be placed in the case provided and the case containing the keys shall be preserved in accordance with MIL-P-116, method IC-1.

3.3.1.3.11 Extension light. The light shall be coiled or hanked to occupy minimum space and secured with twine.

3.3.1.3.12 Measures. The measures shall be nested and wrapped with paper conforming to MIL-P-130, type II or III; or barrier material conforming to PPP-B-1055, class B-2 or MIL-B-121, type I, grade A, class 2. The paper or barrier material shall be secured with tape conforming to PPP-T-76.

3.3.1.3.13 Nozzle. The nozzle with nipple and bushing removed shall require no preservation or packaging.

3.3.1.3.14 Pump. The pump shall be preserved in accordance with MIL-P-10603, level A.

3.3.1.3.15 Suction strainers. The suction strainers shall be wrapped with paper conforming to MIL-P-130, type II or III; or barrier material conforming to PPP-B-1055, class B-2 or MIL-B-121, type I, grade A, class 2. The paper or barrier material shall be secured with tape conforming to PPP-T-76.

3.3.1.3.16 Gate valve. The gate valve shall be packaged in a close-fitting box conforming to PPP-B-636, type CF, class domestic, variety SW, grade 125, style optional.

3.3.1.3.17 Wrenches. The open-end wrenches, pipe wrenches, and spanner wrenches shall be preserved and packaged in accordance with PPP-P-40, level A.

3.3.1.3.18 Consolidated packaging. Unless otherwise specified (see 6.2), the following items shall be consolidated packaged in the box or chest specified herein:

Accessories Box	Chemical Box	Tool Chest
+Blind Flanges	Color comparator	Grease gun
+Pipe caps	+Filters	+Hammer
+Cap screws	+Filter sleeves	+Knife
+Hose clamps	+Pails, Steel	+Pliers
Adapters	Technical publications	+Screwdrivers
Bushing		Jack and handle
Nozzle (w/nipple and bushing)		key set
Gate valve		Wrenches, open-end
Extension light		Wrenches, pipe
Suction strainer		Wrenches, spanner
Measures (nested)		+Paddle
Light bulb		+Ground rods w/wire
Test solutions		

Notes: (1) + Indicates a component of the unit.
(2) Accessories box loading plan plate to be used in packaging of items.
(3) Items may be placed inside pails in chemical box.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

The 1-1/4 inch rubber, 1-1/2 inch rubber, 1-1/2 inch cotton and 1 inch polyester hoses shall be consolidated packaged in the two hose compartments of the trailer. The 1 inch rubber hose and the power cable shall be consolidated packaged in the erdlator. Consolidated packaging requirements specified herein have proven adequate to contain all accessories and components. However, when the configuration of these items result in dimensional changes, the supplier may relocate such items in any available space within the confines of the trailer provided that equivalent protection is afforded the item. Relocation of any item shall be subject to the approval of the contracting officer.

3.3.1.3.19 Tanks. The tanks shall be preserved, packaged, and packed in accordance with MIL-T-14398.

3.3.2 Level B.

3.3.2.1 Water purification units. Each water purification unit shall be preserved as specified for level A, with the following exceptions.

3.3.2.1.1 Trailer. The trailer shall be preserved in accordance with MIL-STD-281, level B (mobile).

3.3.2.2 Water purification equipment set. Each water purification equipment set shall be preserved, packaged, and consolidated packaged as specified for level A, with the following exceptions.

3.3.2.2.1 Water purification unit. The water purification unit, including the trailer, shall be preserved, packaged, intermediate and consolidated packaged in accordance with 3.3.2.1 and 3.3.2.1.1.

*3.3.2.2.2 Generator set. The generator set shall be preserved and packaged in accordance with MIL-G-52732, level B.

3.3.3 Level C.

3.3.3.1 Water purification unit and water purification equipment set. Preservation and packaging of each water purification unit or water purification equipment set shall be limited to that protection necessary to provide protection against deterioration and damage from the supplier to the initial destination.

3.4 Packing. Packing shall be level A or C as specified (see 6.2), and shall conform to figures 1 through 8, as applicable.

3.4.1 Level A.

3.4.1.1 Blocking, bracing, and cushioning. Blocking, bracing, and cushioning shall be provided as required to prevent or control movement of packed items and components. Blocking, bracing, and cushioning shall conform to MIL-STD-1186 or as specified herein.

3.4.1.2 Strapping. Where items are secured with steel strapping, the strapping shall conform to QQ-S-781, type I or IV, class B, size 3/4 inch by .035 inch unless otherwise indicated.

*3.4.1.3 Water purification units.

a. Loosen clamp holding the flexible coupling of the effluent launder drain.
b. Wood blocking, nominal 2-inch by 4-inch size, or polyethylene foam conforming to PPP-C-1752 of 3-inch width and 1-inch thickness, nominal density, shall be placed between the bridge rails and launder ring. Raise the level of the effluent launder ring with the leveling screws until the blocking is held securely against the bridge rails. Strap the launder ring to the bridge rails at four points of contact.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

c. Secure low-water-level float assembly with a wood block so that the assembly does not rest on the sensitive switch. Pack cushioning material conforming to PPP-C-843, type I, class B around the float to prevent movement.
d. Lever-type handles of quick-opening gate valves shall be secured with tape conforming to PPP-T-60, type IV.
e. Secure the accessory box in the bracket provided.
f. Secure the chemical box in the bracket provided.
g. The potable raw water pump shall be secured in the location provided on the unit by the straps provided.
h. Exposed threads of unconnected couplings shall be protected with a wrap of tape conforming to PPP-T-60, type IV.
i. The tarpaulin, boxed, folded, or rolled, shall be secured in any available space within the confines of the trailer area. Securement shall be with steel strapping of a minimum size of 3/8 inch. Edge protectors shall be used when tarpaulin is not boxed.
j. The trailer shall be covered with a plywood cap as shown on figures 4 and 5 or 7 and 8 as applicable.

3.4.1.4 Water purification equipment set.

3.4.1.4.1 Accessory box. The accessory box containing the preserved and packaged items shall be secured in the bracket provided.

3.4.1.4.2 Chemical box. The chemical box containing the preserved and packaged items shall be secured in the brackets provided.

3.4.1.4.3 Pump. The gasoline engine driven pump shall be packed in accordance with MIL-P-10603, level A, and shipped in a separate container along with the complete water purification set.

*3.4.1.4.4 Generator. The generator set shall be packed in accordance with MIL-G-52732 level A. The generator set shall be shipped separately but to accompany the other set components.

3.4.1.4.5 Water purification unit. The water purification unit shall be packed as specified for level A for the unit (see 3.4.1.3).

3.4.1.4.6 Calcium hypochlorite. The calcium hypochlorite shall be packed in accordance with figure 1.

3.4.1.4.7 Filter aids and limestone. The filter aids and limestone shall be packed in sacks conforming to UU-S-48, and the sacks packed as shown in figure 2.

3.4.1.4.8 Rubber pails. The pails shall be inverted over the raw water pump frame and secured by strapping the pail cover in position with the web strapping as provided.

3.4.1.4.9 Repair parts and maintenance tools. Any additional repair parts and maintenance tools shall be secured in any available space within the confines of the trailer body area.

3.4.1.4.10 Tarpaulin. The tarpaulin shall be secured on top of the hypochlorite box by strapping it to the filter unit.

3.4.1.4.11 Activated carbon and ferric chloride. The activated carbon and ferric chloride shall be secured in the front area of the trailer as shown on figure 3 or figure 6 as applicable. Securement by means of steel strapping of a minimum size 3/8 inch by 0.015 inch, class B, conforming to QQ-S-781, shall be accomplished by encircling each container and the stakes of the side and end racks with a single strap.

3.4.1.4.12 Trailer loading. All components preserved, packaged, and packed as specified herein shall be loaded on the trailer in accordance with figure 3 or figure 6 as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

3.4.1.4.13 Trailer cap. The trailer shall be covered with a plywood cap as shown on figures 4 and 5 or 7 and 8 as applicable.

3.4.2 Level C.

3.4.2.1 Water purification unit. Each complete water purification unit, components, repair parts, tools, and technical publications shall be packed to ensure carrier acceptance and safe delivery to destination at lowest ratings in compliance with Uniform Freight Classification rules or National Motor Freight Classification rules.

3.4.2.2 Water purification equipment sets. Each complete water purification equipment set shall be packed to ensure carrier acceptance and safe delivery to destination at lowest ratings in compliance with Uniform Freight Classification rules or National Motor Freight Classification rules.

3.5 Depreservation guide. Two depreservation guides shall be prepared. Each guide shall be placed in a waterproof envelope marked "Depreservation Guide". One guide shall be placed in a conspicuous location on the water purification unit or the water purification equipment set. The second guide shall be placed in the chemical box. Unless otherwise specified (see 6.2), DA Form 2258 - "Depreservation Guide for Vehicles and Equipment" shall be used (see 6.4).

3.6 Marking. Marking shall be in accordance with MIL-STD-129.

3.7 Workmanship. All operations and processes involved in accomplishing the preservation, packaging, packing and marking requirements specified herein shall be in accordance with the highest grade practice associated with this type of work.

4. QUALITY ASSURANCE PROVISIONS.

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

*4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Material inspection. The supplier is responsible for ensuring that supplies and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards.

4.2 Classification of inspection. Inspection shall be classified as follows:

a. Preproduction pack inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 Preproduction pack inspection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

4.3.1 Examination. The preproduction pack shall be examined for the defects specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Unit of product. For the purpose of inspection, a completed pack of any one level prepared for shipment shall be considered a unit of product.

4.4.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.4.3 Examination. Samples selected in accordance with 4.4.2 shall be examined for the defects marked "X" for the applicable level in table I. Acceptable quality level (AQL) shall be 2.5 percent defective.

4.5 Inspection procedure.

4.5.1 Examination. Packs shall be examined for the defects listed in table I.

Table I. Classification of Defects

	Defect	Level A	Level B	Level C
101.	Materials, methods, or containers not as specified for preservation, packaging, intermediate packaging, or packing. Each incorrect material, method, or container shall constitute one defect.	X	X	-
102.	Preservatives applied to surfaces which will come in contact with chemical solutions and water, except waste water, except as specified for pump interiors.	X	X	-
103.	Belts not removed or released from tension.	X	X	-
104.	Solution feeder assembly not preserved as specified.	X	X	-
105.	Electric motors not preserved as specified.	X	X	-
106.	Float switch rod and float not secured.	X	X	-
107.	Gate valves and drain cocks not left open and openings not taped.	X	X	-
108.	Filter elements not preserved and intermediate packaged as specified.	X	X	-
109.	Sleeves not packaged and intermediate packaged as specified.	X	X	-
110.	Pumps not preserved as specified.	X	X	-
111.	Intermediate packaging not as specified.	X	X	-
112.	Trailer not preserved as specified.	X	X	-
113.	Trailer brakes not coated with primer.	X	X	-
114.	Calcium hypochlorite not packaged as specified.	X	X	-
115.	Pump cover not preserved as specified.	X	X	-
116.	Generator set not preserved as specified.	X	X	-
117.	Ends of hoses and hose assemblies not covered as specified, except when boxed.	X	X	-
118.	Components not wrapped in barrier material and secured with tape as specified.	X	X	-

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:09Z
Check the source to verify that this is the currentversion before use.

Table I continued)

119.	Tanks not preserved and packed as specified.	X	X	-
120.	Effluent launder not strapped to rails and leveling rods not secured as specified.	X	X	-
121.	Filter aids (diatomaceous earth or pearlite) not level A bags as specified.	X	X	-
122.	Activated carbon not placed and strapped as specified.	X	X	-
123.	Ferric chloride not placed and strapped as specified.	X	X	-
124.	Actuating and hardware items not preserved as specified.	X	X	-
125.	Accessories, repair parts, technical publications, or maintenance and operational tools not preserved and packaged as specified.	X	X	-
126.	Components not blocked, braced, anchored, or arranged within the trailer as specified.	X	X	-
127.	Depreservation guide not prepared and attached as specified.	X	X	-
128.	Marking illegible, incorrect, incomplete, or missing.	X	X	-
129.	Filter aids (diatomaceous earth or pearlite) and limestone not packed in accordance with figure 2.	X	X	-

5. PREPARATION FOR DELIVERY.

(Not applicable to this specification)

6. NOTES.

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. This specification is intended to be used for direct reference in contracts or orders and in section 5 of commodity specifications for the preservation, packaging, packing, and marking of 600 gph cargo trailer mounted, type I and trailing arm trailer mounted, type II water purification units: and 600 gph trailing arm trailer mounted, type II water purification equipment sets.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.
b. Time frame required for submission of preproduction pack (see 3.1).
c. Level of preservation and packaging and level of packing required (see 3.3 and 3.4). Level B preservation and packaging is intended to provide limited but economical protection and should be specified only when it is determined the water purification units or water purification equipment sets will be held in covered storage.
d. When the items shall be packaged other than as specified (see 3.3.1.3.18).
e. When other than DA Form 2258 is required (see 3.5).

6.3 Preproduction pack. Any changes or deviations of production packs from the approved preproduction pack will be subject to the approval of the contracting officer. Approval of the preproduction pack will not relieve the supplier of his obligation to preserve, package, pack, and mark the water purification units and water purification equipment sets in accordance with this specification.

6.4 DA Form 2258. The contracting officer should arrange to furnish DA Form 2258 when requested by the supplier.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

6.5 Subject term (key word) listing.

Packaging
Water purification equipment set
Water purification unit


6.6 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodian:
Air Force - 99

Preparing activity:
Air Force - 84

Project No:
Pack-0742

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:09Z
Check the source to verify that this is the current version before use.

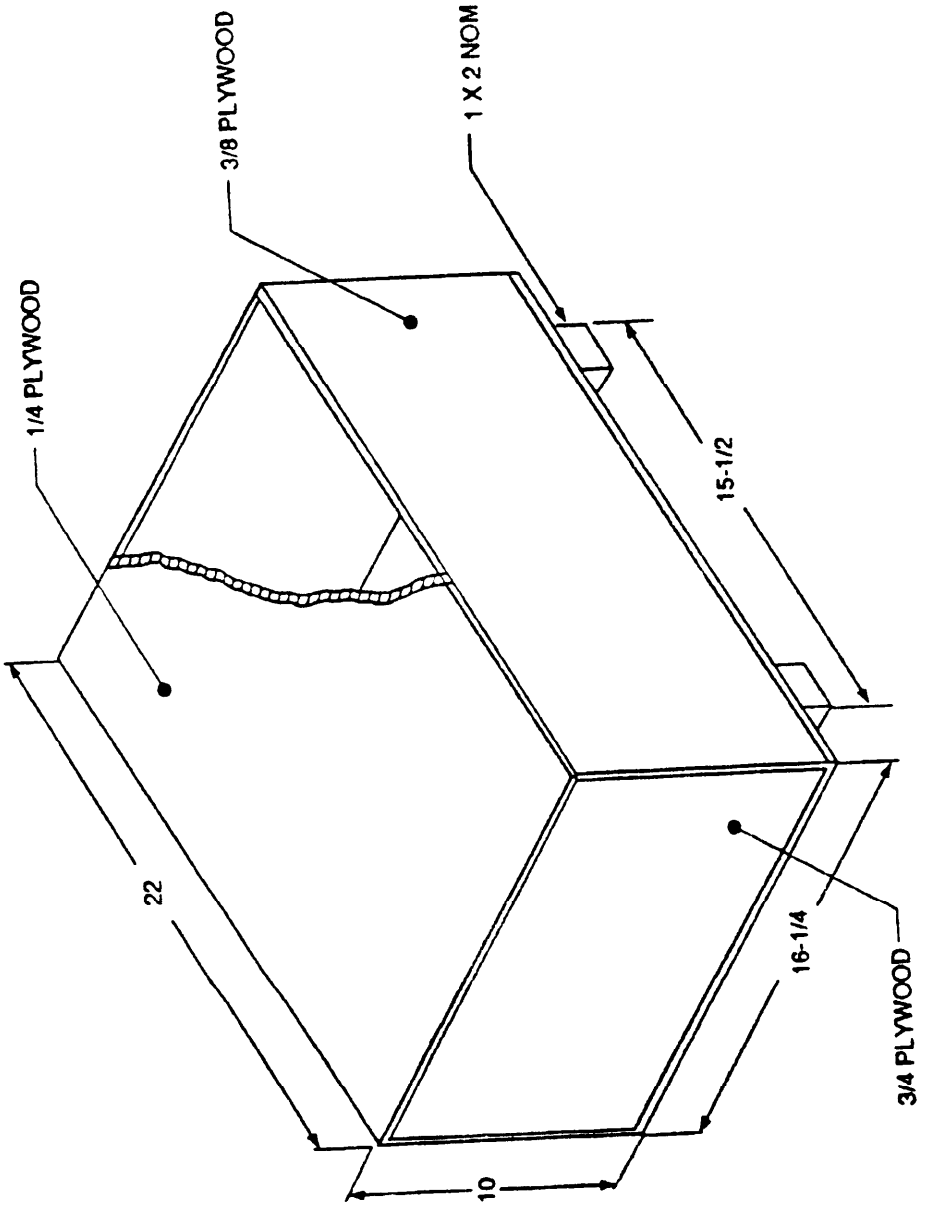

CONTAINER FOR 12-3-3/4 LB. BOTTLES CALCIUM HYPOCHLORITE


NOTES:

1. PLYWOOD SHALL CONFORM TO REQUIREMENTS OF NN-P-530, GROUP A (PS-51, TYPE I, GRADE 3-4) OR GROUP B (PS-1, STANDARD SHEATHING, WITH EXTERIOR GLUE).
2. NAILS, 6d CEMENT COATED, CONFORMING TO FF-N-105, TYPE II, STYLE 4, SHALL BE SPACED ON FIVE INCH CENTERS, MINIMUM.

X1678B

Figure 1. PACKING LEVEL A

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:09Z
Check the source to verify that this is the current version before use.

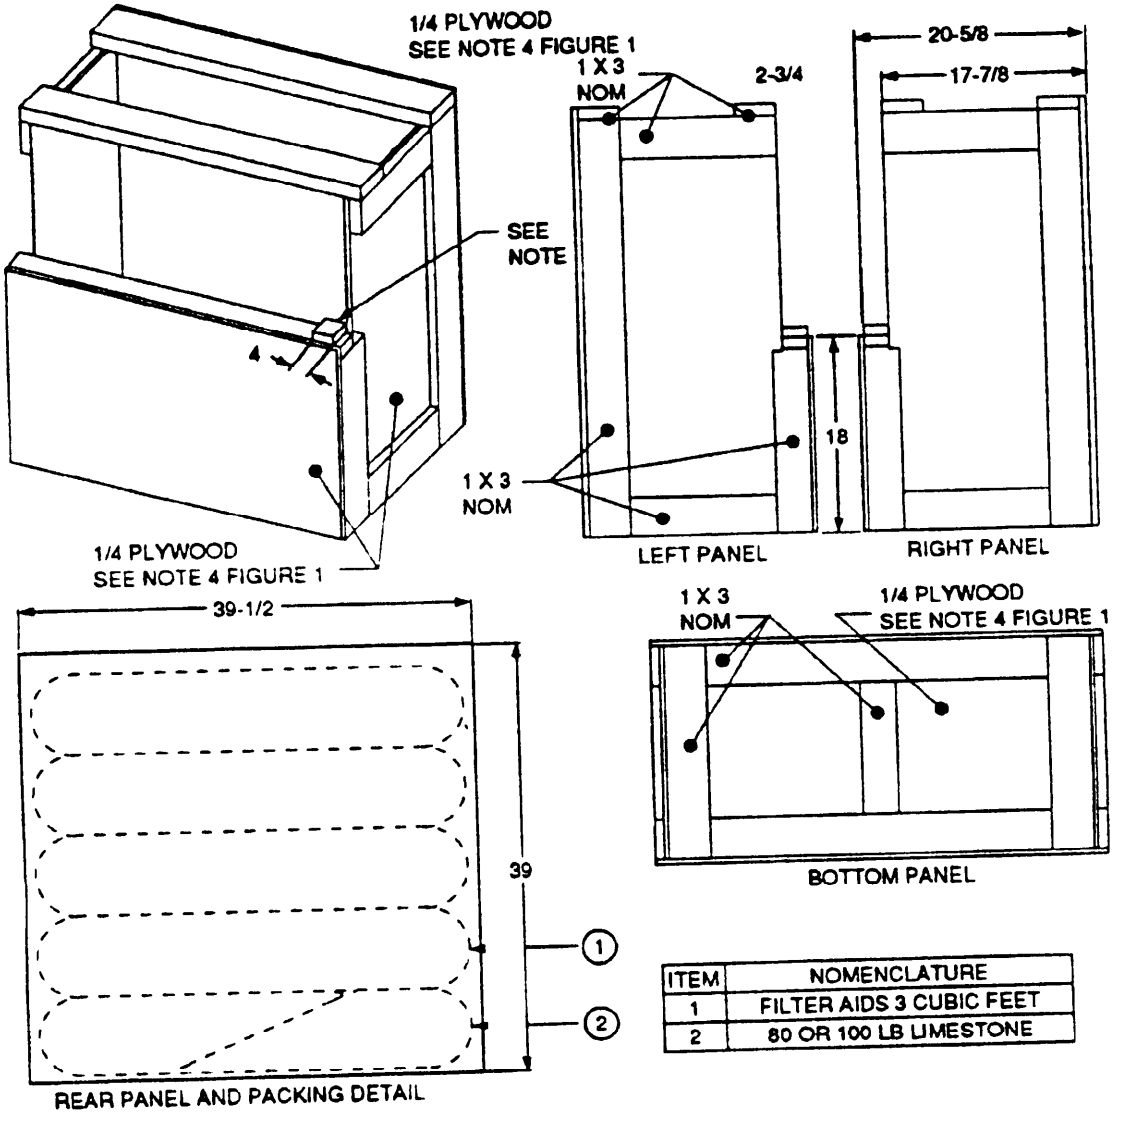


ITEM	NOMENCLATURE
1	FILTER AIDS 3 CUBIC FEET
2	80 OR 100 LB LIMESTONE

NOTE:
BLOCK TO RESTRAIN TANK BOX, TO BE POSITIONED AND SECURED AFTER LOADING ON TRAILER.

Figure 2. PACKING LEVEL A.

X1679A

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:09Z
Check the source to verify that this is the current version before use.

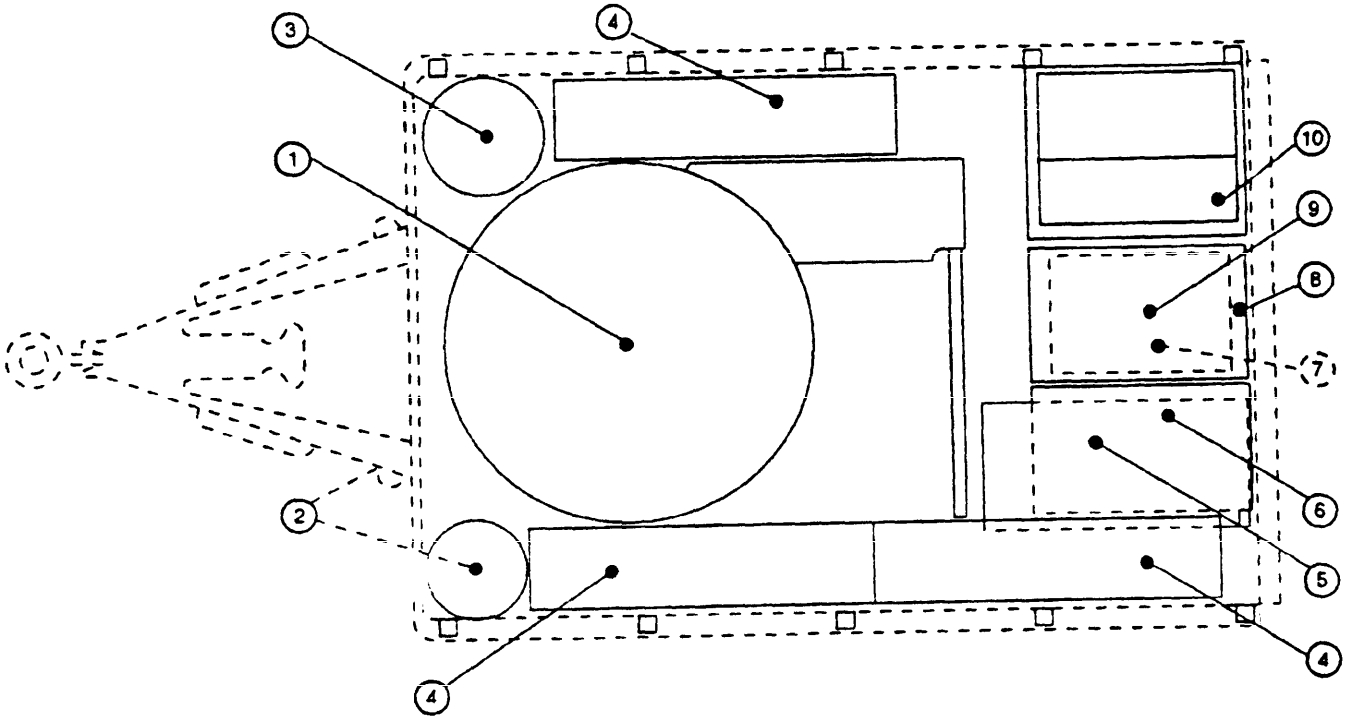

ITEM	NOMENCLATURE
1	ERDLATOR
2	ACTIVATED CARBON
3	FERRIC CHLORIDE
4	TANK
5	LIMESTONE & FILTER AIDES

ITEM	NOMENCLATURE
6	ACCESSORY BOX
7	CANVAS COVER (NOT SHOWN)
8	CHEMICAL BOX
9	CALCIUM HYPOCHLORITE
10	TOOL CHEST


NOTE:
TRAILER BOWS SHALL BE LOCATED IN THE LOWEST IN-USE POSITION (APPROX 60-INCHES ABOVE TRAILER FLOOR).

PLAN VIEW DROP AXLE TRAILER

Figure 3. PACKING, LEVEL A.

X1680A


Source: https://assist.dla.mil -- Downloaded: 202610-26T04:09Z
Check the source to verify that this is the current version before use.

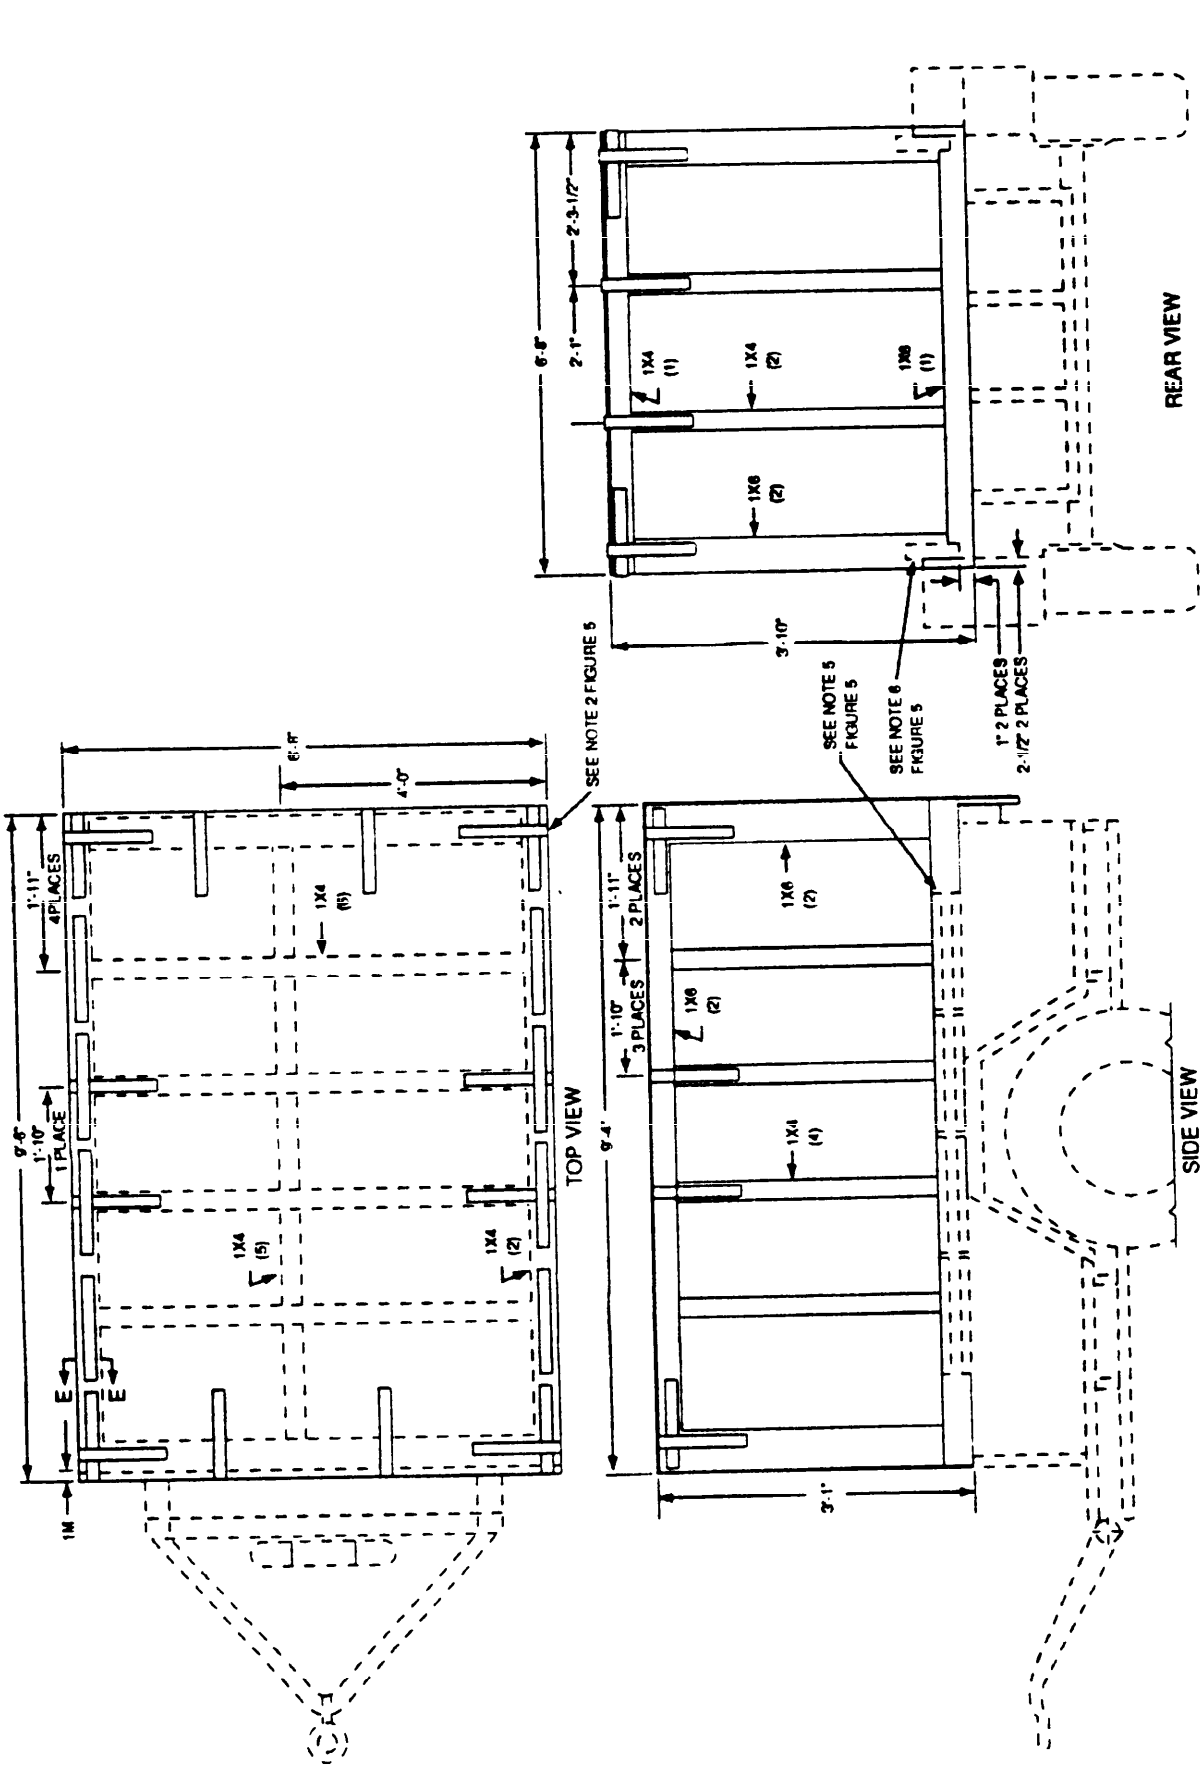

PLYWOOD CAP DROP AXLE TRAILER (SEE FIGURE 5)

Figure 4. PACKING LEVEL A.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

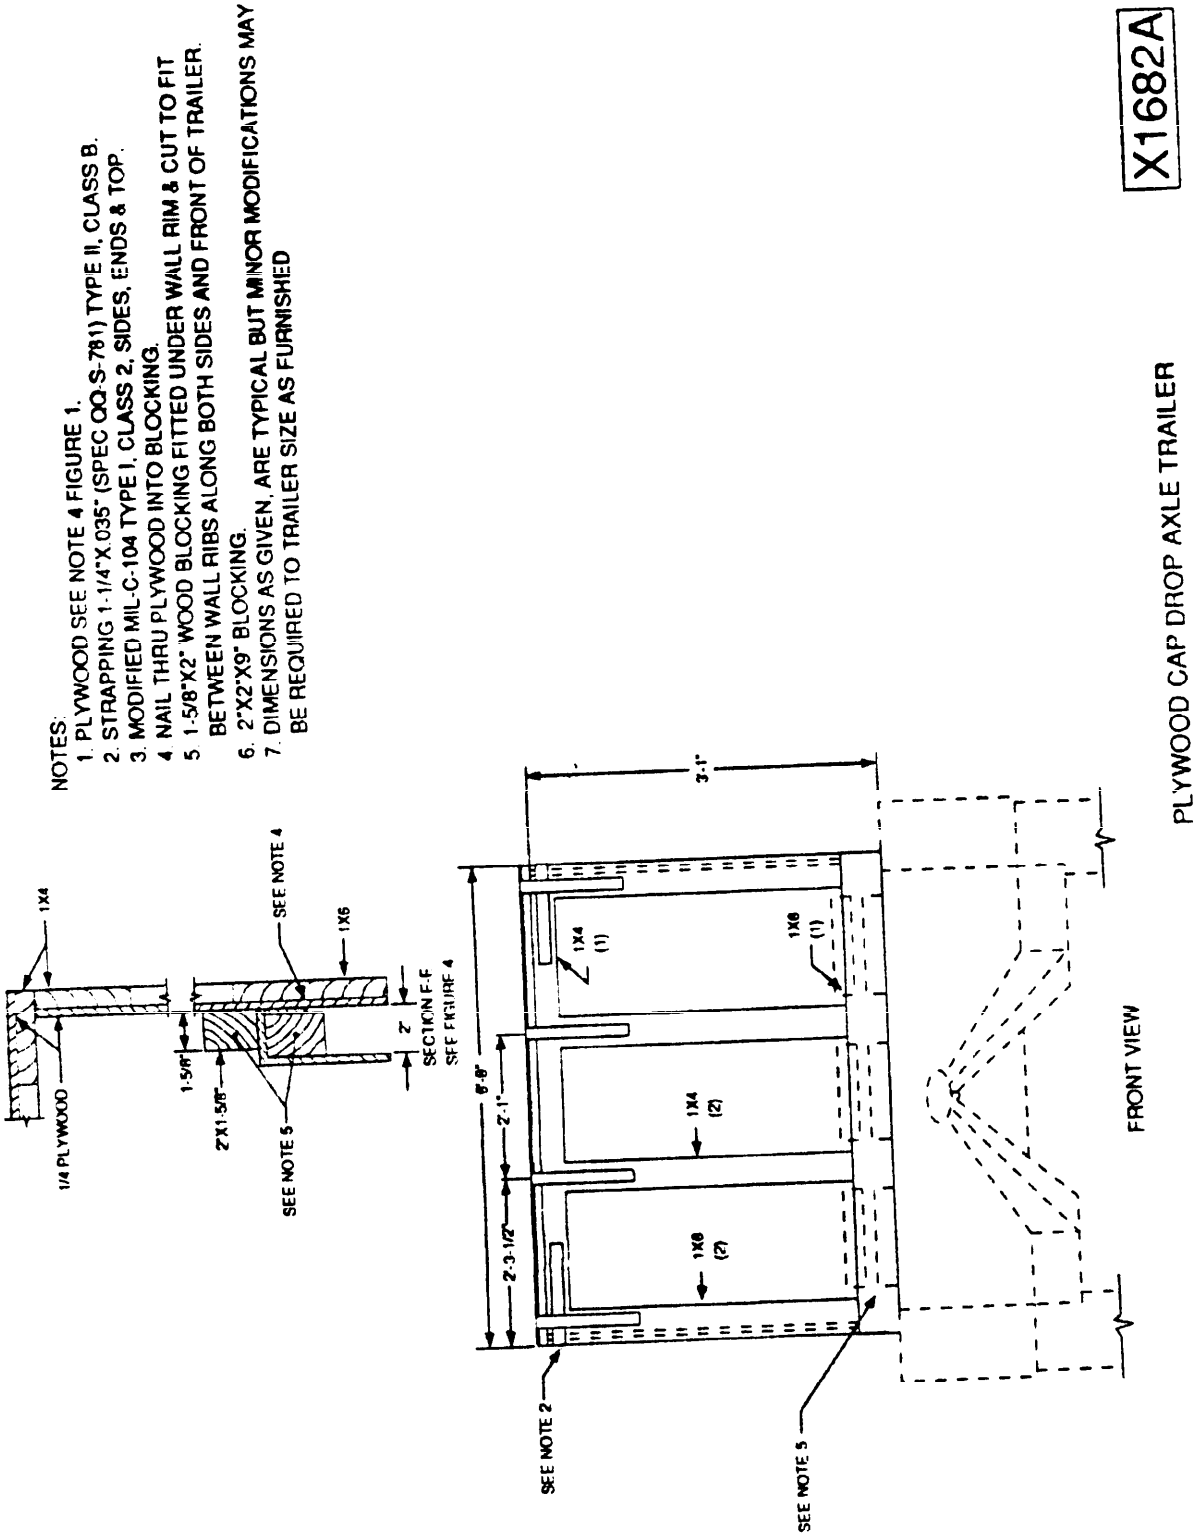

PLYWOOD CAP DROP AXLE TRAILER

Figure 5. PACKING, LEVEL A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

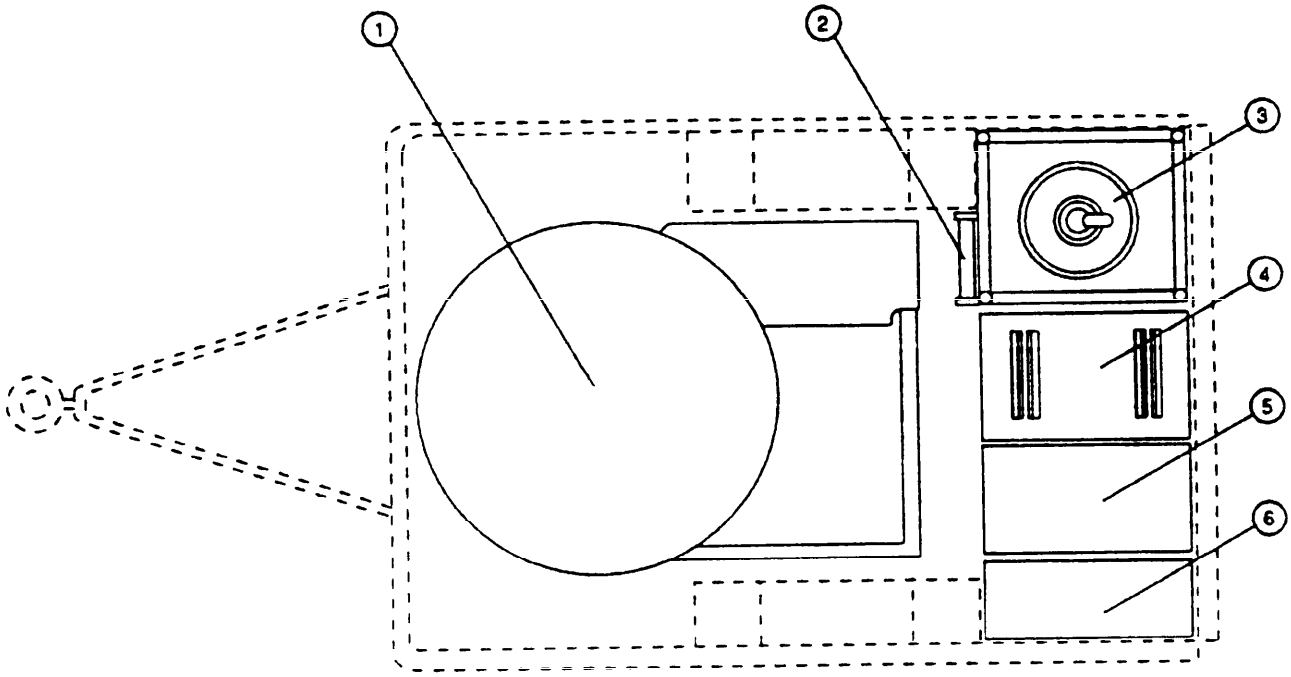

ITEM	NOMENCLATURE
1	ERDLATOR
2	LADDER
3	FILTER
4	CHEMICAL BOX
5	ACCESSORY BOX
6	TOOL CHEST

NOTE:
TRAILER BOWS SHALL BE LOCATED IN THE LOWEST IN-USE POSITION (APPROX 60-INCHES ABOVE TRAILER FLOOR).

PLAN VIEW, M 105A2 TRAILER

X1683A

Figure 6. PACKING, LEVEL A.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.


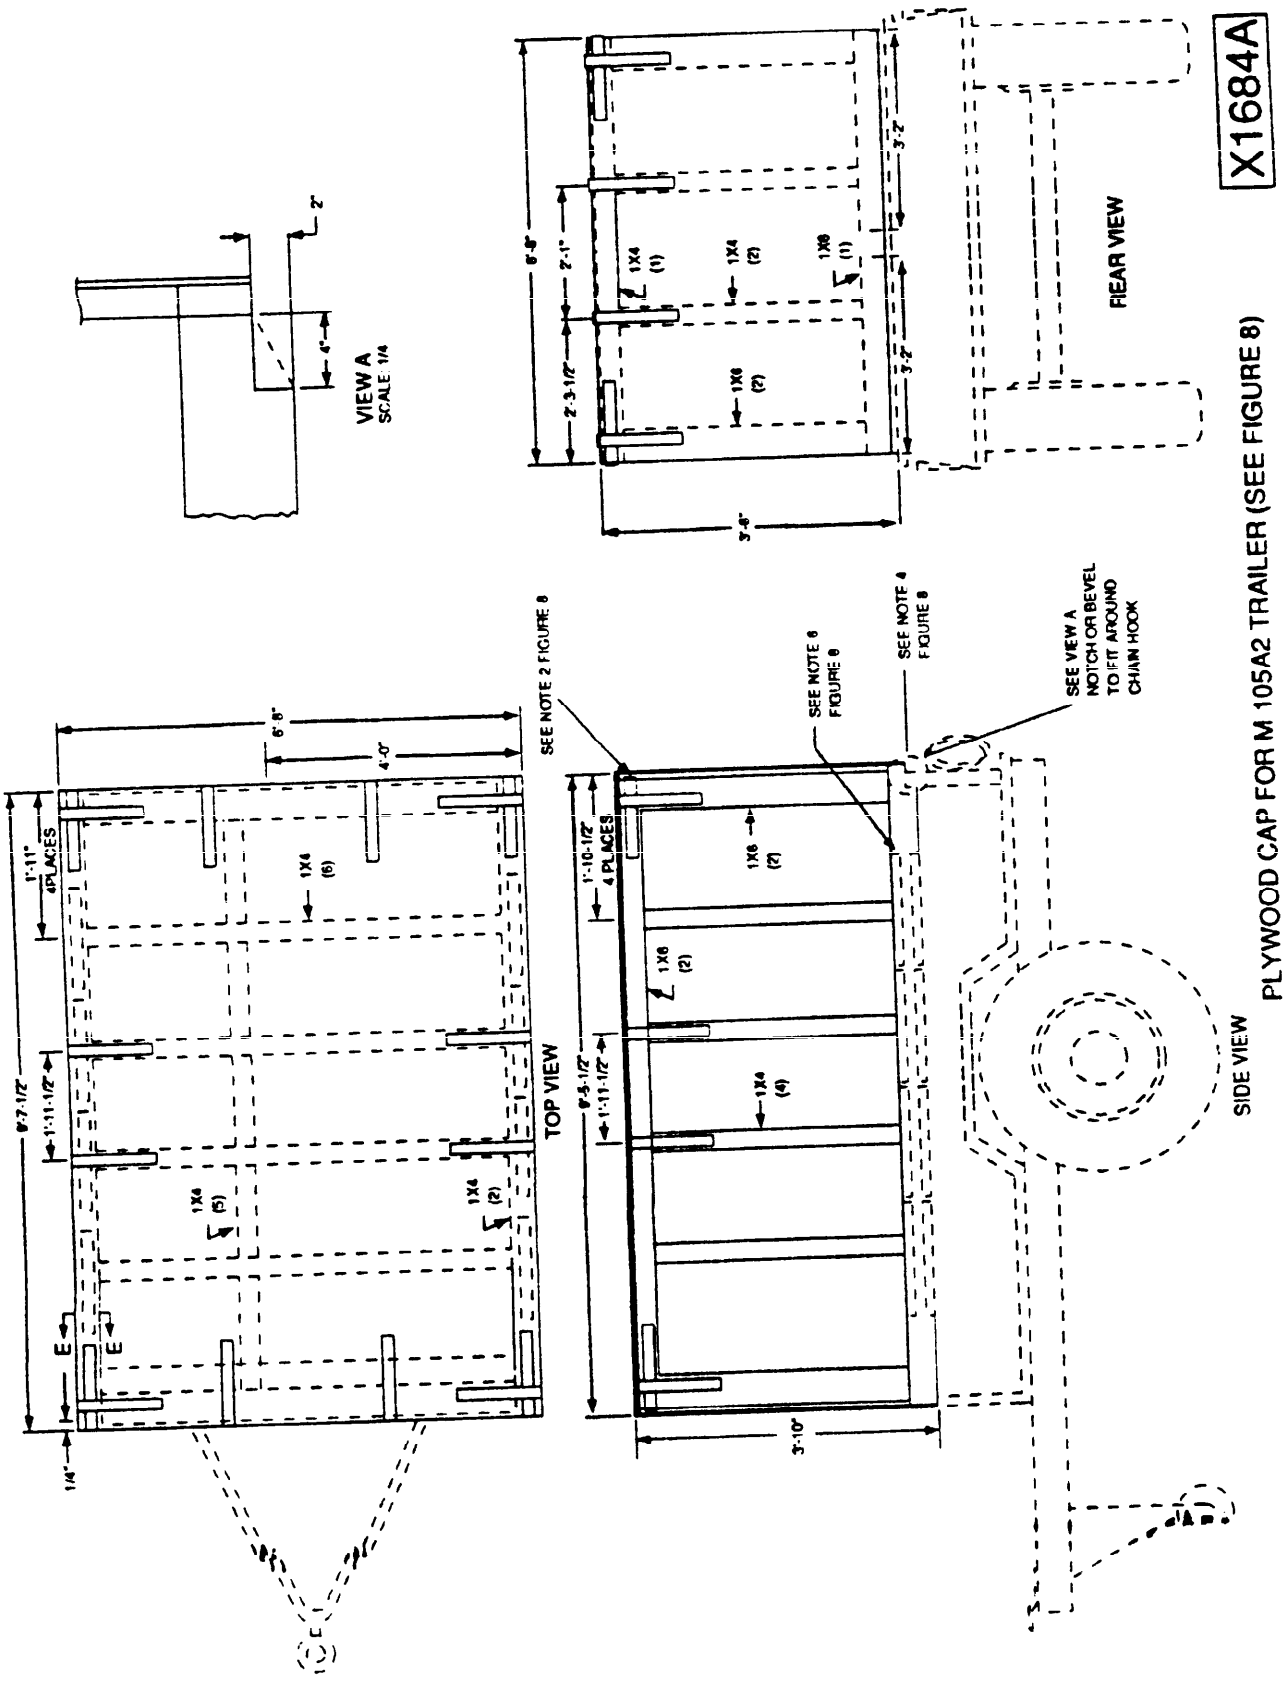


Figure 7. PACKING, LEVEL A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

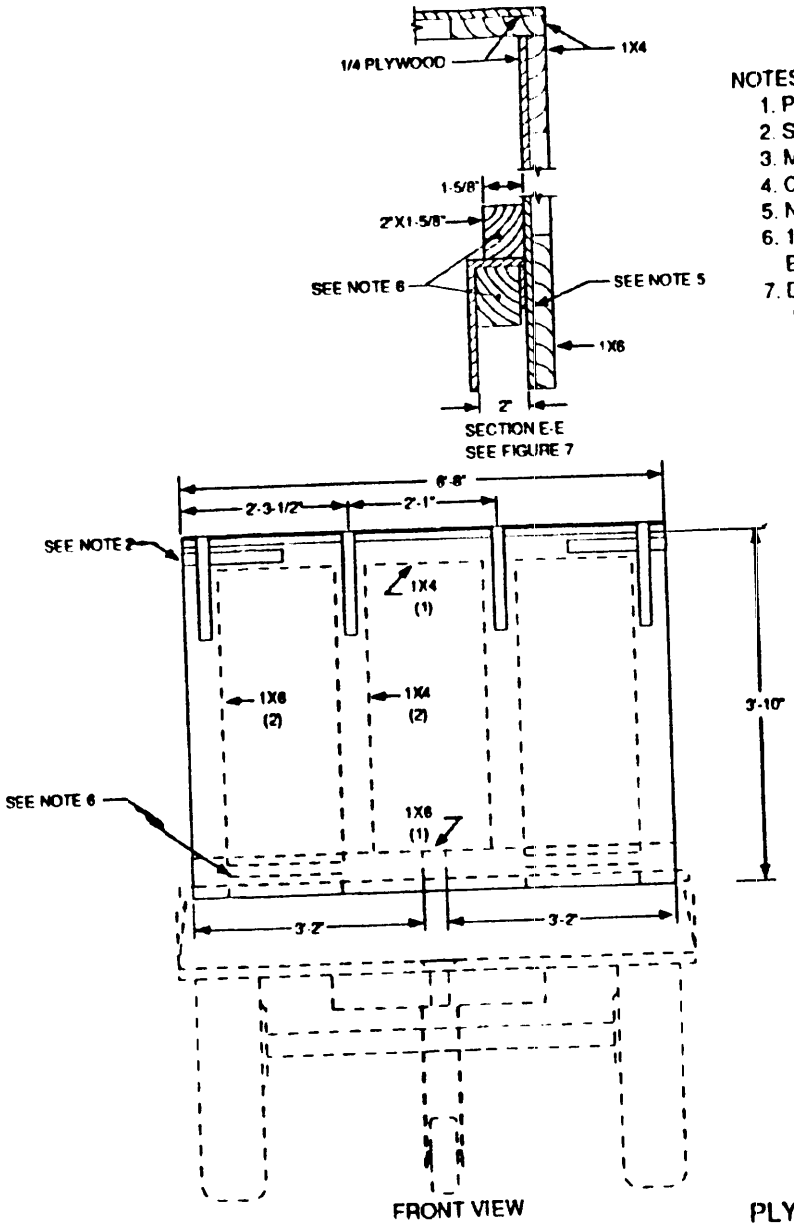

NOTES:

1. PLYWOOD SEE NOTE 4 FIGURE 1.
2. STRAPPING 1-1/4"X.035" (SPEC QQ-S-781) TYPE II, CLASS B.
3. MODIFIED MIL-C-104 TYPE I, CLASS 2, SIDES, ENDS & TOP.
4. CORNERS SQUARE CUT OR BEVELED AS REQUIRED
5. NAIL THRU PLYWOOD INTO BLOCKING
6. 1-5/8"X2" WOOD BLOCKING FITTED UNDER WALL RIM & CUT TO FIT BETWEEN WALL RIBS ALONG BOTH SIDES AND FRONT OF TRAILER.
7. DIMENSIONS, AS GIVEN, ARE TYPICAL BUT MINOR MODIFICATIONS MAY BE REQUIRED TO CONFORM TO TRAILER SIZE AS FURNISHED

PLYWOOD CAP M105A2 TRAILER

X1685A

Figure 8. PACKING, LEVEL A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

STRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in mitting comments and suggestions for improvements. All users of military standardization documents are invited to provide gest/ This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and iled. block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the blems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an knowledgement will be mailed to you within 30 days to let you know that your comments were received and are being nsidered.

OTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of ecification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization waive any portion of the referenced document*(s)* or to amend contractual requirements.

☆ U.S. Government Printing Office: 1985—880-870/8804

(Fold along this line)

(Fold along this line)

FFICIAL BUSINESS
ENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 73236 WASH DC

POSTAGE WILL BE PAID BY HQ U.S. AIR FORCE

WR-ALC/DSTDL
Robins AFB GA 31098-5609

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-W52624B (USAF)	

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:09Z
Check the source to verify that this is the current version before use.