

MILITARY SPECIFICATION SHEET

AMPLIFIERS, RADIOFREQUENCY AND MICROWAVE, SOLID-STATE, WIDEBAND, COAXIAL CONFIGURATION

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring amplifiers described herein shall consist of this specification sheet and the latest issue of MIL-A-28875.

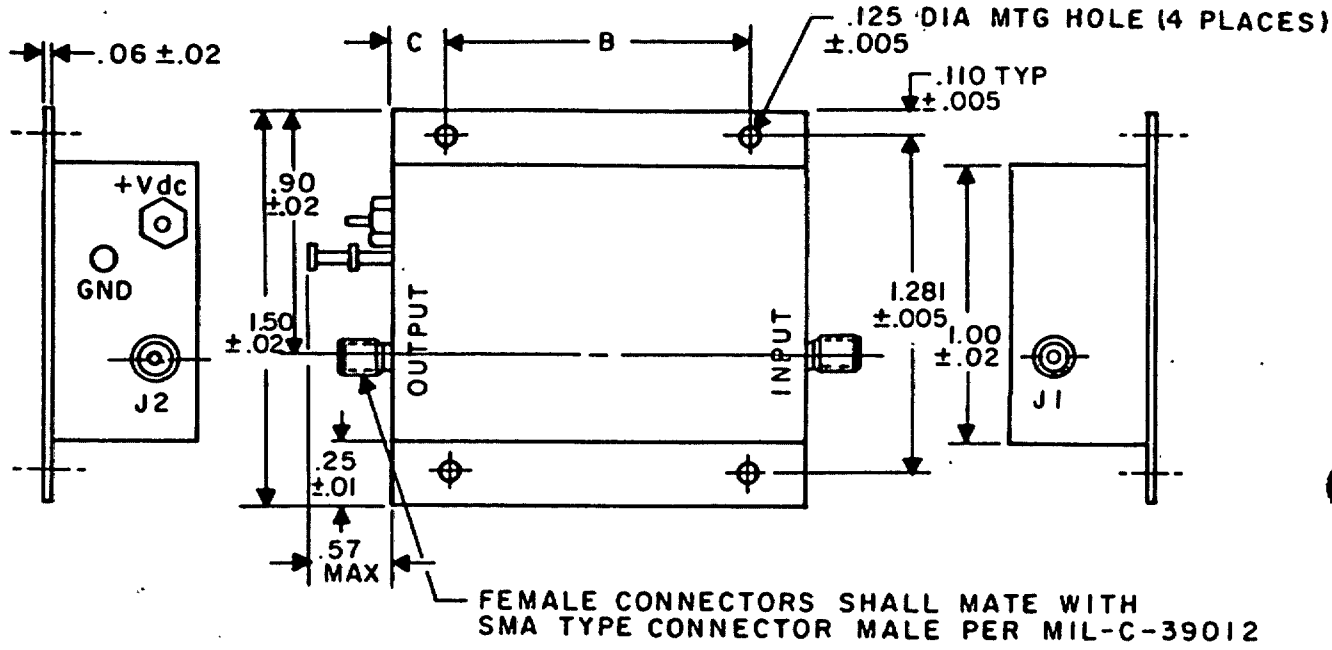

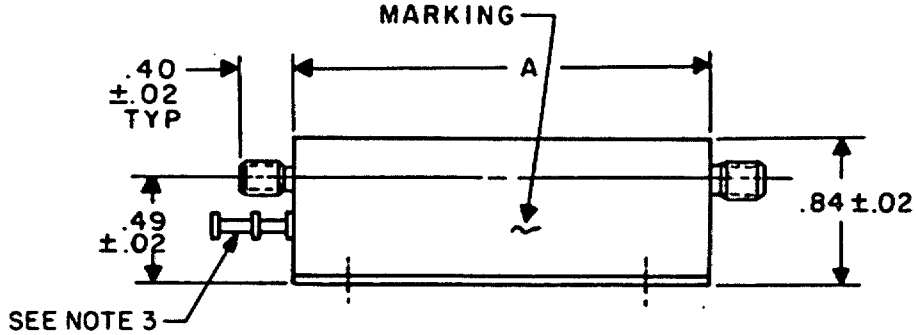


INCHES	MM
.005	.13
.01	.3
.02	.5
.06	1.5
.11	2.8
.125	3.18
.25	6.4
.40	10.2
.49	12.5
.57	14.5
.84	21.3
.90	22.9
1.00	25.4
1.281	32.54
1.50	38.1

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Barrel diameter shall accept two turns of AWG NO. 24 wire.

FIGURE 1. Dimensions and configuration, dash numbers -01, -02, -03, and -05.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:23Z
Check the source to verify that this is the current version before use.

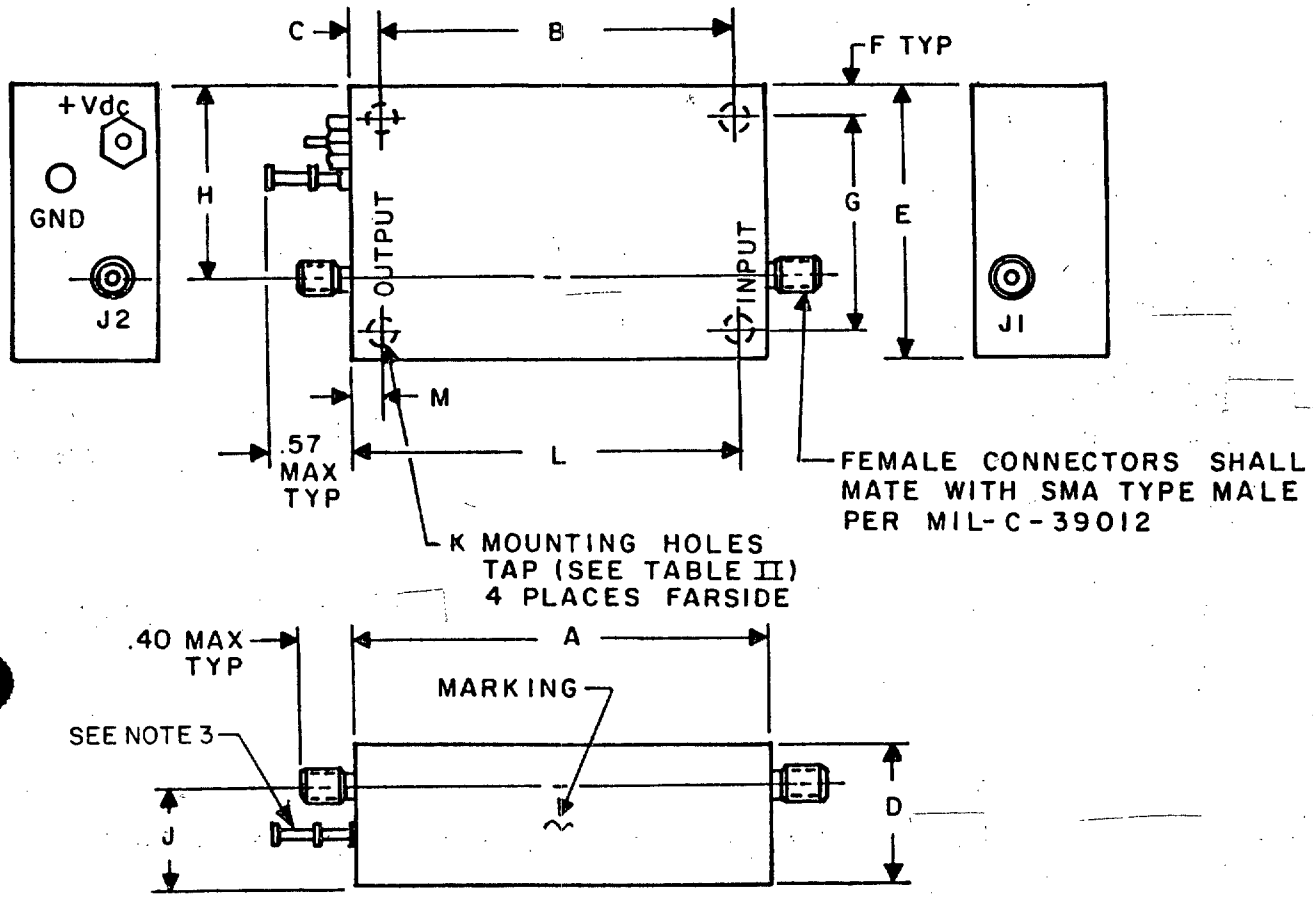

INCHES	MM
.40	10.2
.57	14.5

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Barrel diameter shall accept two turns of AWG NO. 24 wire.

FIGURE 2. Dimensions and configuration, dash numbers -04, -06, and -07.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:23Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics (25°C unless otherwise specified).

Dash number		Frequency range	DC input power		Gain (dB)	Gain flatness (dB)	RF output power (dBm)	VSWR Max		Noise figure (dB)	Intercept point (dBm)	Gain vs tempera-ture (dB)	RF input power (mW)
			Voltage	Current Max (mA)	Min	Max	Min	IN	OUT	Max	Min		Max
01	S1 S2 N	10-500 MHz	15 ±1%	125	9 @ 25°C 8 @ 71°C	±1.0	+18 @ 25°C +17 @ 71°C	2.0:1	2.0:1	8.5 @ 25°C 9.5 @ 71°C	---	±1	---
02	S1 S2 N	5-500 MHz	15 ±1%	60	27	±1.0	+6	2.0:1	2.0:1	5.5	---	±1	---
03	S1 S2 N	5-1000 MHz	15 ±1%	70	28	±1.0	+7	2.0:1	2.0:1	7.0	---	±1	---
04	S1 S2 N	10-2000 MHz	15 ±1%	45	7	±1.0	+13.5	2.2:1	2.2:1	8.5	+28	±1	100
05	S1 S2 N	10-2000 MHz	15 ±1%	97	26	±1.0	+14	2.5:1	2.5:1	6.5	+24	±1	---
06	S1 S2 N	4-8 GHz	12 ±1%	240	30	±1.5	+10	2.0:1	2.0:1	6	---	±2	---
07	S1 S2 N	7-11 GHz	12 ±1%	360	42	±2.0	+10	2.0:1	2.0:1	6	+20	±2	---

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:23Z
Check the source to verify that this is the current version before use.

TABLE II. Mechanical, physical and environmental characteristic.

Dash number	Dimensions												Weight	Temperature range		Seal	Salt	EMI	Figure number
	A	B	C	D	E	F	G	H	J	K	L	M	Max oz	Operating case temp	Nonoperating				
S1 01 S2 N	1.37 ±.02	1.000 ±.005	.190 ±.01	---	---	---	---	---	---	---	---	---	4.4	-45/+71°C	-57/+71°C	Non-hermetic	N/A	CE03 of MIL-STD-461	1
S1 02 S2 N	1.37 ±.02	1.000 ±.005	.190 ±.02	---	---	---	---	---	---	---	---	---	4.4	-45/+81°C	-57/+81°C	Non-hermetic	N/A	CE03 of MIL-STD-461	1
S1 03 S2 N	1.37 ±.02	1.000 ±.005	.190 ±.02	---	---	---	---	---	---	---	---	---	4.4	-45/+81°C	-57/+81°C	Non-hermetic	N/A	CE03 of MIL-STD-461	1
S1 04 S2 N	.82 ±.02	.320 ±.005	.250 ±.01	.50 ±.02	1.00 ±.02	.095 ±.005	.810 ±.005	.54 ±.02	.19 ±.02	2-56 UNC 2B X .15 dP	.460 ±.01	.250 ±.01	3.3	-54/+100°C	-62/+125°C	Hermetic	N/A	CE03 of MIL-STD-461	2
S1 05 S2 N	2.40 ±.02	2.000 ±.005	.200 ±.01	---	---	---	---	---	---	---	---	---	3.3	-45/+71°C	-57/+71°C	Non-hermetic	N/A	CE03 of MIL-STD-461	1
S1 06 S2 N	3.02 ±.02	2.748 ±.005	.142 ±.01	.862 ±.02	1.85 ±.02	.105 ±.005	1.659 ±.005	1.08 ±.02	.48 ±.02	2-56 UNC 2B X .25 dP	2.748 ±.01	.142	8.8	-54/+71°C	-57/+75°C	Non-hermetic	N/A	CE03 of MIL-STD-461	2
S1 07 S2 N	3.66 ±.02	3.350 ±.005	.150 ±.01	.850 ±.02	1.68 ±.02	.150 ±.005	1.380 ±.005	1.08 ±.02	.45 ±.02	4-40 UNC 2B X .25 dP	3.350 ±.01	.150 ±.01	14	-54/+71°C	-57/+71°C	Non-hermetic	N/A	CE03 of MIL-STD-461	2

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:23Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figures and table II.

Electrical characteristics: See table I.

Physical and environmental characteristics: See table II.

Part number: M28875 /11-(dash number from tables I and II).

NOTE: Amplifiers covered by this specification sheet are substitutable for the following manufacturer's or user's part number. This information in no way implies that the manufacturer's part is suitable as a substitute for the military part number.

Dash number	Manufacturer's code	Manufacturer's part number
01S	80063	SM-A-802901-1
01S	24539	ASD 9656M
02S	80063	SM-C-800833-2
02S	24539	UTA-8120M
03S	80063	SM-C-800833-3
03S	24539	UTA-8202M
04S	06401	7912481-01
04S	14482	WJ-CA37
05S	24539	UTC-21-103
06S	14482	5300-533
07S	93346	3451746-1
07S	14482	5311-516

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - OS, SH
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AV
Navy - AS, MC
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5985-0968-11)

☆U.S. GOVERNMENT PRINTING OFFICE: 1983 — 606-034/3977

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:23Z
Check the source to verify that this is the current version before use.