

MILITARY SPECIFICATION SHEET

AMPLIFIERS, RADIOFREQUENCY AND MICROWAVE, SOLID-STATE, LOW NOISE, NARROWBAND, COAXIAL CONFIGURATION

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring amplifiers described herein shall consist of this specification sheet and the latest issue of MIL-A-28875.

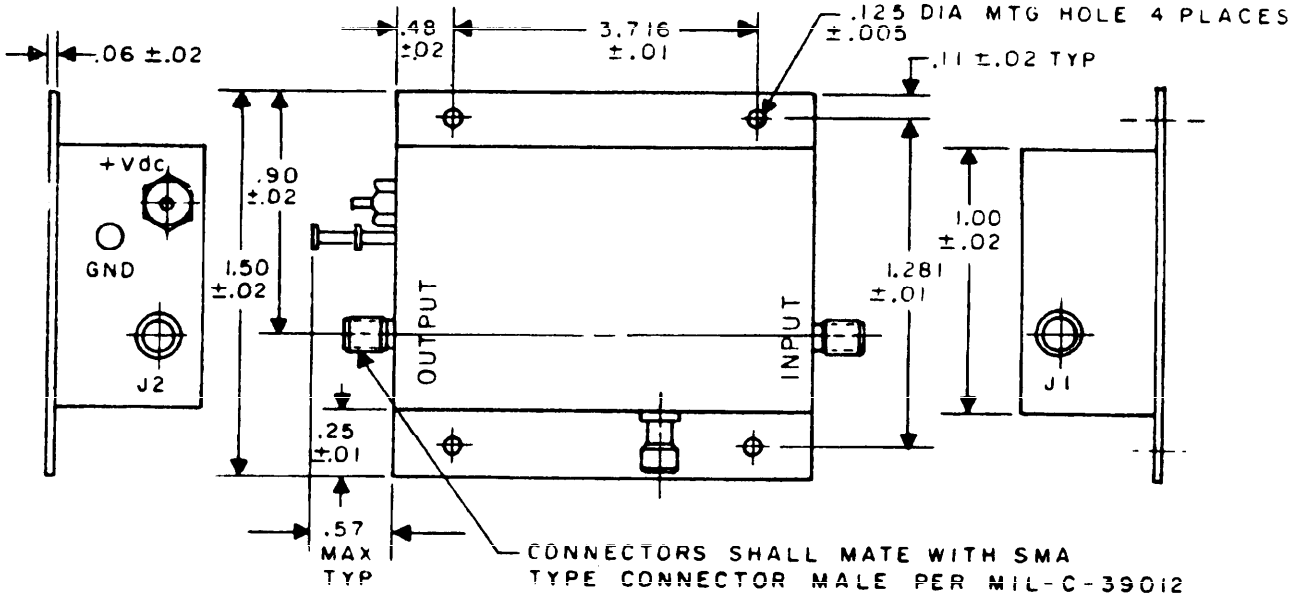

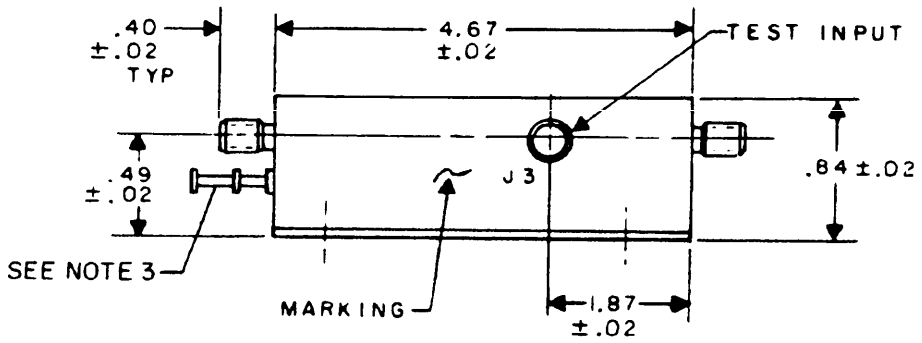


INCHES	MM
.005	.13
.01	.3
.02	.5
.06	1.5
.11	2.8
.125	3.18
.25	6.4
.40	10.2
.48	12.2
.49	12.5
.57	14.5
.84	21.3
.90	22.9
1.00	25.4
1.281	32.54
1.50	38.1
1.87	47.5
3.716	94.39
4.67	118.6

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Barrel diameter shall accept two turns of AWG NO. 24 wire.

FIGURE 1. Dimensions and configuration, dash number -01.

FSC 5985

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:21Z
Check the source to verify that this is the current version before use.

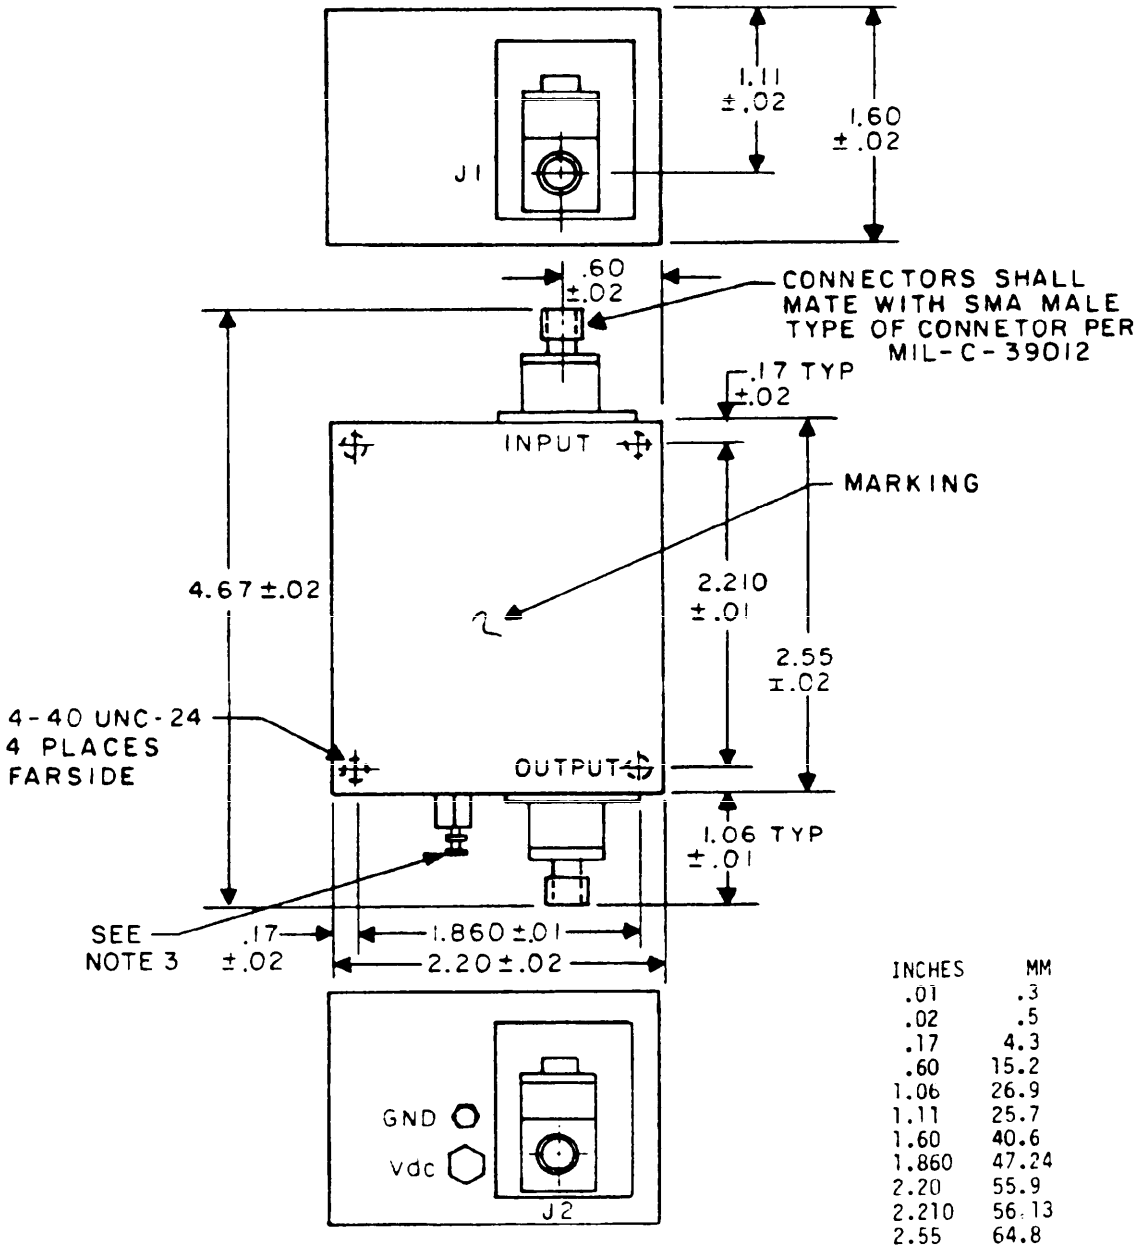

INCHES	MM
.01	.3
.02	.5
.17	4.3
.60	15.2
1.06	26.9
1.11	25.7
1.60	40.6
1.860	47.24
2.20	55.9
2.210	56.13
2.55	64.8
4.67	118.6

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Barrel diameter shall accept two turns of AWG NO. 24 wire.

FIGURE 2. Dimensions and configuration, dash number -02.

Source: https://assist.dla.mil -- Downloaded: 2026l0-20T20:21Z
Check the source to verify that this is the currentversion before use.

TABLE I. Electrical characteristics (25°C unless otherwise specified).

Dash number	Frequency range	DC input power		RF input power rating Max	Gain (dB) Min	Gain flatness (dB) Max	RF Output power (dBm) Min	VSWR Max		Noise figure (dB) Max	Intercept point (dBm) Min	Harmonic spurious rejection (dB)	1 dB bandwidth	Phase distortion (for pulse input) Max 1/	Group delay (N SEC)	Over drive recovery
		Voltage	Current Max					IN	OUT							
S1 01 S2 N	950- 1250 MHz	15 ±1%	150 mA	+16 dBm, 12 USEC pulse, PRR 25 kHz, 0.1 ERG spikes at 25 kHz Rep Rate	23.0 -.7 from test input to RF output	±0.5	+20 from -19°C to +25°C +19 from +25°C to +71°C	1.5:1	1.5:1	3 at 25°C 3-4 at +71°C	---	---	---	0.1° over 3 USEC Period 1.0° over 8 USEC period	1.7 ±0.5	---
S1 02 S2 N	9095- 9410 MHz	15±0.5% with ripple less than 100 mV	90 mA	+20 dBm, 0.2 USEC pulse, PRR 5 kHz, 0.5 ERG at 5 kHz	16	±0.5	+7.5	1.3:1	1.3:1	3.9	+17 ±2	50 for f less than 3100 MHz and greater than 20,000 MHz	315 MHz	---	---	To 65% of value within 3 USEC after removal of signal

1/ Use the general test procedures in 4.8.13.

Source: https://assist.dla.mil -- Downloaded: 20260-20T20:21Z
Check the source to verify that this is the current version before use.

TABLE II. Physical and environmental characteristics.

Dash number	Weight (lb) Max	Temperature range		Seal	Salt	EMI
		Operating case temp	Nonoperating			
01 S1 S2 N	0.55	0°C - +71°C	-54°C- +71°C	Nonhermetic	Applicable	CE03 of MIL-STD-461
02 S1 S2 N	1.1	0°C - +71°C	-57°C- +71°C	Nonhermetic	Applicable	CE03 of MIL-STD-461

REQUIREMENTS:

Dimensions and configuration: See figures 1 and 2.

Electrical characteristics: See table I.

Physical and environmental characteristics: See table II.

Part number: M28875 /3-(dash number from tables I and II).

NOTE: Amplifiers covered by this specification sheet are substitutable for the following manufacturer's or user's part number. This information in no way implies that the manufacturer's part is suitable as a substitute for the military part number.

Dash number	Manufacturer's code	Manufacturer's part number
01S	05869	723132-1
01S	51025	LD423402
02S	80063	SM-A-944860
02S	24539	SD7-0740M

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - OS, SH
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AV
Navy - AS, MC
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5985-0968-3)

☆U.S. GOVERNMENT PRINTING OFFICE: 1983 — 605-034/4000

Source: https://assist.dla.mil -- Downloaded: 20261O-20T20:21Z
Check the source to verify that this is the current version before use.