
MILITARY SPECIFICATION SHEET

AMPLIFIERS, RADIOFREQUENCY AND MICROWAVE, SOLID-STATE, LOGARITHMIC, COAXIAL CONFIGURATION

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring amplifiers described herein shall consist of this specification sheet and the latest issue of MIL-A-28875.

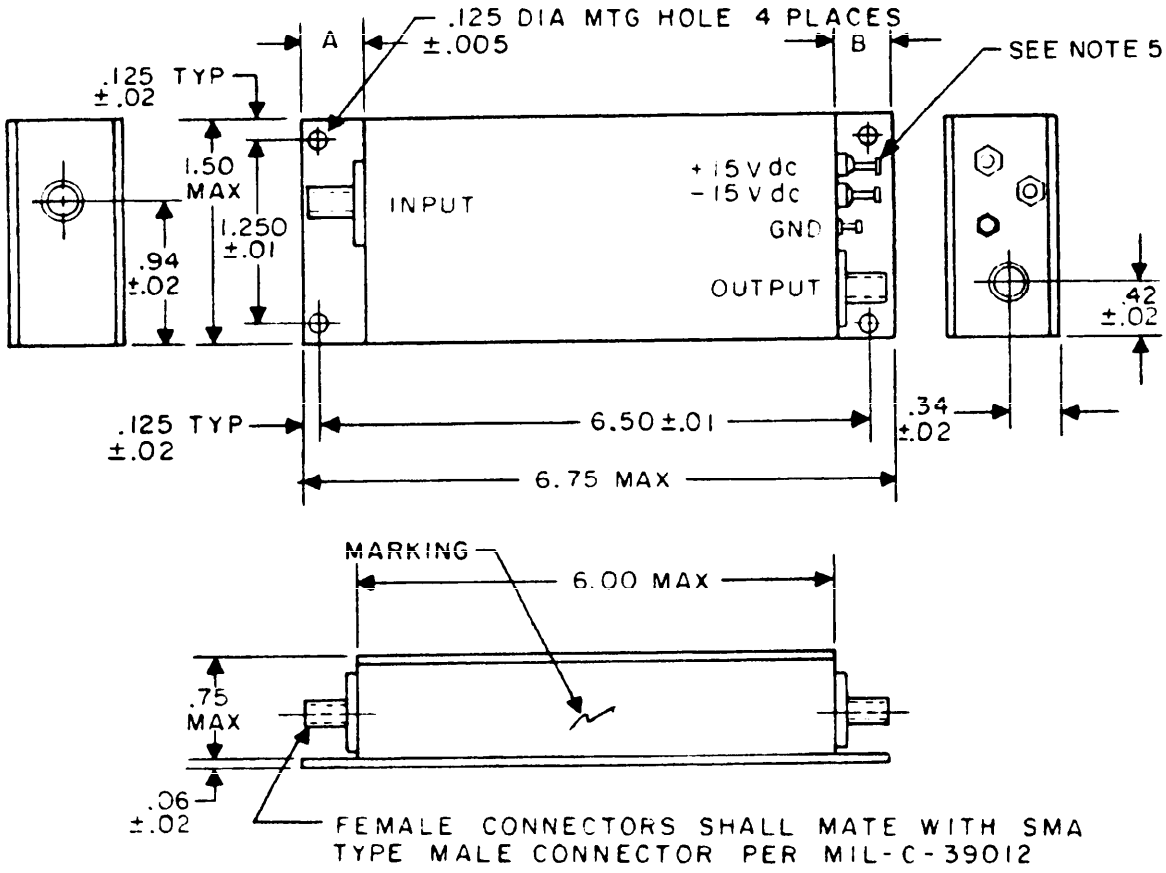

INCHES	MM
.005	.13
.01	.3
.02	.5
.06	1.5
.125	3.18
.34	8.6
.42	10.7
.75	19.1
.94	23.9
1.250	31.75
1.50	38.1
6.00	152.4
6.50	165.1
6.75	171.5

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The location of the ground and the DC input terminals with respect to J2 are optional.
4. A and B shall be equal within .020 (.51 mm) inch.
5. Barrel diameter shall accept two turns of AWG NO. 24 wire.

FIGURE 1. Dimensions and configuration, dash number -01.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:21Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Frequency range: 70 MHz ±3 MHz.

Bandwidth (-3 dB small signal): 10 MHz minimum.

DC input power:

+15 volts ±1% regulation, with less than 0.1% ripple.

-15 volts ±1% regulation, with less than 0.1% ripple.

100 mA max.

Input dynamic range: -80 dBm to 0 dBm.

Source characteristics impedance: 50 ohms.

Logarithmic accuracy: ±2 dB.

Logarithmic sensitivity: 21 MV/dB ±10%.

Output:

Video: 0 volt to 2 volts into a 50 ohms load, direct coupled.

Voltage: 0.83 volts ±10%, when a CW signal of -40 dBm at 69.12 MHz ±0.02 MHz is applied to the input.

VSWR (Input): 2.0:1 maximum.

Gain vs temperature (small signal): ±2 dB.

Output pulse response:

Rise time: 0.1 µs maximum.

Overshoot: 10% maximum.

Temperature range:

Operating: -18°C to +65°C (case temperature)

Nonoperating: -57°C to +71°C

Seal: Nonhermetic.

Salt spray: Test is required.

Part number: M28875 /4-01S1, 01S2, 01N

NOTE: Amplifiers covered by this specification sheet are substitutable for the following manufacturer's or user's part number. This information in no way implies that the manufacturer's part is suitable as a substitute for the military part number.

Dash number	Manufacturer's code	Manufacturer's part number
01S	49956	979807-1
01S	99313	ITL-7-70-10-50

Source: https://assist.dla.mil -- Downloaded: 202610-20T20:21Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - OS, SH
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AV
Navy - AS, MC
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5985-0968-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:21Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:21Z
Check the source to verify that this is the current version before use.