
MILITARY SPECIFICATION SHEET

AMPLIFIERS, RADIOFREQUENCY AND MICROWAVE, SOLID-STATE, POWER, WIDEBAND, COAXIAL CONFIGURATION

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring amplifiers described herein shall consist of this specification sheet and the latest issue of MIL-A-28875.

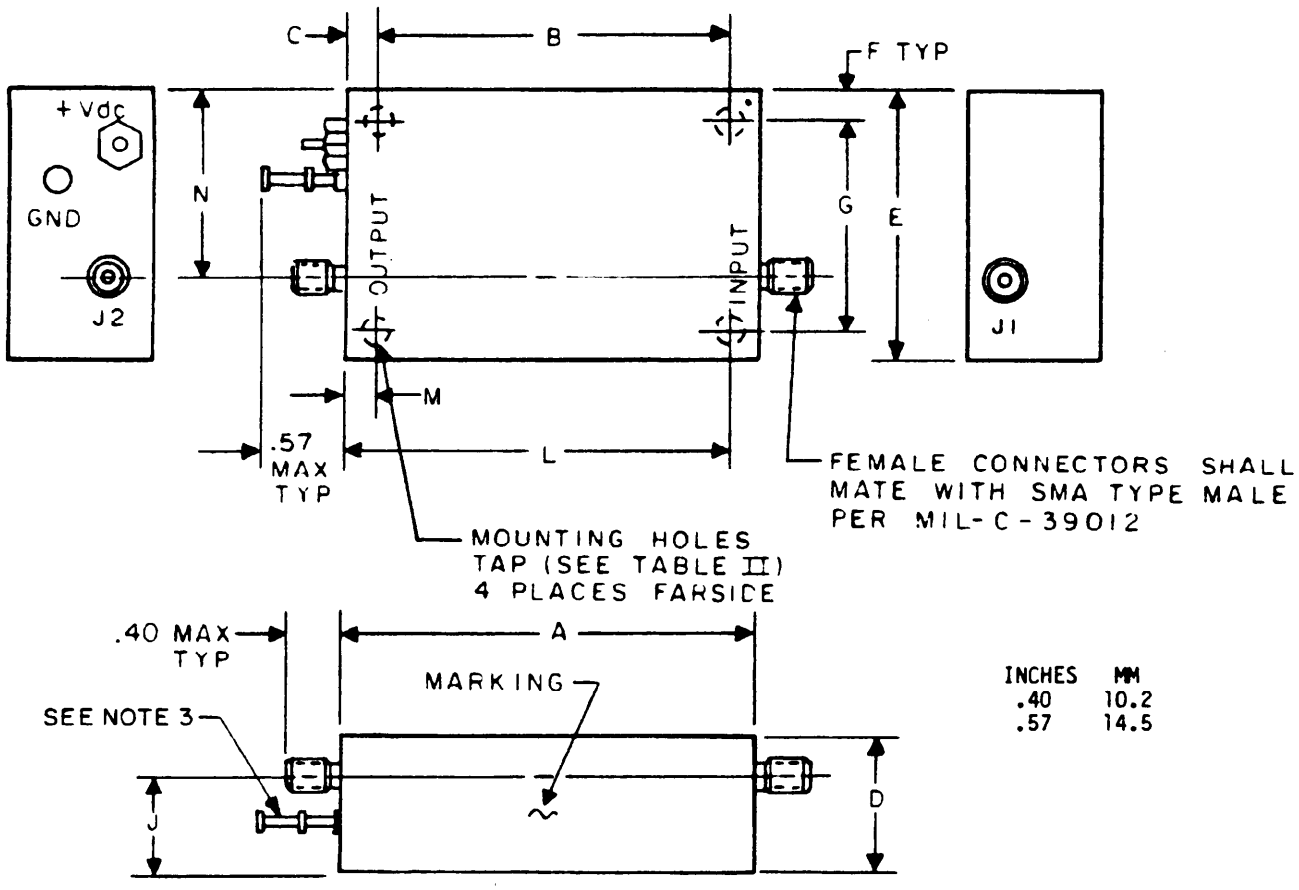



INCHES	MM
.40	10.2
.57	14.5

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Barrel diameter shall accept two turns of AWG NO. 24 wire.

FIGURE 1. Dimensions and configuration, dash numbers -02, -03, -04, and -05.

FSC 5985
Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:23Z
Check the source to verify that this is the current version before use.

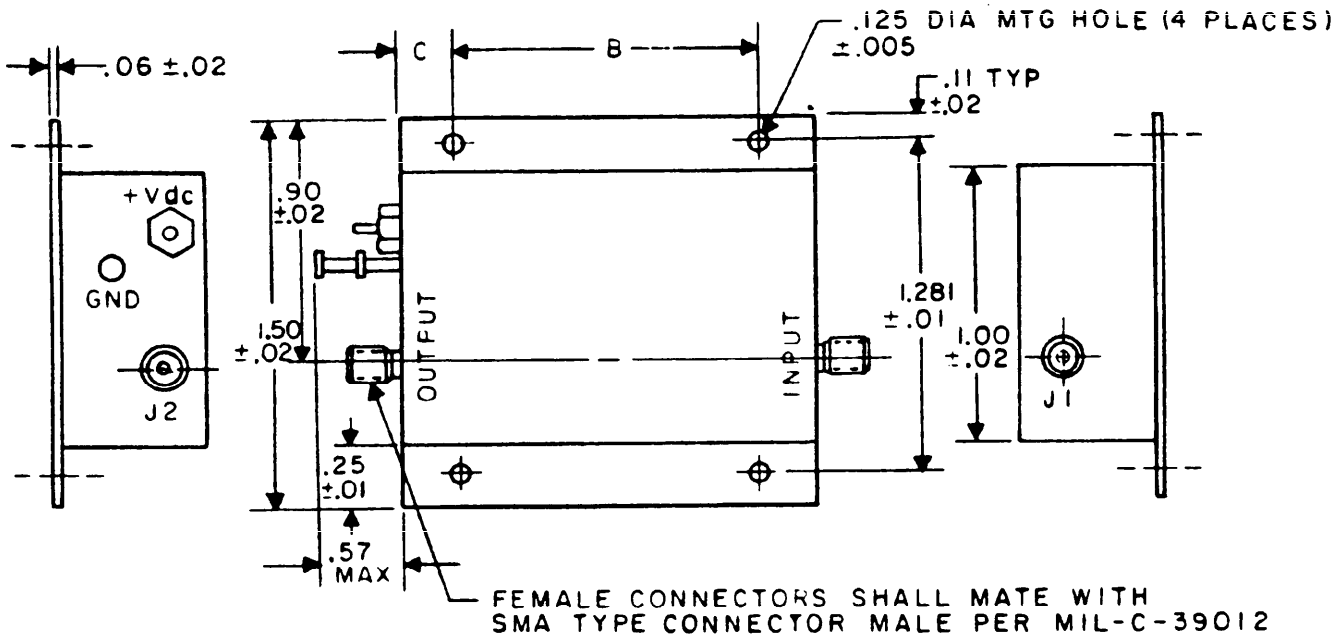

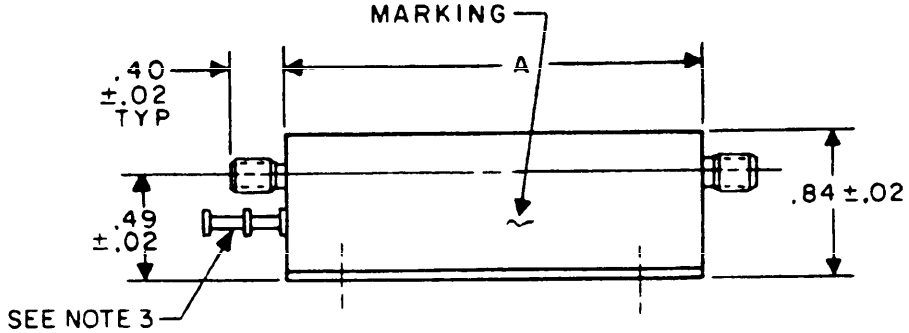

INCHES	MM
.005	.13
.01	.3
.02	.5
.06	1.5
.11	2.8
.125	3.18
.25	6.4
.40	10.2
.49	12.5
.57	14.5
.84	21.3
.90	22.9
1.00	25.4
1.281	32.5
1.50	38.1

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Barrel diameter shall accept two turns of AWG NO. 24 wire.

FIGURE 2. Dimensions and configuration, dash number -01.

Source: https://assist.dla.mil - Downloaded: 20260-20T20:23Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics (25°C unless otherwise specified).

Dash number		Frequency range	DC input power		Gain (dB) Min	Gain flatness (dB) Max	RF output power (dBm) Min	VSWR Max		Noise figure (dB) Max	Intercept point (dBm) Min	Harmonic output (dbc)	Gain vs temperature (dB)	RF input power (mW) Max
			Voltage	Current Max (mA)				IN	OUT					
01	S1	60-80MHz	15 ±1%	166	50	±1.5	+20	2.0:1	2.0:1	4.5	+33	---	±2	---
	S2													
	N													
02	S1	5-100MHz	28 ±1%	350	30	±1.0	+30	2.0:1	2.0:1	10	+40	-70	±1	100
	S2													
	N													
03	S1	5-500MHz	15 ±1%	88	9.5	±1.0	+20	2.0:1	2.0:1	7	+38	---	±1	100
	S2													
	N													
04	S1	500-1000 MHz	15 ±1%	200	33	±1.0	+20	2.0:1	2.0:1	5	+60	---	±1	100
	S2													
	N													
05	S1	1-2 GHz	20 ±1%	170	22	±1.0	+20	2.0:1	2.0:1	8	+31	-70	±1	100
	S2													
	N													

Source: https://assist.dla.mil -- Downloaded: 2026/10-20T20:23Z
Check the source to verify that this is the current version before use.

TABLE II. Mechanical, physical and environmental characteristic.

Dash number	Dimensions												Weight Max	Temperature range		Seal	Salt	EMI	Figure number
	A	B	C	D	E	F	G	H	J	K	L	M		Operating case temp	Nonoperating				
01 S1 S2 N	2.40 ±.02	2.000 ±.005	.200 ±.01	---	---	---	---	---	---	---	---	---	3.3 oz	-18/+63°C	-57/+71°C	Non-hermetic	Applicable	CE03 of MIL-STD-461	2
02 S1 S2 N	2.50 ±.02	2.313 ±.005	.090 ±.01	.75 ±.02	1.38 ±.02	.090 ±.02	1.188 ±.005	.880 ±.01	.26 ±.02	.086-56 UNC 2B X .15Dp	2.313 ±.01	.09 ±.02	3.3 oz	0°C/+55°C	-55/+100°C	Non-hermetic	Applicable	CE03 of MIL-STD-461	1
03 S1 S2 N	0.82 ±.02	0.320 ±.005	.250 ±.01	.50 ±.02	1.00 ±.02	.090 ±.02	.810 ±.005	.54 ±.01	.19 ±.02	2-56 UNC 2B X .15Dp	.460 ±.01	.180 ±.02	3.3 oz	-54/+95°C	-62/+125°C	Hermetic	N/A	CE03 of MIL-STD-461	1
04 S1 S2 N	3.00 ±.02	2.813 ±.005	.090 ±.02	.75 ±.02	1.38 ±.02	.095 ±.01	1.188 ±.005	.880 ±.01	.26 ±.02	086-56 UNC 2B X .15Dp	2.813 ±.01	.09 ±.02	3.3 oz	0°/+55°C	-55/+100°C	Non-hermetic	Applicable	CE03 of MIL-STD-461	1
05 S1 S2 N	3.00 ±.02	2.813 ±.005	.090 ±.02	.75 ±.02	1.38 ±.02	.090 ±.01	1.188 ±.005	.880 ±.01	.26 ±.02	086-56 UNC 2B X .15Dp	2.813 ±.01	.09 ±.02	3.3 oz	0°/+55°C	-55/+100°C	Non-hermetic	Applicable	CE03 of MIL-STD-461	1

Source: https://assist.dla.mil -- Downloaded: 2026-02-20T20:23Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table II.

Electrical characteristics: See table I.

Physical and environmental characteristics: See table II.

Part number: M28875 /9-(dash number from tables I and II).

NOTE: Amplifiers covered by this specification sheet are substitutable for the following manufacturer's or user's part number. This information in no way implies that the manufacturer's part is suitable as a substitute for the military part number.

Dash number	Manufacturer's code	Manufacturer's part number
01S	49956	979300-1
01S	24539	UT7-1140M
02S	18876	13052369
02S	51025	HD783601
03S	14482	WJ-CA59
04S	51025	APD644401
05S	18876	13052367
05S	51025	5734LS-2
05S	51025	LD673401

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - OS, SH
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AV
Navy - AS, MC
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5985-0968-9)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:23Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:23Z
Check the source to verify that this is the current version before use.