
MILITARY SPECIFICATION SHEET

AMPLIFIERS, RADIOFREQUENCY AND MICROWAVE, SOLID-STATE, WIDEBAND, TO CONFIGURATION

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring amplifiers described herein shall consist of this specification sheet and the latest issue of MIL-A-28875.

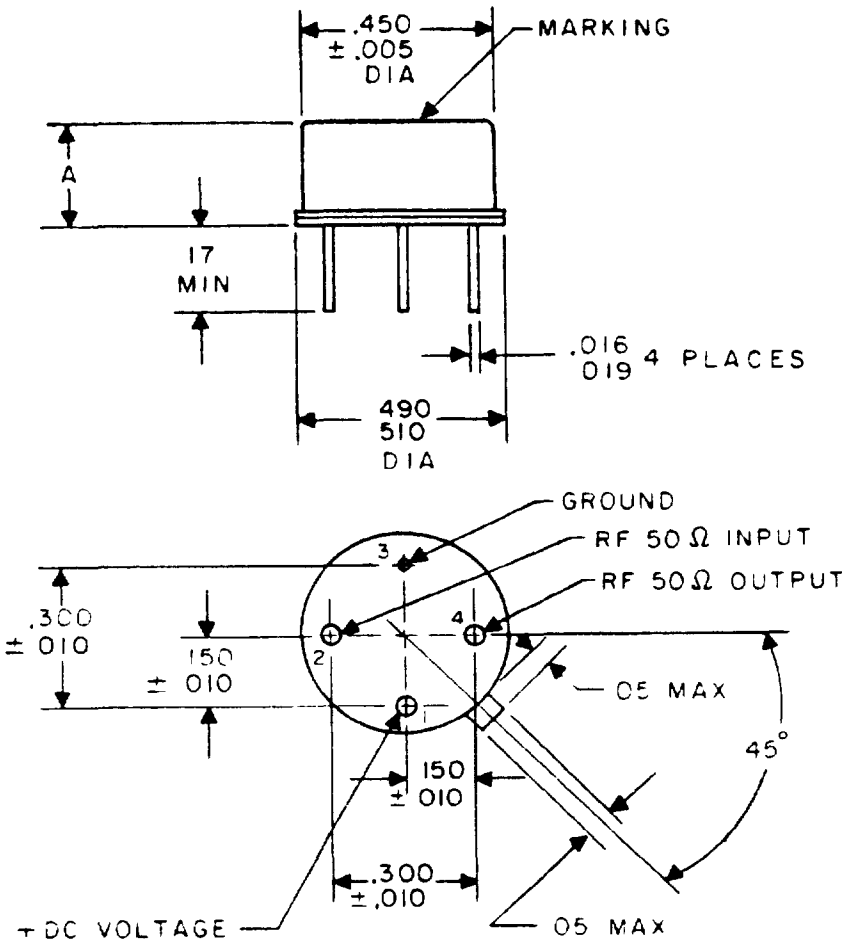

INCHES	MM
.005	.13
.010	.25
.016	.41
.019	.48
.05	1.3
.150	3.81
.17	4.3
.18	4.6
.21	5.3
.22	5.6
.26	6.6
.300	7.62
.450	11.43
.490	12.45
.510	12.95

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 1. Dimensions and configuration.

FSC 5985

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:23Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics (25°C unless otherwise specified).

Dash number	Frequency range (MHz)	DC input power		Gain (dB)	Gain flatness (dB)	RF output power (dBm)	VSWR Max		Noise figure (dB)	Intercept point 3rd order (dBm)	Harmonic output (dbc)	Gain vs tempera-ture (dB)	RF input power (dBm)	Isolation (dB)	Phase linearity (deg.)
		Voltage	Current Max (mA)	Min	Max	Min	IN	OUT	Max	Min				Min	Max
01 S1 S2 N	2-250	15 Nom	55	29	±1.0	+7	2.0:1	2.0:1	5.5	+17	---	+1.0	+60	---	---
02 S1 S2 N	2-250	15 Nom	98	13	±1.0	+20.0	2.0:1	2.0:1	7	+30	---	1.0	+13	---	---
03 S1 S2 N	5-250	15 ±1%	40	29	±1.0	+7.0	2.0:1	2.0:1	5.5	+21	---	1.0	+17	---	---
04 S1 S2 N	5-1000	15 ±1%	29	13	±1.0	+6.0	2.0:1	2.0:1	7	+21	---	1.0	+17	---	---
05 S1 S2 N	100-1000	15 ±1%	34	14	±1.0	+5.0	2.0:1	2.0:1	7	+18	---	1.0	+17	---	---

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:23Z
Check the source to verify that this is the current version before use.

TABLE II. Dimension, physical and environmental characteristics.

Dash number	Dimension A in inches (mm) Max.	Weight Max (Grams)	Temperature range		Burn-in temperature (case temp)	Seal	Salt
			Operating case temp	Nonoperating			
S1 01, S2 N	.22	3.1	-54/+100°C	-62/+125°C	+100°C	Hermetic	N/A
S1 02, S2 N	.22	3.1	-54/+100°C	-62/+125°C	+100°C	Hermetic	N/A
S1 03, S2 N	.22	3.1	-54/+100°C	-62/+125°C	+100°C	Hermetic	Applicable
S1 04, S2 N	.18	3.1	-54/+100°C	-62/+125°C	+125°C	Hermetic	N/A
S1 05, S2 N	.22	3.1	-54/+100°C	-62/+125°C	+125°C	Hermetic	N/A

REQUIREMENTS:

Dimensions and configuration. See figure 1 and table II.

Electrical characteristics: See table I.

Physical and environmental characteristics: See table II.

Part number M28875 /10-(dash number from tables I and II).

NOTE: Amplifiers covered by this specification sheet are substitutable for the following manufacturer's or user's part number. This information in no way implies that the manufacturer's part is suitable as a substitute for the military part number.

Dash number	Manufacturer's code	Manufacturer's part number
01S	33875	EE-F0034-001
01S	14482	WJ-A74-1S
01S	31091	AH-4613/74-1X
02S	33875	EE-F0034-002
02S	14482	WJ-A79S
02S	31091	AH-4614/79-X
03S	49956	954498-1
03S	14482	WJ-A74-1
04S	91417	132851-101
04S	24239	UTO-1002
04S	14482	WJ-A15
05S	14482	WJ-A34S

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:23Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - OS, SH
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AV
Navy - AS, MC
Air Force - 19

Agent:
DLA - ES

Preparing activity
Navy - EC

(Project 5985-0968-10)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:23Z
Check the source to verify that this is the current version before use.