
MILITARY SPECIFICATION SHEET

AMPLIFIERS, RADIOFREQUENCY AND MICROWAVE, SOLID-STATE, WIDEBAND, LOW PROFILE, TO CONFIGURATION

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring amplifiers described herein shall consist of this specification sheet and the latest issue of MIL-A-28875.

INCHES	MM
.005	.13
.010	.25
.016	.41
.019	.48
.031	.79
.17	4.3
.200	5.08
.202	5.13
.400	10.16
.550	13.97
.590	14.99
.610	15.49

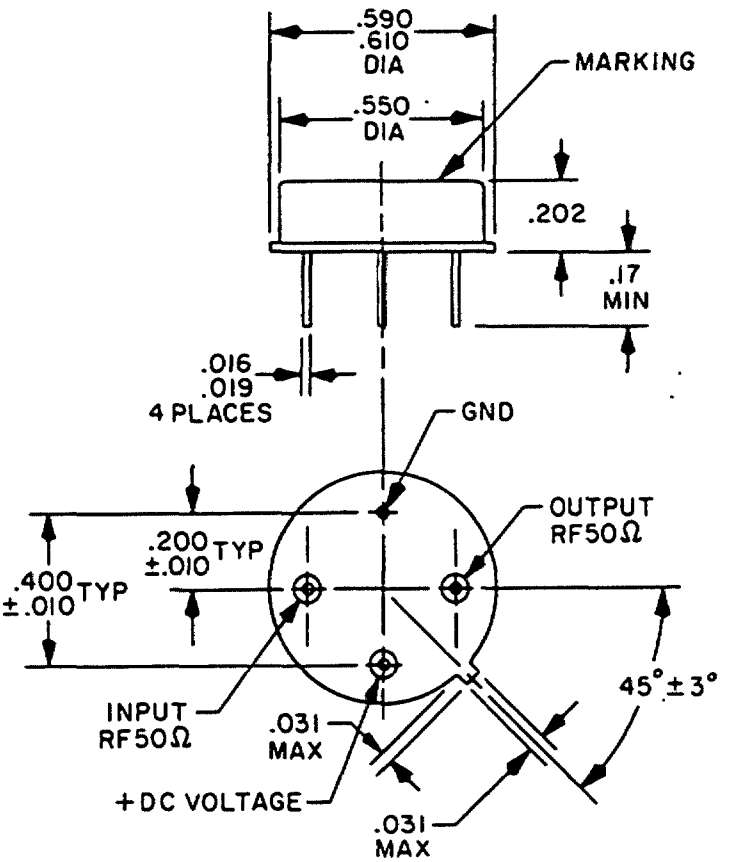

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005

FIGURE 1. Dimensions and configurations.

FSC 5985

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:24Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics (25°C unless otherwise specified).

Dash number		Frequency range (MHz)	DC input power		Gain (dB) Min	Gain flatness (dB) Max	RF output power (dBm) Min	VSWR Max		Noise figure (dB) Max	Intercept point 3rd order (dBm) Min	Harmonic output (dBc)	Gain vs temperature (dB)
			Voltage	Current Max (mA)				IN	OUT				
01	S1	5-500	15 ±1%	131	25	±.7	+20.5	2.0:1	2.0:1	4.5	+30	---	±1
	S2												
	N												
02	S1	5-500	15 ±1%	131	29	±0.7	+20	2.0:1	2.0:1	4.5	+30	---	±1
	S2												
	N												
03	S1	10-1000	15 ±1%	131	24.5	±0.7	+21	2.0:1	2.0:1	5.0	+29	---	±1
	S2												
	N												
04	S1	200-2000	15 ±1%	129	14.5	±1.0	+15.5	2.0:1	2.0:1	7.5	+20	---	±1
	S2												
	N												
05	S1	200-3000	15 ±1%	129	11.0	±1.0	+15.5	2.0:1	2.0:1	8.5	+20	---	±1
	S2												
	N												
06	S1	200-2000	15 ±1%	175	8.0	±1.0	+23.5	2.0:1	2.0:1	4.5	+32	---	±1
	S2												
	N												

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:24Z
Check the source to verify that this is the current version before use.

TABLE II. Dimension, physical and environmental characteristics.

Dash number	Weight Max (Grams)	Temperature range		Burn-in temperature (case temp)	Seal	Salt
		Operating case temp	Nonoperating			
01 S1 S2 N	10	-55/+85°C	-65/+125°C	+85°C	Hermetic	Applicable
02 S1 S2 N	10	-54/+85°C	-55/+125°C	+85°C	Hermetic	Applicable
03 S1 S2 N	10	-54/+85°C	-55/+125°C	+85°C	Hermetic	Applicable
04 S1 S2 N	10	-55/+85°C	-65/+125°C	+85°C	Hermetic	Applicable
05 S1 S2 N	10	-54/+85°C	-62/+125°C	+85°C	Hermetic	Applicable
06 S1 S2 N	10	-55/+85°C	-62/+125°C	+85°C	Hermetic	Applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:24Z
Check the source to verify that this is the current version before use.

REQUIREMENTS.

Dimensions and configuration: See figure 1 and table II.

Electrical characteristics: See table I.

Physical and environmental characteristics: See table II.

Part number: M28875 /12-(dash number from tables I and II).

NOTE: Amplifiers covered by this specification sheet are substitutable for the following manufacturer's or user's part number. This information in no way implies that the manufacturer's part is suitable as a substitute for the military part number.

Dash number	Manufacturer's code	Manufacturer's part number
01S	14482	WJ-RA89
02S	14482	WJ-RA89-1
03S	14482	WJ-RA69
04S	14482	WJ-RA38
05S	14482	WJ-RA46
06S	14482	WJ-RA37

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities.
Army - MI
Navy - OS, SH
Air Force - 11, 17, 99
DLA - ES

User activities.
Army - AV
Navy - AS, MC
Air Force - 19

Agent:
DLA - ES

Preparing activity.
Navy - EC

(Project 5985-0968-12)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:24Z
Check the source to verify that this is the current version before use.