INCH-POUND

MIL-DTL-28875/12A
24 August 2000
SUPERSEDING
MIL-A-28875/12
27 July 1983

DETAIL SPECIFICATION SHEET

AMPLIFIERS, RADIO-FREQUENCY AND MICROWAVE, SOLID-STATE, WIDEBAND, LOW PROFILE, TO CONFIGURATION

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the amplifiers described herein shall consist of this specification sheet and the latest revision of MIL-DTL-28875.

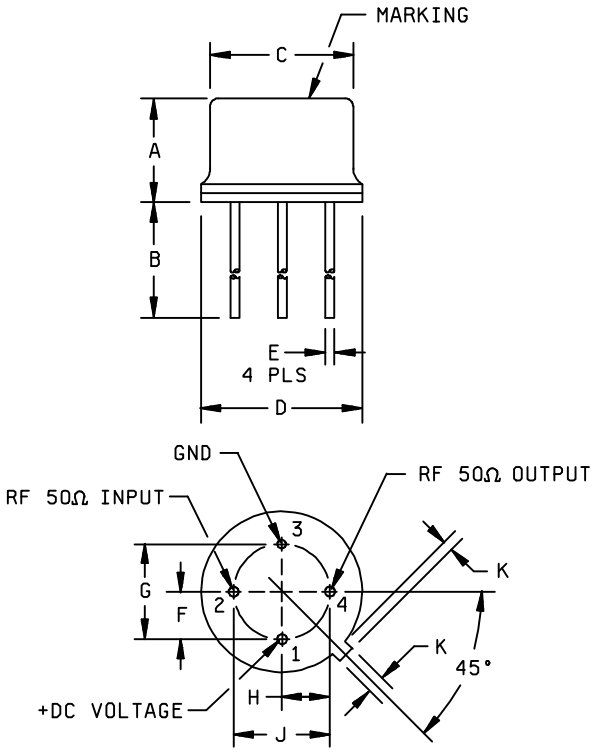

	Inches		Millimeters	
	Max	Min	Max	Min
A	.207	.197	5.26	5.00
B	---	.17	---	4.3
C	.555	.545	14.10	13.84
D	.610	.590	15.49	14.99
E	---	.17	---	4.3
F	.210	.190	5.33	4.83
G	.410	.390	10.41	9.91
H	.031	---	0.79	---

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only (1.00 inch = 25.4 mm).
3. Unless otherwise specified, tolerance is ±.005.

FIGURE 1. Dimensions and configuration.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:23Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics (25°C unless otherwise specified).

Dash No.	Frequency range (MHz)	DC input power		Gain (dB)	Gain flatness (dB)	RF output power (dBm)	VSWR Max		Noise figure (dB)	Intercept point 3rd order (dBm)	Harmonic output (dBc)	Gain versus temp. (dB)
		Voltage	Curr. Max (mA)	Min	Max	Min	IN	OUT	Max	Min		
S1 01 S2 N	5-500	+15 ±1%	131	25	±0.7	+20.5	2.0:1	2.0:1	4.5	+30	N/A	±1
S1 02 S2 N	5-500	+15 ±1%	131	29	±0.7	+20	2.0:1	2.0:1	4.5	+30	N/A	±1
S1 03 S2 N	10-1000	+15 ±1%	131	24.5	±0.7	+21	2.0:1	2.0:1	5.0	+29	N/A	±1
S1 04 S2 N	200-2000	+15 ±1%	129	14.5	±1.0	+15.5	2.0:1	2.0:1	7.5	+20	N/A	±1
S1 05 S2 N	200-3000	+15 ±1%	129	11.0	±1.0	+15.5	2.0:1	2.0:1	8.5	+20	N/A	±1
S1 06 S2 N	200-2000	+15 ±1%	175	8.0	±1.0	+23.5	2.0:1	2.0:1	4.5	+32	N/A	±1

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:23Z
Check the source to verify that this is the current version before use.

TABLE II. Dimension, physical and environmental characteristics.

Dash number	Mass Max (Grams)	Temperature range		Burn-in temperature (case temp)	Seal	Salt
		Operating case temp.	Non-operating			
01 S1 S2 N	10	-55/+85°C	-65/+125°C	+85°C	Hermetic	Applicable
02 S1 S2 N	10	-54/+85°C	-55/+125°C	+85°C	Hermetic	Applicable
03 S1 S2 N	10	-54/+85°C	-55/+125°C	+85°C	Hermetic	Applicable
04 S1 S2 N	10	-55/+85°C	-65/+125°C	+85°C	Hermetic	Applicable
05 S1 S2 N	10	-54/+85°C	-62/+125°C	+85°C	Hermetic	Applicable
06 S1 S2 N	10	-55/+85°C	-62/+125°C	+85°C	Hermetic	Applicable

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table II.

Electrical characteristics: See table I.

Physical and environmental characteristics: See table II.

Part number. M28875/12-(dash number from tables I and II).

Custodian:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Army - AV, MI
Navy - AS, MC, OS, SH
Air Force - 19, 99

Preparing activity:
DLA - CC

(Project 5985-1208-07)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:23Z
Check the source to verify that this is the current version before use.