INCH-POUND

MIL-DTL-28875/1B
15 June 2010
SUPERSEDING
MIL-DTL-28875/1A
24 August 2000

DETAIL SPECIFICATION SHEET

AMPLIFIERS, RADIO-FREQUENCY AND MICROWAVE, SOLID-STATE, NARROW-BAND, DIP CONFIGURATION

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the amplifiers described herein shall consist of this specification sheet and MIL-DTL-28875.

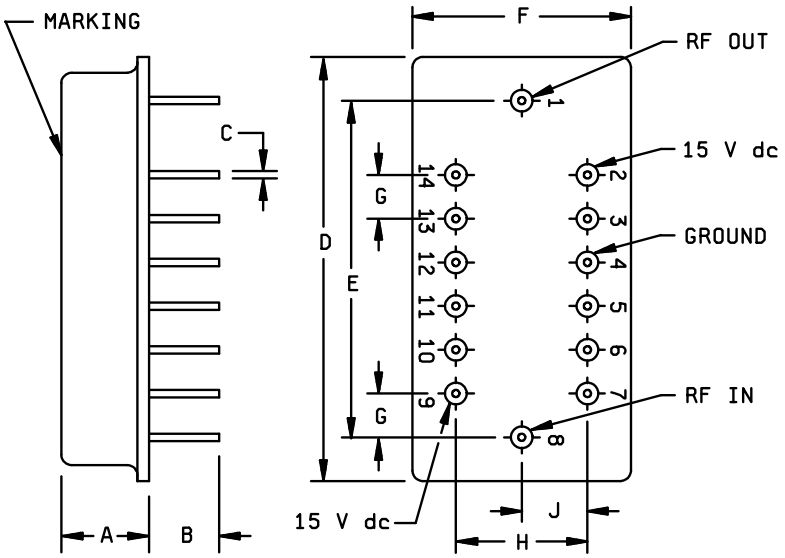

	Inches		Millimeters	
	Max	Min	Max	Min
A	.200	-	5.08	-
B	.185	.140	4.70	3.56
C	.019 dia	.016 dia	.48 dia	.41 dia
D	.980	.960	24.89	24.38
E	.780	.760	19.81	19.30
F	.508	.488	12.90	12.40
G	.110 typ	.090 typ	2.79 typ	2.29 typ
H	.310	.290	7.87	7.37
J	.160	.140	4.06	3.56

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only (1.00 in = 25.4 mm).
3. All unidentified pins are no connections.

FIGURE 1. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:20Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Frequency range: 3 to 4 GHz.

DC input power:

15 volts ± 1 percent.

80 mA maximum.

RF input power: Not greater than 7 dBm.

Gain: 5 dB minimum.

Gain flatness: ±0.5 dB maximum.

Power output: 11 dBm minimum.

VSWR: 1.5:1 maximum.

Noise figure: 9.5 dB maximum.

Third order intercept point: +21 dBm.

Operating temperature range: -54°C to +125°C (case temperature).

Vibration: Random test in accordance with requirement of MIL-DTL-28875.

Seal: Hermetic.

Salt spray: Test is required.

Explosion: Test is required.

Thermal shock: Temperature range -54°C to +85°C.

Electromagnetic interference:

RF leakage: 65 dB below the RF input signal level.

Susceptability: 65 dB of isolation between external RF fields and internal signal paths.

Part or Identifying number (PIN): M28875/1 -01S1 or -01S2 or -01N

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:20Z
Check the source to verify that this is the current version before use.

Referenced documents. This specification sheet only references MIL-DTL-28875.

The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA – CC
Project number (5996-2010-001)

Review activities:
Army - AV, MI
Navy - AS, MC, OS, SH
Air Force - 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:20Z
Check the source to verify that this is the current version before use.