
MILITARY SPECIFICATION SHEET

AMPLIFIERS, RADIOFREQUENCY AND MICROWAVE, SOLID-STATE, POWER, WIDEBAND, TO CONFIGURATION

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring amplifiers described herein shall consist of this specification sheet and the latest issue of MIL-A-28875.

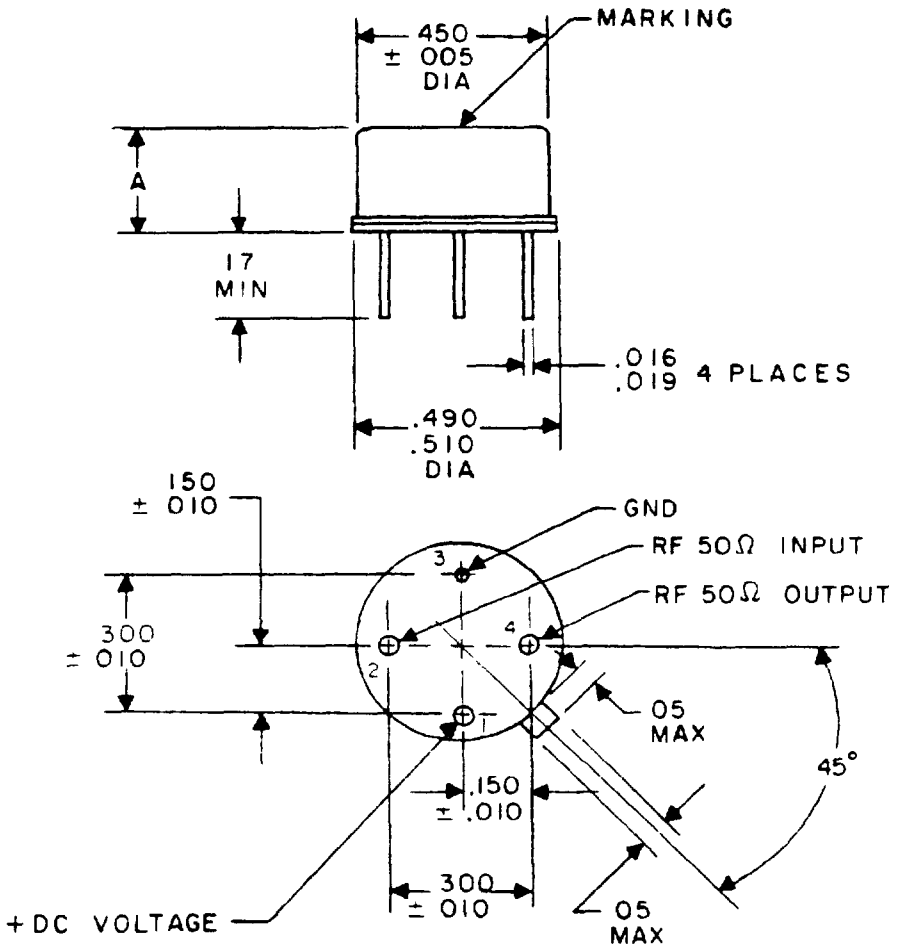

INCHES	MM
.005	.13
.010	.25
.016	.41
.019	.48
.05	1.3
.150	3.81
.17	4.3
.18	4.6
.21	5.3
.22	5.6
.26	6.6
.300	7.62
.450	11.43
.490	12.45
.510	12.95

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 1. Dimensions and configuration.

FSC 5985

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:22Z
Check the source to verify that this is the current version before use.

TABLE I Electrical characteristics (25°C unless otherwise specified)

Dash number		Frequency range (MHz)	DC input power Voltage	DC input power Current Max (mA)	Gain (dB) Min	Gain flatness (dB) Max	RF output power (dBm) Min	VSWR Max IN	VSWR Max OUT	Noise figure (dB) Max	Intercept point 3rd order (dBm) Min	Harmonic output (dbc)	Gain vs temperature (dB)	RF input power (mW) Max	Isolation (dB) Min	Phase linearity (deg) Max
01	S1 S2 N	10-400	15 ±1%	35	12	±1 0	+10	2 0 1	2 0·1	7.5	+21	---	±1	32	---	---
02	S1 S2 N	2-500	15 ±1%	65	12	±0.7	+14	2 0 1	2 0 1	7.0	+25	---	±1	---	---	---
03	S1 S2 N	5-500	24 ±1%	50	9	±1.0	+13	2 0 1	2.0 1	7.0	+27	---	±1	---	---	---
04	S1 S2 N	5-500	15 ±1%	80	23	±1 0	+12	2.0·1	2 0 1	7.0	+25	---	±1	---	---	+1
05	S1 S2 N	5 500	15 ±1%	48	15	±1 0	+13	2.0·1	2 0 1	6.0	+28	---	±1	---	---	---
06	S1 S2 N	5 500	15 ±1%	50	16	±1.0	+17	2.5 1	2.5 1	6 0	+26	---	±1	---	---	---
07	S1 S2 N	10-500	15 ±1%	121	14	±1.0	+22	2.0 1	2.0 1	9.0	+35	---	±1	---	---	---
08	S1 S2 N	10-500	15 ±1%	105	9	±1.0	+22	2 0 1	2 0:1	9.0	+30	---	±1	---	---	---
09	S1 S2 N	10-1000	15 ±1%	114	5.5	±1 3	+19	2.2 1	2 2 1	12 5	+34	---	±1	100	---	---
10	S1 S2 N	10-1500	15 ±1%	45	9.5	±1.0	+13 5	2.0 1	2.0·1	7.5	+29	---	±1	20	---	---
11	S1 S2 N	10-1500	15 ±1%	95	3	±1.2	+19	2.5 1	2.5 1	13.5	+32	---	±1	80	---	---

1/ Both RF input and output pins are at dc ground
2/ RF input is at dc ground

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:22Z
Check the source to verify that this is the current version before use.

TABLE II. Dimension, physical and environmental characteristics.

Dash number	Dimension A in inches (mm) Max.	Weight, Max (Grams)	Temperature range		Burn-in temperature (case temp)	Seal	Salt
			Operating case temp.	Nonoperating			
01 S1 S2 N	.26	1.9	-55/+100°C	-65/+125°C	+125°C	Hermetic	N/A
02 S1 S2 N	.18	1.9	-54/+85°C	-55/+125°C	+100°C	Hermetic	N/A
03 S1 S2 N	.18	1.9	-54/+85°C	-55/+125°C	+100°C	Hermetic	N/A
04 S1 S2 N	.21	1.9	-55/+110°C	-65/+125°C	+110°C	Hermetic	N/A
05 S1 S2 N	.21	1.9	-54/+85°C	-62/+125°C	+100°C	Hermetic	N/A
06 S1 S2 N	.21	1.9	-55/+85°C	-62/+100°C	+95°C	Hermetic	N/A
07 S1 S2 N	.18	1.9	-54/+71°C	-62/+100°C	+71°C	Hermetic	N/A
08 S1 S2 N	.18	1.9	-54/+85°C	-62/+125°C	+100°C	Hermetic	N/A
09 S1 S2 N	.21	1.9	-54/+85°C	-62/+125°C	+100°C	Hermetic	N/A
10 S1 S2 N	.21	1.9	-54/+85°C	-62/+125°C	+100°C	Hermetic	N/A
11 S1 S2 N	.21	1.9	-54/+85°C	-62/+125°C	+95°C	Hermetic	N/A

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table II.

Electrical characteristics See table I.

Physical and environmental characteristics: See table II.

Part number: M28875 /8-(dash number from tables I and II).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:22Z
Check the source to verify that this is the current version before use.

NOTE: Amplifiers covered by this specification sheet are substitutable for the following manufacturer's or user's part number. This information in no way implies that the manufacturer's part is suitable as a substitute for the military part number.

Dash number	Manufacturer's code	Manufacturer's part number
01S	31091	AH-592
02S	57958	5054882-2
02S	24539	UTO-515R
03S	57958	5054882-1
03S	24539	UTO-503
04S	18876	13052390
04S	91417	132843
04S	14882	WJ-A76S
04S	24539	UTO-523R
05S	57958	5054841-4
05S	24539	UTO-533R
06S	21912	AM-147
07S	57958	5054891-3
07S	24539	UTO-507R
08S	57958	5054841-2
08S	24539	UTO-596R
09S	57958	5054349-1
09S	14482	WJ-A19
10S	14482	WJ-A28S
11S	14482	WJ-A29S

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities
Army - MI
Navy - OS, SH
Air Force - 11, 17, 99
DLA - ES

User activities
Army - AV
Navy - AS, MC
Air Force - 19

Agent:
DLA - ES

Preparing activity.
Navy - EC

(Project 5985-0968-8)

/8

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:22Z
Check the source to verify that this is the current version before use.