INCH-POUND

MIL-DTL-28875/8B
15 June 2010
SUPERSEDING
MIL-DTL-28875/8A
24 August 2000

DETAIL SPECIFICATION SHEET

AMPLIFIERS, RADIO-FREQUENCY AND MICROWAVE, SOLID-STATE, POWER, WIDEBAND, TO CONFIGURATION

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the amplifiers described herein shall consist of this specification sheet and MIL-DTL-28875.

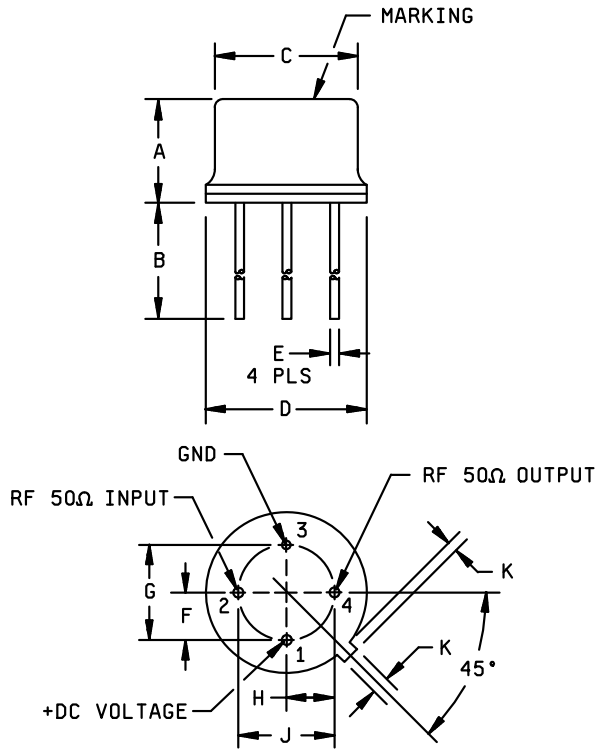

	Inches		Millimeters	
	Max	Min	Max	Min
B	N/A	.17	N/A	4.32
C	.455	.445	11.56	11.30
D	.510	.490	12.95	12.45
E	.019	.016	.48	.41
F	.160	.140	4.06	3.56
G	.310	.290	7.87	7.37
H	.160	.140	4.06	3.56
J	.310	.290	7.87	7.37
K	.05	N/A	1.3	N/A

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only (1.00 inch = 25.4 mm).

FIGURE 1. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:22Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics (25°C unless otherwise specified).

Dash No.	Freq. range	DC input power		Gain (dB)	Gain flatness (dB)	RF output power (dBm)	VSWR Max		Noise figure (dB)	Intercept point 3rd order (dBm)	Harmonic output (dBc)	Gain versus temp. (dB)	RF input power (mW)	Iso-lation (dB)	Phase linearity (deg)
	(MHz)	Voltage	Curr. Max (mA)	Min	Max	Min	IN	OUT	Max	Min			Max	Min	Max
S1 01 S2 N	10-400	+15 ±1%	35	12	±1.0	+10	2.0:1	2.0:1	7.5	+21	N/A	±1	32	N/A	N/A
S1 02 S2 N	2-500	+15 ±1%	65	12	±0.7	+14	2.0:1	2.0:1	7.0	+25	N/A	±1	N/A	N/A	N/A
S1 03 S2 N	5-500	+24 ±1%	50	9	±1.0	+13	2.0:1	2.0:1	7.0	+27	N/A	±1	N/A	N/A	N/A
S1 04 S2 N	5-500	+15 ±1%	80	23	±1.0	+12	2.0:1	2.0:1	7.0	+25	N/A	±1	N/A	N/A	N/A
S1 05 S2 N	5-500	+15 ±1%	48	15	±1.0	+13	2.0:1	2.0:1	6.0	+28	N/A	±1	N/A	N/A	N/A
S1 06 S2 N	5-500	+15 ±1%	50	16	±1.0	+17	2.5:1	2.5:1	6.0	+26	N/A	±1	N/A	N/A	N/A
S1 07 S2 N	10-500	+15 ±1%	121	14	±1.0	+22	2.0:1	2.0:1	9.0	+35	N/A	±1	N/A	N/A	N/A
S1 08 S2 N	10-500	+15 ±1%	105	9	±1.0	+22	2.0:1	2.0:1	9.0	+30	N/A	±1	N/A	N/A	N/A
S1 09 S2 N	10-1000	+15 ±1%	114	5.5	±1.3	+19	2.2:1	2.2:1	12.5	+34	N/A	±1	100	N/A	N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:22Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics (25°C unless otherwise specified) - Continued.

Dash No.	Freq. range	DC input power		Gain (dB)	Gain flatness (dB)	RF output power (dBm)	VSWR Max		Noise figure (dB)	Inter-cept point 3rd order (dBm)	Har-monic output (dBc)	Gain versus temp. (dB)	RF input power (mW)	Iso-lation (dB)	Phase Linear. (deg)
	(MHz)	Voltage	Curr. Max (mA)	Min	Max	Min	IN	OUT	Max	Min			Max	Min	Max
S1 10 S2 N	10-1500	+15 ±1%	45	9.5	±1.0	+13.5	2.0:1	2.0:1	7.5	+29	N/A	±1	20	N/A	N/A
S1 11 S2 N	10-1500	+15 ±1%	95	3	±1.2	+19	2.5:1	2.5:1	13.5	+32	N/A	±1	80	N/A	N/A

1/ Both RF input and output pins are at dc ground.
2/ RF input is at dc ground.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:22Z
Check the source to verify that this is the current version before use.

TABLE II. Dimension, physical and environmental characteristics.

Dash number	Dimension A in inches (mm) Max	Mass Max (Grams)	Temperature range		Burn-in temperature (case temp)	Seal	Salt
			Operating case temp	Nonoperating			
01 S1 S2 N	.26 (6.6)	1.9	-55/+100°C	-65/+125°C	+125°C	Hermetic	N/A
02 S1 S2 N	.18 (4.6)	1.9	-54/+85°C	-55/+125°C	+100°C	Hermetic	N/A
03 S1 S2 N	.18 (4.6)	1.9	-54/+85°C	-55/+125°C	+100°C	Hermetic	N/A
04 S1 S2 N	.21 (5.3)	1.9	-65/+110°C	-65/+125°C	+110°C	Hermetic	N/A
05 S1 S2 N	.21 (5.3)	1.9	-54/+85°C	-62/+125°C	+100°C	Hermetic	N/A
06 S1 S2 N	.21 (5.3)	1.9	-55/+85°C	-62/+100°C	+95°C	Hermetic	N/A
07 S1 S2 N	.18 (4.6)	1.9	-54/+71°C	-62/+100°C	+71°C	Hermetic	N/A
08 S1 S2 N	.18 (4.6)	1.9	-54/+85°C	-62/+125°C	+100°C	Hermetic	N/A
09 S1 S2 N	.21 (5.3)	1.9	-54/+85°C	-62/+125°C	+100°C	Hermetic	N/A
10 S1 S2 N	.21 (5.3)	1.9	-54/+85°C	-62/+125°C	+100°C	Hermetic	N/A
11 S1 S2 N	.21 (5.3)	1.9	-54/+85°C	-62/+125°C	+95°C	Hermetic	N/A

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table II.

Electrical characteristics: See table I.

Physical and environmental characteristics: See table II.

Part number. M28875/8-(dash number from tables I and II).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:22Z
Check the source to verify that this is the current version before use.

Referenced documents. This specification sheet only references MIL-DTL-28875.

The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5996-2010-003)

Review activities:
Army - AV, MI
Navy - AS, MC, OS, SH
Air Force - 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:22Z
Check the source to verify that this is the current version before use.