
INCH-POUND
MIL-PRF-28876/1F
1 March 2021
SUPERSEDING
MIL-PRF-28876/1E
4 October 2004

PERFORMANCE SPECIFICATION SHEET

CONNECTORS, FIBER OPTIC, CIRCULAR, RECEPTACLE STYLE, MULTIPLE REMOVABLE TERMINI, SCREW THREADS, WALL MOUNTING, WITHOUT BACKSHELL, ENVIRONMENT RESISTING

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-28876.

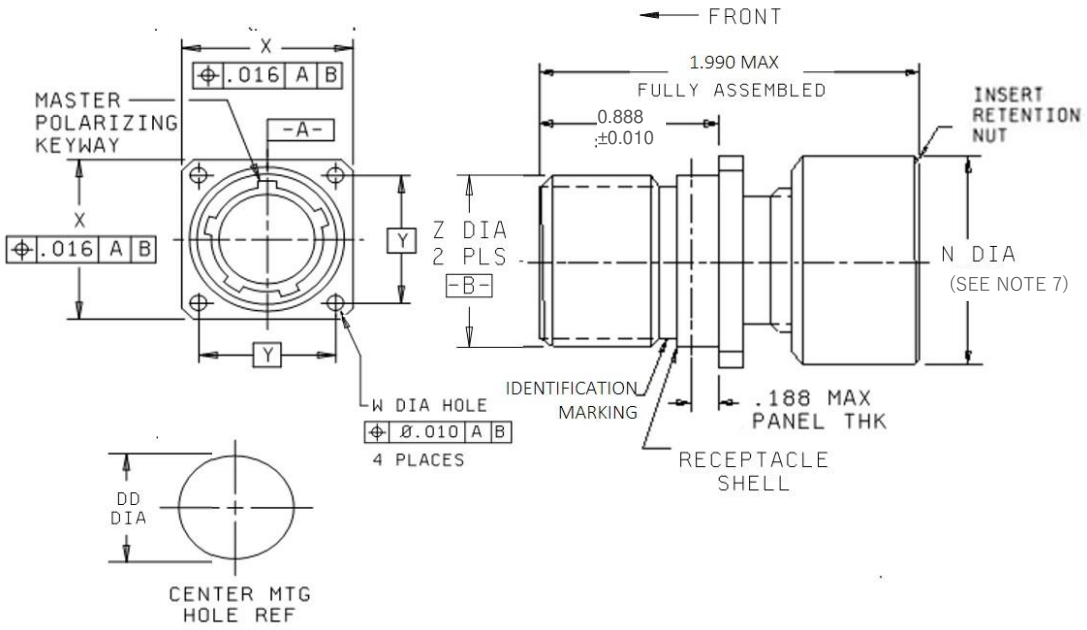

Inches	Millimeters
0.010	0.25
0.016	0.41
0.115	2.92
0.188	4.78
0.888	22.56
1.990	50.55

FIGURE 1. Wall mounting receptacle connector.

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:27Z
Check the source to verify that this is the current version before use.

Shell size	W dia	X	Y	Z dia max	DD dia +/-0.005	Insert figure 1/
11	0.130 (3.30)	1.043 (26.49)	0.750 (19.05)	0.750 (19.05)	0.812 (20.62)	B-1
	0.115 (2.92)	1.001 (25.43)				
13	0.130 (3.30)	1.158 (29.41)	0.843 (21.41)	0.875 (22.22)	0.937 (23.80)	B-2
	0.115 (2.92)	1.116 (28.35)				
15	0.130 (3.30)	1.278 (32.46)	0.968 (24.59)	1.062 (26.97)	1.124 (28.55)	B-3 or B-4
	0.115 (2.92)	1.236 (31.39)				
23	0.130 (3.30)	1.738 (44.14)	1.281 (32.54)	1.500 (38.10)	1.562 (39.68)	B-5 or B-6
	0.115 (2.92)	1.698 (43.13)				

FOOTNOTE:

1/ For insert arrangement, see the indicated figure in Appendix B of MIL-PRF-28876.

NOTES:

1. Dimensions are in inches.
2. Metric equivalents (mm) are given in parentheses for general information only.
3. Dimensions apply to plated/finished part.
4. Identification marking shall be in accordance with 3.10.3 of MIL-PRF-28876.
5. Connector insert retention nut internal configuration not shown. The insert retention nut shall be in accordance with figure A-8 of MIL-PRF-28876.
6. See appendix A of MIL-PRF-28876 for second location of Z DIA and dimensioning.
7. See appendix A of MIL-PRF-28876 for N DIA dimensioning.

FIGURE 1. Wall mounting receptacle connector - Continued.

REQUIREMENTS:

Dimensions and keying configurations. See figure 1 herein and figures A-2, A-3, A-5, and A-6 of MIL-PRF-28876.

Shell polarization. 1 through 6 keyway positions (see figure A-3 of MIL-PRF-28876).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:27Z
Check the source to verify that this is the current version before use.

Weight (without termini).

Shell size	Weight, ounces (grams) max
11	2.0 (56.7)
13	2.5 (70.875)
15	3.0 (85.05)
23	4.3 (121.905)

Fiber optic cable diameter. 0.094 inch (2.39 millimeters), maximum (to each termini location)

Protective caps. Each connector shall be supplied with protective caps over the front and rear portions of the connector.

Insert arrangement. See Appendix B of MIL-PRF-28876 for desired shell size.

Termini. Style P (pin) or S (socket) (see MIL-PRF-29504/14 and MIL-PRF-29504/15). (For dummy terminus, see MIL-PRF-29504/3).

Insert retention nut. Unless otherwise specified in the Part or Identifying Number (PIN), the insert retention nut and integral or separate insert retaining sleeve is supplied with the connector.

Class designator. Unless otherwise specified in the PIN, shall be aluminum with non-conductive finish.

PIN. Marked on flange of receptacle (see table I).

M	**28876**	**/1**	**X**	**X**	**X**	**X**	**X**	**X**
Prefix for military specification	Spec number	Spec sheet no.	Shell size designator (see table I)	Insert arrangement number (see table I)	Terminus/ insert style (see table I)	Key position number (see table I)	Backshell designator (see table I)	Class designator (see table I)

TABLE I. PIN designators.

Shell size	Shell size designator	Insert arrangement number	Terminus/ insert style	Key position	Backshell designator (see table II)	Class designator (see table III)
11	A	1	P or S	1, 2, 3, 4, 5, or 6	N or blank	T or blank
13	B	1	P or S	1, 2, 3, 4, 5, or 6	N or blank	T or blank
15	C	1 or 2	P or S	1, 2, 3, 4, 5, or 6	N or blank	T or blank
23	F	1 or 2	P or S	1, 2, 3, 4, 5, or 6	N or blank	T or blank

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:27Z
Check the source to verify that this is the current version before use.

TABLE II. Backshell designators.

Backshell designator	Receptacle configured with
Blank	Insert retention nut[1]
N	No insert retention nut

NOTE:
1. Including integral or separate insert retaining sleeve

TABLE III. Class designators.

Class designator	Description
Blank	Aluminum with non-conductive finish
T	Aluminum with conductive plating

Example: M28876/1B1S1N

Mating counterpart. Plug connectors are specified in MIL-PRF-28876/6 through MIL-PRF-28876/9. Dust covers are specified in MIL-PRF-28876/15.

Installation and removal tools. As specified in Drawing 499-6872813.

For qualification, conformance, and periodic inspections, dummy termini shall be used in all unused cavities.

NOTES:

Referenced documents. In addition to MIL-PRF-28876, this specification sheet references the following documents:

MIL-PRF-28876/6	MIL-PRF-28876/7	MIL-PRF-28876/8
MIL-PRF-28876/9	MIL-PRF-28876/15	MIL-PRF-29504/14
MIL-PRF-29504/15	MIL-PRF-29504/3	Drawing 499-6872813

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:27Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – SH
Air Force – 85
DLA – CC

Preparing activity:
Navy – SH
(Project 6060-2014-024)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T20:27Z
Check the source to verify that this is the current version before use.