
INCH-POUND
MIL-DTL-3661/11C
7 July 2024
SUPERSEDING
MIL-L-3661/11B
9 June 1969

DETAIL SPECIFICATION SHEET

LAMPHOLDERS, INDICATOR LIGHTS, INDICATOR-LIGHT HOUSINGS AND INDICATOR-LIGHT LENSES, (FLAT, ROTATABLE) DUST-TIGHT, LENS, STYLE LC11

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-3661.

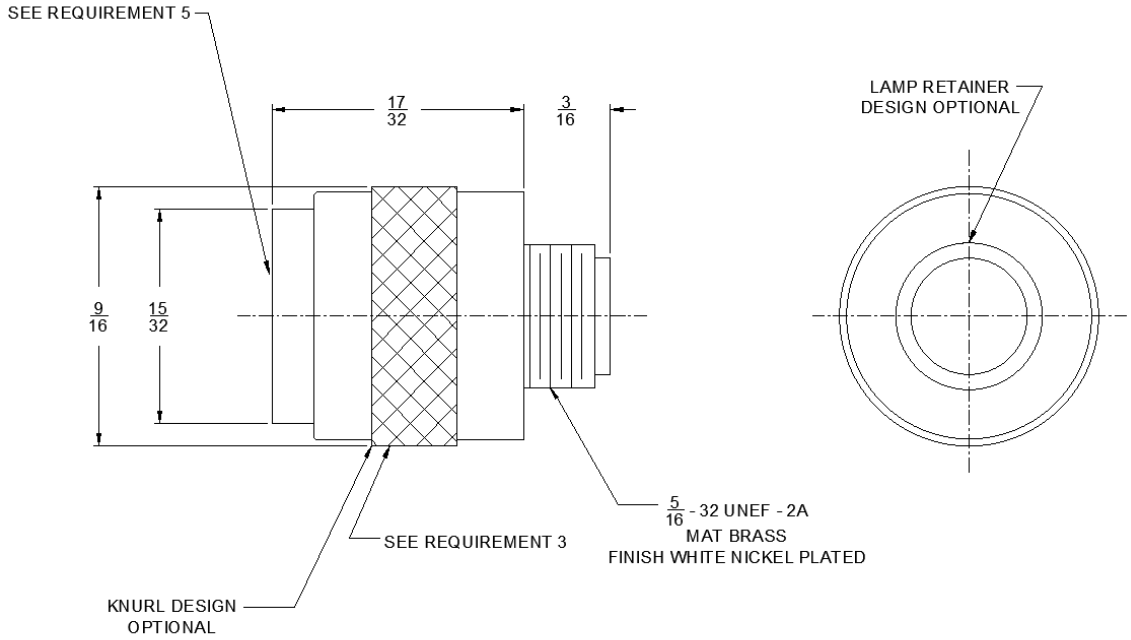

Inches	mm
3/16	4.76
5/16	7.94
15/32	11.91
17/32	13.49
9/16	14.29

FIGURE 1. Design and construction

AMSC N/A
FSC 6210

DISTRIBUTION STATEMENT A: Approved for public release; Distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:52Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches. Unless otherwise specified, tolerances are all ±1/32 inch for fractions.
2. Metric equivalents (to the nearest 0.01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

REQUIREMENTS:

1. Design and construction: See figure 1.
2. Lens design: Shall be orientable.
3. Lens holder material shall be aluminum and the finish shall be black anodize.
4. The lens shall accommodate on T-1-3/4 midget flange base incandescent lamp.
5. Numbers and letters may be hot stamped on lens face in accordance with the “Ordering data” paragraph of MIL-DTL-3661. Legend information:
   (a) Size of type for legend:

Number of characters	Character height nearest fraction	Type size
	(Inch)	(Points)
One	13/64	18
Two	11/64	14
Three	9/64	12
Four	5/64	8

   (b) Maximum number of digits: Two lines, 4 digits per line, 8 point type size.
   (c) Hot stamping standard: Black letters, white, red, green, blue, or silver, can be supplied on request.
6. Temperature cycling: -55°C to +71°C.
7. Sand and dust: (Dust-tight).

TABLE I: Designations and characteristics

Type designation	Mating holder	Lens material	Transmittance	Lens color
LC11RN2	LH73/1[3]	Plastic	Nondiffusing	Red
LC11GN2	LH73/1[3]	Plastic	Nondiffusing	Green
LC11YN2	LH73/1[3]	Plastic	Nondiffusing	Yellow
LC11BN2	LH73/1[3]	Plastic	Nondiffusing	Blue
LC11CN2	LH73/1[3]	Plastic	Nondiffusing	Colorless
LC11RT2	LH73/1[3]	Plastic	Translucent	Red
LC11GT2	LH73/1[3]	Plastic	Translucent	Green
LC11YT2	LH73/1[3]	Plastic	Translucent	Yellow
LC11BT2	LH73/1[3]	Plastic	Translucent	Blue
LC11WT2	LH73/1[3]	Plastic	Translucent	White
LC11GD2[1]	LH73/1[3]	Plastic	Diffusing	Green
LC11RD2[1]	LH73/1[3]	Plastic	Diffusing	Red
LC11RB2[2]	LH73/1[3]	Plastic	Translucent	Red

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:52Z
Check the source to verify that this is the current version before use.

TABLE I: Designations and characteristics – Continued

Type designation	Mating holder	Lens material	Transmittance	Lens color
LC11GR2[2]	LH73/1[3]	Plastic	Translucent	Green
LC11YB2[2]	LH73/1[3]	Plastic	Translucent	Yellow
LC11BB2[2]	LH73/1[3]	Plastic	Translucent	Blue
LC11WB2[2]	LH73/1[3]	Plastic	Translucent	White

[1] Not recommended for new design.
[2] To be used only to enable the engraving of color legends when required. Only the legend will show in color. The black color shall be lusterless
[3] From MIL-DTL-3661/5

Referenced documents. In addition to MIL-DTL-3661, this document references the following:
MIL-DTL-3661/5

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - CR
Navy – EC
Air Force – 71
DLA – GS2

Preparing Activity:
DLA – CC
(Project 6210-2024-016)

Review Activities:
Army – CR4
Navy – AS, MC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:52Z
Check the source to verify that this is the current version before use.