
MILITARY SPECIFICATION SHEET

LENSES, INDICATOR-LIGHT, DRIPPROOF, STYLE LC19

The complete requirements for procuring the lenses described herein shall consist of this document and the latest issue of Specification MIL-L-3661.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

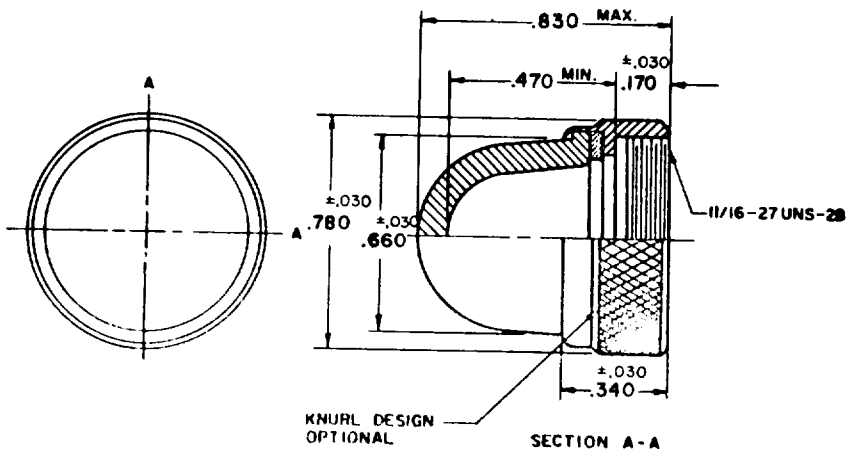

INCHES	MM
.030	.76
.170	4.32
.340	8.64
.470	11.94
.660	16.76
.780	19.81
.830	21.08

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

Ⓑ denotes changes.

FSC 6210

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:55Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Design and construction: See figure.
2. Lens torque: 6 pound-inches.
3. Temperature cycling: -55°C to +125°C.
4. Sealing: Dripproof.

Type designation	Mating holder	Lens material	Transmittance	Lens color
LC19RN3	LH77/1, 2, 3	Plastic	Nondiffusing	Red
LC19GN3	LH77/3	Plastic	Nondiffusing	Green
LC19YN3	LH77/1, 2, 3	Plastic	Nondiffusing	Yellow
LC19BN3	LH77/3	Plastic	Nondiffusing	Blue
LC19CN3	LH77/1, 2, 3	Plastic	Nondiffusing	Colorless
LC19RD3	LH77/1, 2, 3	Plastic	Diffusing	Red
LC19GD3	LH77/3	Plastic	Diffusing	Green
LC19YD3	LH77/1, 2, 3	Plastic	Diffusing	Yellow
LC19BD3	LH77/3	Plastic	Diffusing	Blue
LC19CD3	LH77/1, 2, 3	Plastic	Diffusing	Colorless
LC19WT3	LH77/3	Plastic	Translucent	White

Ⓑ NOTE: Glass lenses, previously identified by symbol 1, are inactive for new design. Symbol 3 lenses with equivalent colors and transmittance shall be used as replacements.

Custodians:
Army - EL
Navy - EC
Air Force - 82

Review activities:
Army - MI, MU
Navy - AS
Air Force -
DSA - GS

User activities:
Army - AT, AV,
Navy - MC, SH, OS
Air Force -

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 6210-0429)

☆ U. S. GOVERNMENT PRINTING OFFICE: 1974/713-155/6694

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:55Z
Check the source to verify that this is the current version before use.