
SUPERSEDING
MIL-L-3661/9A
27 MARCH 1967

MILITARY SPECIFICATION SHEET

HOUSINGS, INDICATOR-LIGHT, STYLE LH77

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the indicator lights (housing) described herein shall consist of this document and the latest issue of MIL-L-3661.

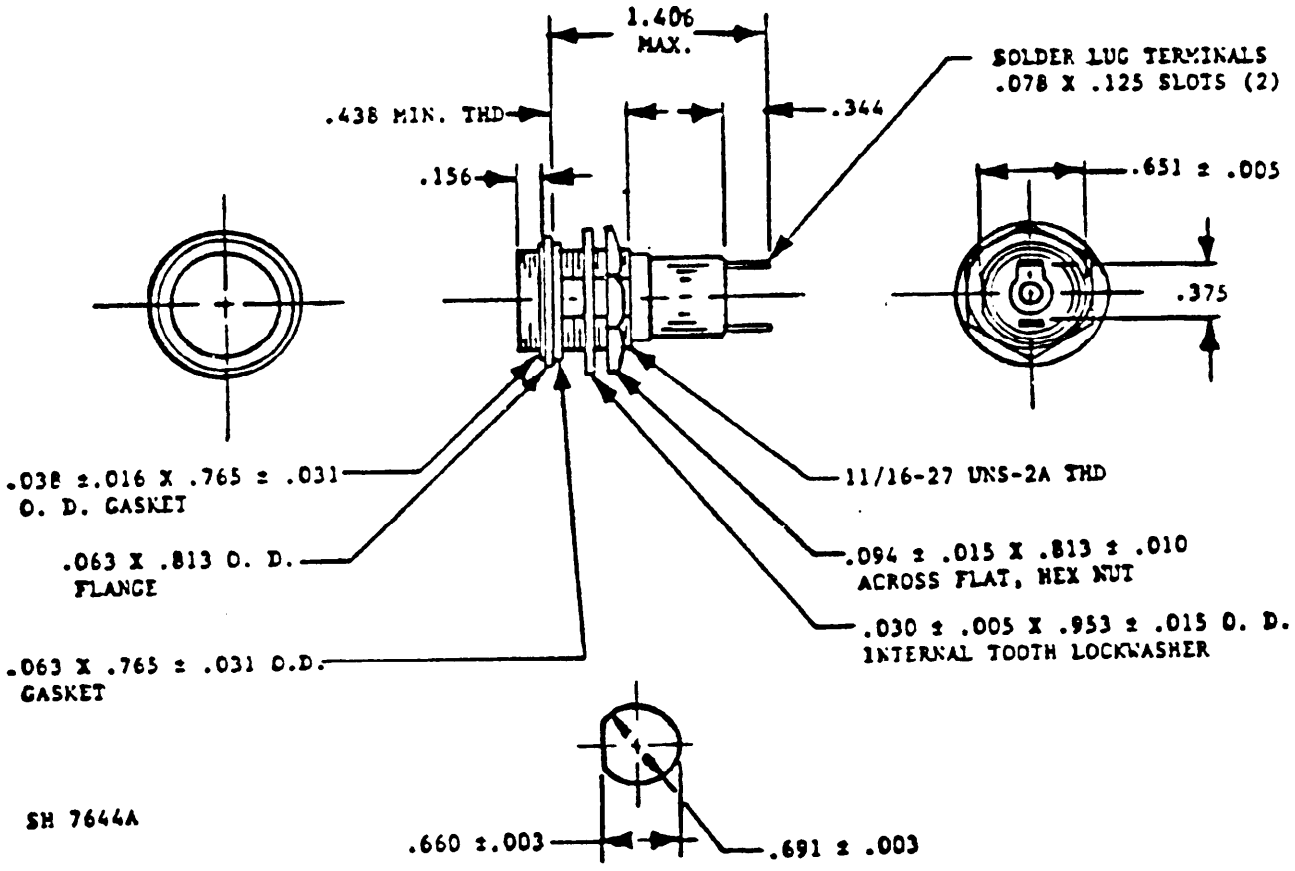

RECOMMENDED MOUNTING HOLE

FIGURE 1. DIMENSIONS AND CONFIGURATION

(B) DENOTES CHANGES

AMSC N/A

FSC 6210

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:51Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm
.003	.08	.063	1.59	.651	16.54
.005	.13	.078	1.98	.660	16.76
.010	.25	.094	2.39	.688	17.46
.015	.38	.125	3.18	.691	17.55
.016	.41	.156	3.97	.765	19.43
.030	.76	.344	8.73	.813	20.64
.031	.79	.375	9.53	.953	24.21
.038	.97	.438	11.11	1.406	35.72

NOTES:

1. All dimensions are in inches. Uless otherwise specified, tolerances are ± 1/32 inch.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Housing and terminal design optional provided the dimensions fall within the configuration shown.

REQUIREMENTS:

1. Design and construction: See figure.
2. Terminal strength: 5 pounds.
3. Socket torque: 2 pound-inches.

QUALIFICATION INSPECTION:

Group submission:

Ⓑ Table I

Type designation	Tests MIL-L-3661	Extent of approval
LH77/1	(12 sample units) All tests of Table V	All
LH77/2 LH77/3	(2 sample units each) Group 1 of Table V (Visual and mechanical examination only)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:51Z
Check the source to verify that this is the current version before use.

(B) Table II

Type designation	Mating lens	Internal resistor	Lamp accommodation T-3 1/4 miniature bayonet base
LH77/1	LC19, LC20	100K ohm	Neon NE-51[1]
LH77/2	LC19, LC20	27K ohm	Neon NE-51H[1]
LH77/3	LC19, LC20	None	Incandesent[2] M15098/10-001R (NE-51R) M15098/10-002R (NE-51HR)

[1]NE51 105V - 125V AC/DC. NE51H 100V - 125V AC.
[2]Industry number 47 and 1815.

Custodians:
Army - CR
Navy - EC
Air Force - 99

Review activities:
Army - AR, EA, MI
Navy - AS
Air Force - 11
DLA - GS

User activities:
Army - ME
Navy - MC

Preparing activity:
Navy - EC

Agent:
DLA - GS
(Project 6210-1013)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T20:51Z
Check the source to verify that this is the current version before use.