
FED SUP CLASS
5935

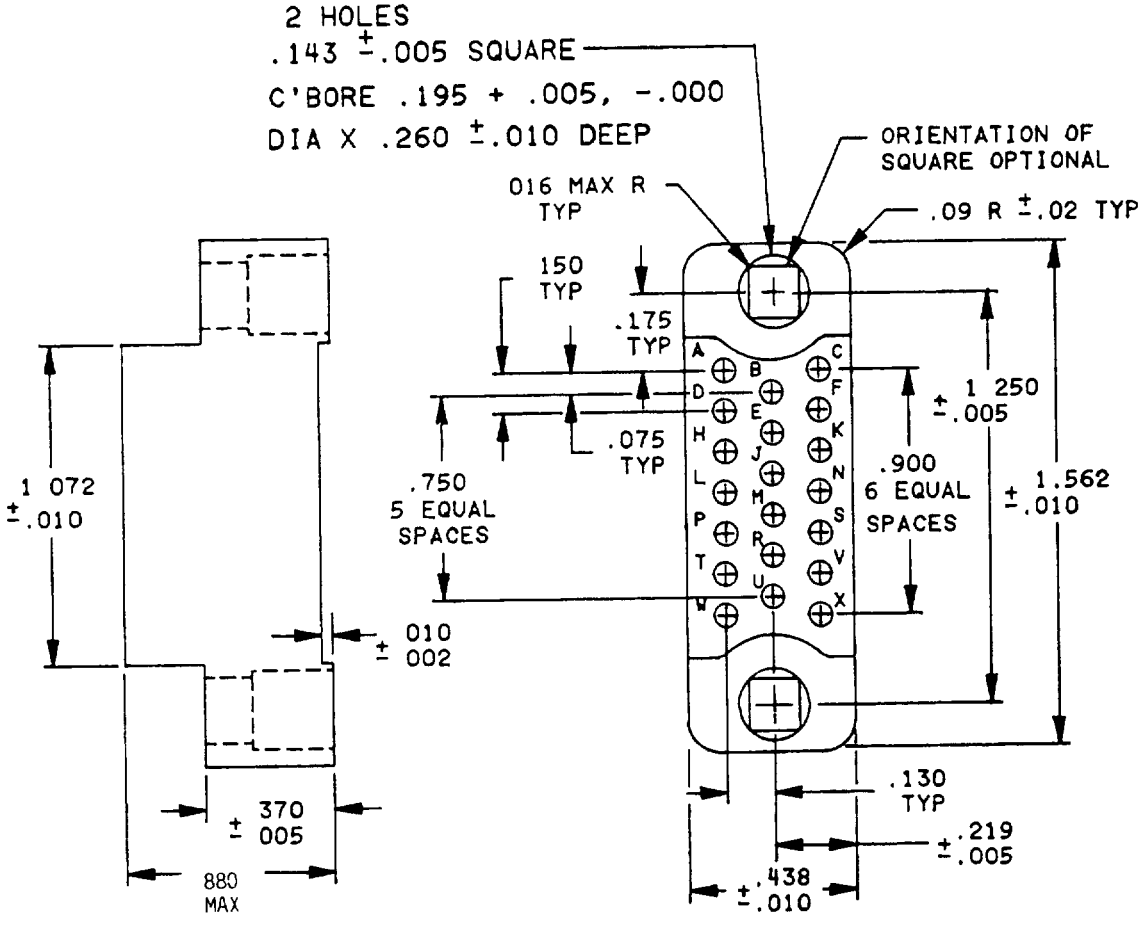

MS PART NO. MS 18177-1

DESIGN STANDARD FOR USE WITH MIL-C-28748/4.

Ⓒ denotes changes

APPROVED 20 December 1965 REVISED Ⓐ 20 May 1970 Ⓑ 23 June 1972 Ⓒ 18 March 1985

Preparing activity: Navy - EC Other Cognizant activities: AF-85 Army - CR	International interest	TITLE Insert (insulator), rectangular connector, electrical, 20 (size 16 and 20 crimp removable) socket contacts	MILITARY STANDARD MS18177
Procurement Specification MIL-C-28748		SUPERSEDES	PAGE 1 OF 2

DD FORM 1 MAY 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5935-3480-8

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:16Z
Check the source to verify that this is the current version before use.

IN.	MM
.002	.05
.004	.10
.005	.13
.010	.25
.016	.41
.02	.51
.075	1.91
.09	2.29
.130	3.30
.143	3.63
.150	3.81
.175	4.45
.195	4.95
.219	5.56
.260	6.60
.370	9.40
.438	11.13
.51	12.95
.750	19.05
.856	21.74
.900	22.86
1.072	27.23
1.250	31.75
1.562	39.67
2.290	58.17

NOTES.
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.015 (0.38 mm).
3. Metric equivalents (to the nearest 0.01 mm) are given for general information only.
4. Tolerance between any two adjacent contact centers shall be ±.004 (0.10 mm). Tolerance between any two contact centers, other than adjacent contacts, shall be ±.006 (0.15 mm).
5. Contact identification may be located on either side of the contact hole but shall appear on the front and rear of each insert.
6. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
7. Referenced documents shall be of the issue in effect on date of invitation for bid.
(C) 8. Designed for use with MIL-C-39029/35 contacts.
9. Contact hole details shall be in accordance with MIL-C-28748.
10. The maximum insertion and withdrawal force (connector assembly) shall be 25 pounds.
11. Insert material shall be in accordance with MIL-C-28748.

APPROVED 20 December 1965 REVISED (A) 20 May 1970 (B) 23 June 1972 (C) for changes see page 2 of 2

User activities
Army - ME, AV, AR
Navy - MC, OS
Air Force -

Review activities
Army - MI, AT
Navy - AS, SH
Air Force - 11
DLA-ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

P A Navy - EC Other Cus AF-85 Army - CR	International interest	TITLE Insert (insulator), rectangular connector, electrical, 20 (size 16 and 20 crimp removable) socket contacts	MILITARY STANDARD MS18177
Procurement Specification MIL-C-28748		SUPERSEDES	PAGE 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:16Z
Check the source to verify that this is the current version before use.