
CANCELED AFTER 25 APRIL 1962. USE MS49006.

FED. SUP CLASS 4730

INTERCHANGEABILITY RELATIONSHIP; MS21339 PARTS ARE INTERCHANGEABLE WITH MS49006 PARTS OF THE SAME NOMINAL SIZE AND MATERIAL AND SHOULD BE USED UNTIL EXISTING STOCK IS DEPLETED. USE ONLY THE SUPERSEDING MS PARTS FOR DESIGN AND REPLACEMENT.

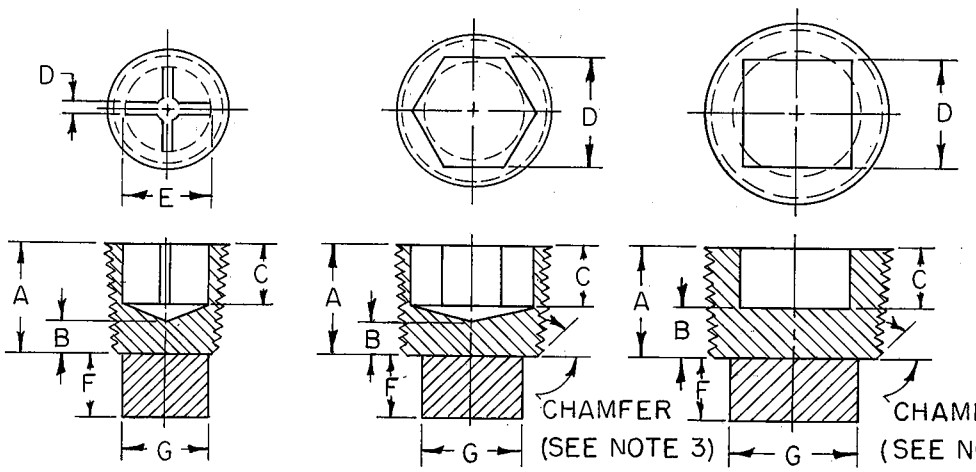

DASH NO.	NOM. SIZE NPTF	THREAD	A MIN	A MAX	B MIN	C MIN	D MIN	D MAX	E MIN	F MAX	G MAX	TEST LIFT OZ, MIN	HEAD STYLE
1	1/8	27	.260	.280	.06	.125	.050	.078	.270	.062	.25	2	CROSS SLOTTED
2	1/4	18	.395	.425	.09	.156	.060	.103	.339	.190	.32	4	
3	3/8	18	.395	.425	.13	.156	.060	.131	.407	.190	.32	4	
4	1/2	14	.520	.560	.16	.1875	.375	.380		.40	.50	6	HEX RECESS
5	3/4	14	.530	.570	.18	.1875	.563	.568		.70	.70	6	
6	1	11½	.670	.710	.20	.250	.625	.630		.70	.70	6	
7	1-1/4	11½	.80	.85	.22	.4375	.76	.77		.70	1.10	6	SQUARE RECESS
8	1-1/2	11½	.83	.88	.24	.4375	.76	.77		.70	1.10	6	
9	2	11½	.88	.94	.26	.4375	.88	.90		.70	1.10	6	
10	2-1/2	8	1.07	1.13	.29	.500	1.14	1.16		.70	1.10	6	
11	3	8	1.13	1.20	.31	.500	1.39	1.42		.70	1.10	6	
12	3-1/2	8	1.18	1.25	.34	.500	1.52	1.55		.70	1.10	6	
13	4	8	1.22	1.30	.37	.500	2.02	2.05		.70	1.10	6	

MATERIAL: PLUG BODY; STEEL, CARBON; QQ-S-633 OR QQ-W-461, LOW CARBON GRADE, OR IRON, MALLEABLE; QQ-I-666, GRADE I OR II.

MAGNET: CLASS B4 OR B9 OF FED SPEC QQ-M-60 (MECHANICALLY ATTACHED)

PROTECTIVE FINISH: PLUG BODY, BLACK OXIDE, MIL-C-13924

THREADS: THREADS SHALL BE "DRY SEAL" NPTF-(SHORT) IN ACCORDANCE WITH HANDBOOK H28.

RECESS TAPER: THE OPPOSITE SIDES OF SQUARE AND HEXAGON RECESSES SHALL BE PARALLEL, BUT MAY HAVE A TAPER NOT IN EXCESS OF 4° TOTAL.

NOTES:

(1) PLUGS MAY BE FABRICATED BY CASTING, FORGING, OR MACHINING.

(2) DIMENSIONS ARE IN INCHES.

(3) THE POINTS SHALL BE FLAT AND NORMAL TO THE AXIS OF THE PLUG. THE ENTERING END SHALL BE CHAMFERED AT AN ANGLE OF 45° TO 60° WITH THE AXIS OF THE THREAD. CHAMFER SHALL EXTEND 0.020 BEYOND THE MINOR DIAMETER OF THE THREAD ± 0.020. THE CHAMFER SHALL BE INCLUDED IN MEASUREMENTS OF THREAD LENGTH.

(4) THE "MS" PART NUMBER CONSISTS OF THE MS NUMBER, PLUS THE DASH NUMBER. EXAMPLE: MS21339-4.

(5) THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

(6) REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT OF THE DATE OF INVITATION FOR BID.

(7) THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 90 DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN, AND SHALL TAKE PRECEDENCE WHEN IN CONFLICT WITH OTHER DOCUMENTS REFERENCED HEREIN.

(A) CANCELLED AFTER, 25 APRIL 1962. USE MS49006

APPROVED 14 FEB 61 REVISED (A) 25 APRIL 1962

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. A - ORD Other Cust N - Docks AF - MOA	TITLE PLUGS, PIPE, MAGNETIC, IRON OR STEEL	MILITARY STANDARD MS21339
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 57 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-04-23T14:32Z
Check the source to verify that this is the current version before use.