
DISTRIBUTION STATEMENT A. Approved for public release ; distribution is unlimited.
NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

FED SUP CLASS.
1670

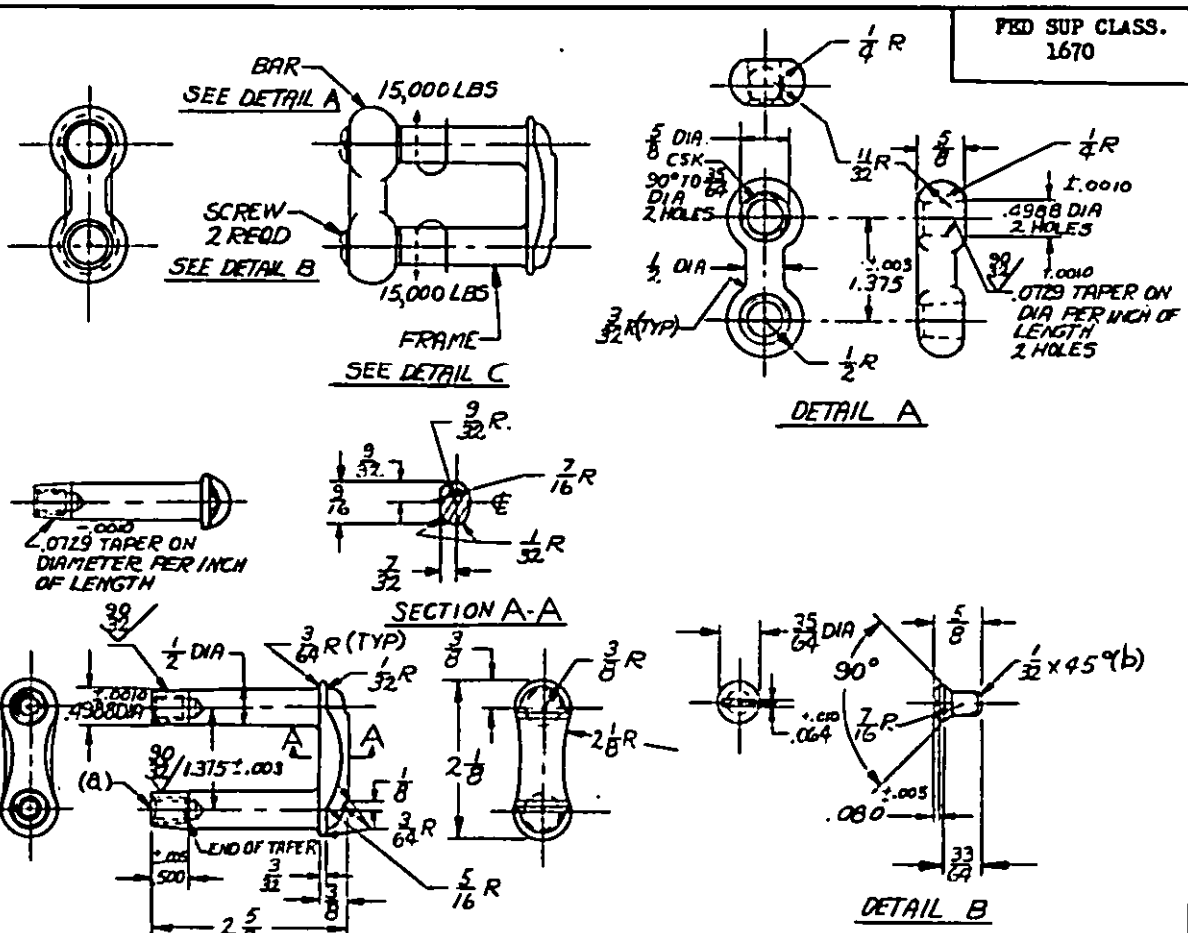


| MS PART NO. | FIIN |
|---|---|
| MS24553-1 | |

(A).

1. MINOR DIA .2854 +.0027, DEPTH 9/16, C'SINK 90° TO .375 +.000 DIA, TAP 5/16-40 NS-2, .2963 ±.0030 PITCH DIA, DEPTH 1/2 MIN, 2 HOLES -.015

   THREAD 5/16-40 NS-2, PITCH DIA .2963 -.0030, MAJOR DIA .3125 -.0048. THE COMPLETE THREAD SHALL EXTEND TO WITHIN TWO THREADS OF THE BEARING SURFACE OF THE HEAD OR CLOSER, IF PRACTICABLE.

2. LINK SHALL BE SUBJECTED TO THE PROOF LOADS SPECIFIED HEREON, AS INDICATED BY THE ARROWS.

3. MATERIAL: STEEL SPEC MIL-S-5626, OPTIONAL SPECS: MIL-S-6049, MIL-6758, MIL-S-6050.

4. FINISH: CADMIUM PLATE, TYPE 1, CLASS 3, QQ-P-416 - ALL PARTS BEFORE ASSEMBLY.

5. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64, ANGLES ±1°. 125 ALL OVER EXCEPT AS NOTED. SURFACE ROUGHNESS, MIL-STD-10, APPLICABLE AFTER PLATING.

6. BREAK ALL SHARP EDGES .010 MAX.

7. HEAT TREAT ALL PARTS TO 160,000 TO 180,000 PSI TENSILE STRENGTH, SPEC MIL-H-6875.

APPROVED 21 MAY 1958 REVISED (A) 28 MAR 86

| P.A. | OTHER INT. | MILITARY STANDARD | MS24553 (USAF) |
|---|---|---|---|
| 82<br>Other Cust.<br>99 | A -<br>N -<br>AF - | LINK, CONNECTOR, PARACHUTE - SEPARABLE, HEAVY DUTY, ASSEMBLY OF | |
| Procurement Specification<br>MIL-H-7195 | | SUPERSEDES:<br>USAF DRAWINGS 55B6427, 55C6428, 55B6429, 55A6430 | SHEET 1 OF 2 |

DD FORM 672
1 OCT 82

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:56Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
1670

(A)

8. END ITEM EXAMINATION

A. CRITICAL DIMENSIONS: NONE.

B. CRITICAL FUNCTIONSL TEST: NONE.

C. ASSEMBLY FEATURES: MUST ACCEPT A MINIMUM OF 8 FULL TURNS OF SCREW WHEN ASSEMBLED.

D. OPTIONAL MATERIAL: SCREW; STEEL, 4037H, FED-STD-66.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

THIS STANDARD HAS BEEN APPROVED BY THE DEPARTMENT OF THE AIR FORCE AND IS MANDATORY FOR USE BY THAT DEPARTMENT. ALL OTHER MILITARY ACTIVITIES ARE REQUIRED TO EMPLOY THIS STANDARD WHERE SUITABLE.

APPROVED (A) REVISED

This standard has been approved by the Department of the and is mandatory for use by this activity. All other military activities are required to employ this standard where suitable.

| P.A. 82 Other Cust 99 | TITLE LINK, CONNECTOR, PARACHUTE - SEPARABLE, HEAVY DUTY, ASSEMBLY OF | MILITARY STANDARD MS 24553 |
|---|---|---|
| Procurement Specification MIL-H-7195 | SUPERSEDES: | SHEET 2 OF 2 |

DD FORM 1 SEP 63 672 (Limited coordination) EDITION OF 1 SEP 57 MAY BE USED.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T14:56Z
Check the source to verify that this is the current version before use.