NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission, to manufacture, use, or sell any patented invention that may in any way be related thereto.

FED. SUP CLASS
5305

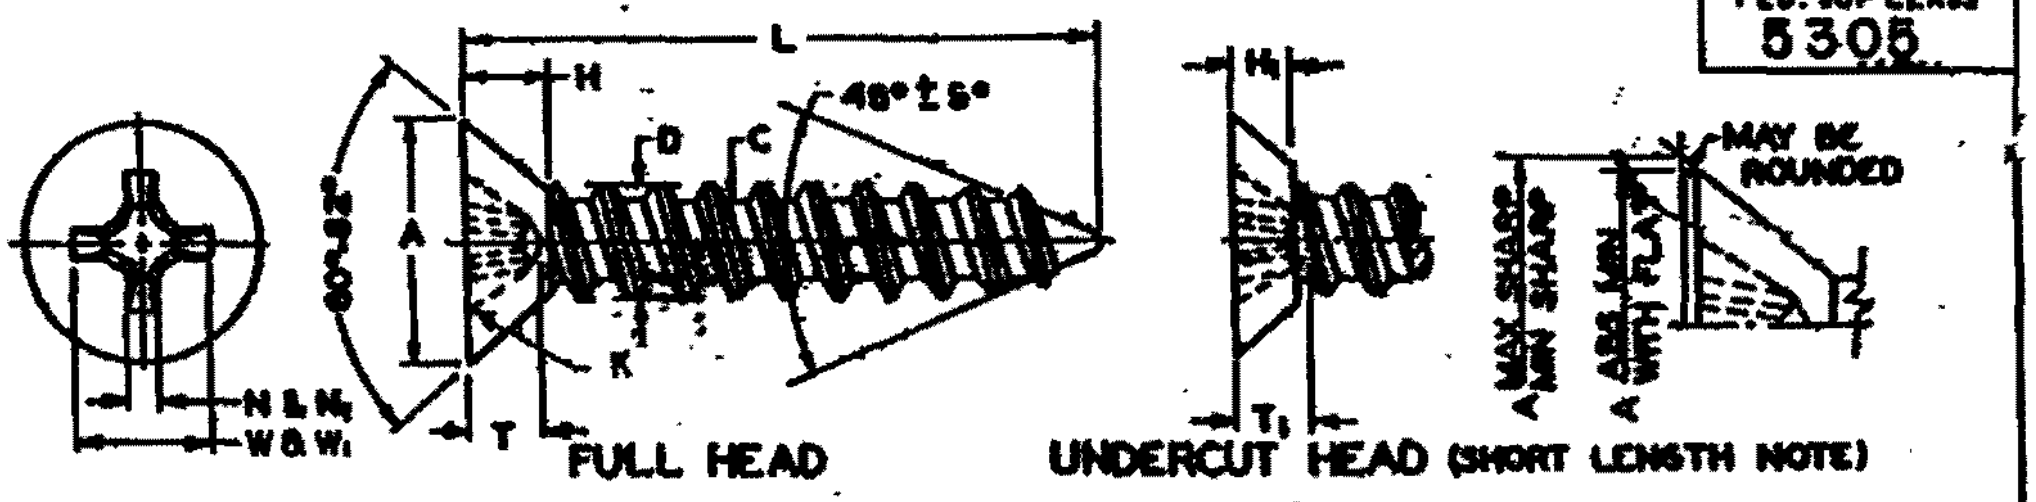

NOMINAL SIZE				4 (.112)	6 (.138)	8 (.164)	10 (.190)	12 (.216)	14 (.242)
THREADS PER INCH				24	18 / 20*	15 / 18*	12 / 16*	11	10
MAJOR DIAMETER		D	MAX	.114	.141	.168	.194	.221	.254
			MIN	.110	.136	.162	.188	.215	.248
MINOR DIAMETER		C	MAX	.083	.102	.123	.133	.162	.185
			MIN	.078	.096	.116	.126	.155	.178
HEAD DIAMETER		A	MAX SHARP	.225	.279	.332	.385	.438	.491
			MIN SHARP	.207	.257	.308	.359	.410	.461
			ABS MIN	.195	.244	.292	.340	.389	.437
FULL HEAD	HEAD HEIGHT	H	REF	.067	.083	.100	.116	.132	.148
	RECESS DIAMETER	W	MAX	.128	.174	.189	.204	.268	.283
			MIN	.115	.161	.176	.191	.255	.270
	RECESS DEPTH	T	MAX	.089	.106	.121	.136	.156	.171
			MIN	.073	.083	.098	.113	.133	.148
	RECESS WIDTH	N	MIN	.018	.029	.031	.032	.035	.036
	DEPTH OF GAGE PENETRATION		MAX	.082	.095	.110	.125	.139	.154
			MIN	.066	.072	.087	.102	.116	.131
UNDER CUT HEAD	HEAD HEIGHT	H₁	MAX	.047	.059	.070	.081	.092	.104
			MIN	.038	.048	.058	.068	.078	.088
	RECESS DIAMETER	W₁	MAX	.116	.149	.174	.189	.233	.250
			MIN	.103	.136	.161	.176	.220	.237
	RECESS DEPTH	T₁	MAX	.078	.098	.106	.121	.121	.136
			MIN	.062	.085	.083	.098	.101	.116
	RECESS WIDTH	N₁	MIN	.018	.025	.029	.031	.030	.032
	DEPTH OF GAGE PENETRATION		MAX	.071	.064	.095	.110	.104	.119
			MIN	.055	.042	.072	.087	.081	.096
RADIUS		K		.020	.025	.025	.025	.030	.030
DRIVER SIZE				1	2	2	2	3	3

LENGTH L	TOLERANCE	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
1/4	± 1/32	1					
5/16		[illegible]	12				
3/8		3	13	24	35		
1/2		4	14	25	36		
5/8		5	15	26	37		
3/4		6	16	27	38	49	60
7/8			17	28	39	50	61
1			18	29	40	51	62
1-1/4	± 3/64			30	41	52	63
1-1/2				31	42	53	64
1-3/4					43		65
2					44		66

MATERIAL: Steel, carbon, in accordance with procurement specification.
FINISH: Cadmium plated in accordance with Federal Specification QQ-P-416, Type II, Class 3.
THREADS: Thread types to be in accordance with applicable requirements of procurement specification.
HEAT TREATMENT: Case hardened or heat treatment to meet performance requirements of procurement specification.
RECESS: Except for dimensions W, T, N, K and Depth of Gage Penetration the recess shall be in accordance with MS 9006.
* SHORT LENGTHS: Lengths above dotted line have fine pitch threads and undercut heads as indicated.(Size 4 undercut head only)
HOLE SIZES: For approximate hole sizes see MS 24631.
DIMENSIONS: All dimensions are in inches unless otherwise specified.
PART NUMBER: The MS part number consists of the MS number plus the dash number. Example MS 24615-1.
NOTES: (1) For design feature purposes, this standard takes precedence over procurement documents referenced herein.
(2) Referenced documents shall be of the issue in effect on date of invitations for bid.

Ⓐ ENTIRE STANDARD REVISED

REVISED Ⓐ 25 Feb 1963
APPROVED 5 Oct 59

P.A. MD(ESDL) Other Cust SHIPS NOA	TITLE SCREW, TAPPING-THREAD FORMING, TYPE A, FLAT 82° COUNTERSUNK HEAD, CROSS RECESSED, STEEL, CARBON, CADMIUM PLATED	MILITARY STANDARD MS 24615
PROCUREMENT SPECIFICATION FF-S-107	SUPERSEDES: MS 24635	SHEET 1 OF 2

DD FORM 672-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:58Z
Check the source to verify that this is the current version before use.